

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
June 19, 2008

HOBBS OGD

APR 04 2012

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	WELL API NO. 30-025-31247
2. Name of Operator XTO Energy, Inc.	5. Indicate Type of Lease STATE ☒ FEE ☐
3. Address of Operator 200 N. Loraine, Ste. 800 Midland, TX 79701	6. State Oil & Gas Lease No. _____
4. Well Location Unit Letter <u>J</u> : <u>1980'</u> feet from the <u>South</u> line and <u>2080'</u> feet from the <u>East</u> line Section <u>36</u> Township <u>21S</u> Range <u>36E</u> NMPM County <u>Lea</u>	7. Lease Name or Unit Agreement Name: Arrowhead Grayburg Unit
	8. Well Number 131
	9. OGRID Number 005380
	10. Pool name or Wildcat Arrowhead: Grayburg
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. PU & RIH w/notched collar & scraper WS to CIBP at +/- 3600', circ csg w/9ppg mud (min 90bbls).
2. Spot balanced cmt plug (25sxs) from CIBP to 3400', circ clean w/plug mud, WOC 4hrs, tag cmt @3400'
3. RIH & perf csg from 1250-1260' w/lspf at 90 degree phasing, est inj rate in perfs w/plug mud before RIH w/CICR.
4. RIH w/CICR to 1000', squeeze cmt plug (300sxs) from 1000' out perfs at 1260' and out annulus, sting out CICR and rev circ clean w plug mud, PH
5. Pump cmt plug 36sxs from 300' to surface, WOC 4 hrs.
6. RDMO, cut off WH & anchors, install dry hole mark, re-seed and reclaim location

Spud Date:

Rig #

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Patty Urias TITLE Regulatory Analyst DATE 04/02/12
Type or print name Patty Urias E-mail address: patty_urias@xtoenergy.com PHONE 432-620-4318

For State Use Only

APPROVED BY [Signature] TITLE Staff MGR DATE 4-4-2012
Conditions of Approval (if any):

APR 04 2012

AGU #131 WELLBORE DIAGRAM

CURRENT WELL DATA SHEET

FIELD: Arrowhead

WELL NAME: AGU No. 131

FORMATION: Grayburg

LOC: 1980' FSL & 2080' FEL
TOWNSHIP: 21-S
RANGE: 36-E

SEC: 36
COUNTY: Lea
STATE: NM

GL: 3504'
KB to GL: 13.0'
DF to GL: 12.0'

CURRENT STATUS: Producer
API NO: 30-025-31247
CHEVNO: ICZ-1469

DATA

LOCATION: 1980' FSL & 2680' FEL, SEC 36, T21S, R36E

COUNTY/STATE: LEA, NM

FIELD: ARROWHEAD

FORMATION: GRAYBURG

SPUD DATE:

COMPLETION DATE: 4/7/92

API# 30-025-81247

STATUS:

IP: 1 BOPD / -0- BOPD / -0- MCFGPD

WELL HISTORY

COMPLETION DATA:

INITIAL FORMATION: GRAYBURG FROM: 3679' TO: 3866'

09/23/91: SPUD & DRILL TO 3655'. CORE 3655' - 3874' IN 4 RUNS. DRILL 3874' - 3895' & CIRC HOLE CLEAN. LOG ATLAS CNL-LDT-PE-GR, BHC-SONIC, DLL-MLL, DIELECTRIC & FMT. RUN 5-1/2" CSG. DO CMT & FC TO 3885' & CIRC HOLE CLEAN. RUN SCHL DEPTH CTL LOG & SELECTIVELY PERF 3679' - 3870' W/ 2 SPF. SELECTIVELY ACDZ (PPI PKR) W/ 1950 GALS 15% NEFE HCL (COULD NOT BD 3736-38'). SWB REC 242 BW, SFL 1100'. SWB 3804'-70' (ZN'S 4-5) REC 69 BW; SFL 1100', FER 39 BPH. SWB 3679'-3764' (ZN'S 1-3) REC 101 BW / 10 RUNS; SFL @ 1100', FER 33 BPH. SWB 3679'-3738' (ZN'S 1&2) REC 15 BW / 2 RUNS & SWB DRY; SFL @ 1100', FER 1.5 BPH (ONFE 7.8 BBL'S). CIRC @ 3750'. SQZ 3679' - 3870' (ZN'S 1-5) W/ 200 SXS CMT. DO CMT & CIRC CLEAN. PERF 3818-26' (ZN 4) W/ 2 SPF. SWB REC 21 BW / 6 RUNS; IFL @ SURF, FER 0.5 BPH. ACDZ W/ 150 GALS 15% NEFE HCL. SWB REC 25 BW / 7 RUNS IN 7 HRS.; IFL @ 250', FER 1 BPH. SELECTIVELY PERF 3679'-3808' (ZN'S 1-4) W/ 2 SPF (TTL 62 HOLES). SELECTIVELY ACDZ (PPI PKR) W/ 1,350 GALS 15% NEFE HCL (150 GALS IN EACH OF 9 INTERVALS). SWB 33 BW / 13 RUNS IN 8 HRS. & SWB DRY; IFL @ 3000', FER 1 BPH. RIH W/ PROD TBG & RWTP.

ADDITIONAL DATA:

T/QUEEN @ 3382'

T/PENROSE @ 3468'

T/AGU @ 3664'

T/GRAYBURG ZONE 1 @ 3664'

T/GRAYBURG ZONE 2 @ 3697'

T/GRAYBURG ZONE 3 @ 3759'

T/GRAYBURG ZONE 4 @ 3791'

T/GRAYBURG ZONE 5 @ 3840'

EST T/SAN ANDRES @ 3879'


8-5/8" OD, 23#, M-60
Surf. Pipe set @ 1160'
w/ 725 sxs cmt. Circ.
10 sxs to surf.

Existing: CIBP at "Unknown"

5-1/2" OD, 15.5#, K-55
csg set @ 3898' w/ 950 sxs
TOC @ 1263' by TS.

FC @ 3852'

MRV: 12/23/97

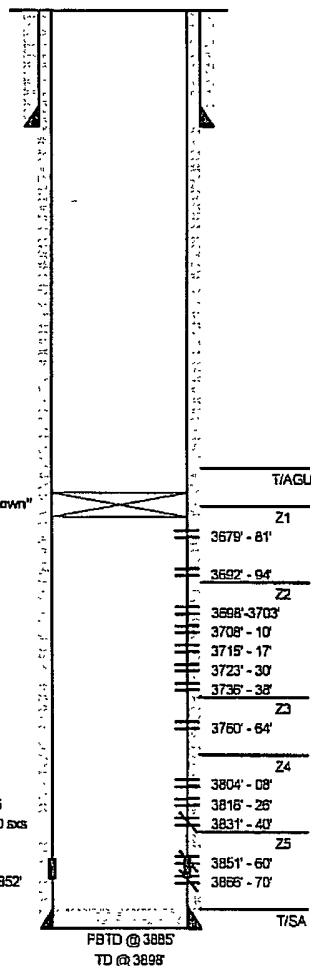

AGU #131 WELLBORE DIAGRAM

Proposed

CURRENT WELL DATA SHEET

FIELD: Arrowhead

WELL NAME: AGU No. 131

FORMATION: Grayburg

LOC: 1980' FSL & 2080' FEL
TOWNSHIP: 21-S
RANGE: 36-E

SEC: 36
COUNTY: Lea
STATE: NM

GL: 3504'
KB to GL: 13.0'
DF to GL: 12.0'

CURRENT STATUS: Producer
API NO: 30-025-31247
CHEVNO: KZ-1469

DATA

LOCATION: 1980' FSL & 2680' FEL, SEC 36, T21S, R36E

COUNTY/STATE: LEA, NMD

FIELD: ARROWHEAD

FORMATION: GRAYBURG

SPUD DATE:

COMPLETION DATE: 4/7/92

API# 30-025-81247

STATUS:

IP: 1 BOPD / -0- BWPD / -0- MCFGPD

WELL HISTORY

COMPLETION DATA:

INITIAL FORMATION: GRAYBURG FROM: 3679' TO: 3866'

09/23/91: SPUD & DRILL TO 3655'. CORE 3655' - 3874' IN 4 RUNS. DRILL 3874' - 3895' & CIRC HOLE CLEAN. LOG ATLAS CNL-LDT-PE-GR, BHC-SONIC, DLL-MLL, DIELECTRIC & FMT. RUN 5-1/2" CSG. DO CMT & FC TO 3885' & CIRC HOLE CLEAN. RUN SCHL DEPTH CTL LOG & SELECTIVELY PERF 3678' - 3870' W/ 2 SPF. SELECTIVELY ACDZ (PPI PKR) W/ 1950 GALS 15% NEFE HCL (COULD NOT BD 3736-38'). SWB REC 242 BW, SFL 1100'. SWB 3804'-70' (ZN'S 4-5) REC 69 BW; SFL 1100', FER 39 BPH. SWB 3679'-3764' (ZN'S 1-3) REC 101 BW / 10 RUNS; SFL @ 1100', FER 33 BPH. SWB 3679'-3738' (ZN'S 1&2) REC 15 BW / 2 RUNS & SWB DRY; SFL @ 1100', FER 1.5 BPH (ONFE 7.8 BBLs). CIRC @ 3750'. SQZ 3679' - 3870' (ZN'S 1-5) W/ 200 SXS CMT. DO CMT & CIRC CLEAN. PERF 3818-26' (ZN 4) W/ 2 SPF. SWB REC 21 BW / 6 RUNS; IFL @ SURF, FER 0.5 BPH. ACDZ W/ 150 GALS 15% NEFE HCL. SWB REC 25 BW / 7 RUNS IN 7 HRS.; IFL @ 250', FER 1 BPH. SELECTIVELY PERF 3679'-3808' (ZN'S 1-4) W/ 2 SPF (TTL 62 HOLES). SELECTIVELY ACDZ (PPI PKR) W/ 1,350 GALS 15% NEFE HCL (150 GALS IN EACH OF 9 INTERVALS). SWB 33 BW / 13 RUNS IN 8 HRS. & SWB DRY; IFL @ 3000', FER 1 BPH. RIH W/ PROD TBG & RWTP.

ADDITIONAL DATA:

T/QUEEN @ 3382'

T/PENROSE @ 3468'

T/AGU @ 3664'

T/GRAYBURG ZONE 1 @ 3664'


T/GRAYBURG ZONE 2 @ 3697'

T/GRAYBURG ZONE 3 @ 3759'

T/GRAYBURG ZONE 4 @ 3791'

T/GRAYBURG ZONE 5 @ 3840'

EST T/SAN ANDRES @ 3879'

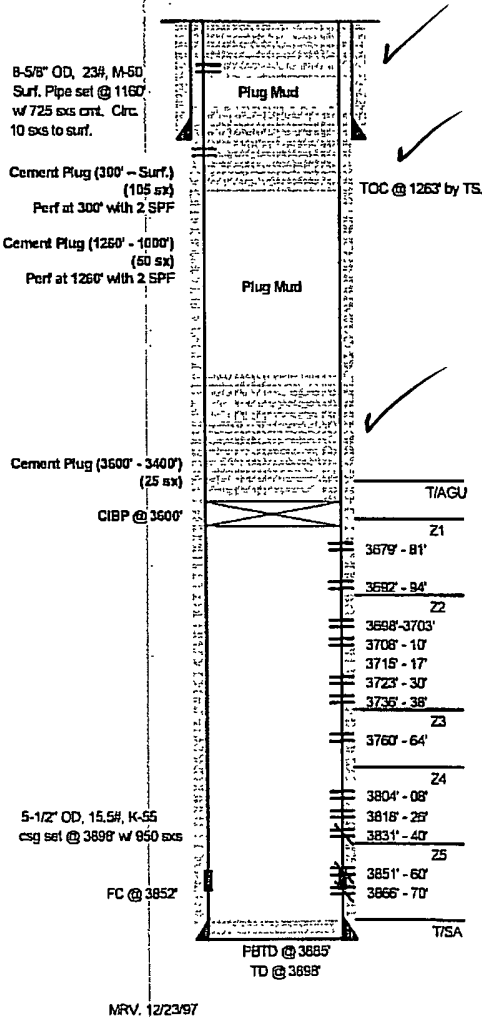

W:\WELL SKETCHES\AGU WELLBORE DIAGRAMS\AGU #131

PAC REVISED 8/7/09
PAGE 1 OF 1