

Submit 1 Copy To Appropriate District Office  
District I - (575) 393-6161  
1625 N French Dr, Hobbs, NM 88240  
District II - (575) 748-1283  
811 S First St, Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd, Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S St Francis Dr, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
Revised August 1, 2011

OIL CONSERVATION DIVISION

220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO  
30-025-10904 ✓  
5 Indicate Type of Lease  
STATE ☐ FEE ☒ ✓  
6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well. Oil Well ☐ Gas Well ☐ Other Injection

2. Name of Operator  
OXY USA WTP Limited Partnership

3 Address of Operator  
P.O. Box 50250 Midland, TX 79710

4 Well Location  
Unit Letter G : 1980 feet from the North line and 1980 feet from the east line  
Section 31 Township 23S Range 37E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
3226'

7. Lease Name or Unit Agreement Name

Myers Langlie Mattix Unit

8. Well Number TS

9 OGRID Number 192463

10. Pool name or Wildcat

Langlie Mattix TR QUGB

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 19-15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-3682' PBTD-3658' Perfs-3560-3658'

7-5/8" 26# csg @ 1205' w/ 500sx, 9-7/8" hole, TOC-Surf-Circ  
5-1/2" 14# csg @ 3480' w/ 600sx, 6-3/4" hole, TOC-Surf-Circ  
4-1/2" liner @ 3422-3682' w/ 75sx, TOC-3422'-Circ

- 1 RIH & set CIBP @ 3510' M&P 45sx cmt to 3150' WOC-Tag
  - 2 M&P 25sx cmt @ 2800-2650' WOC-Tag
  3. M&P 25sx cmt @ 1280-1130' WOC-Tag
  4. M&P 45sx cmt @ 300' to surface
- 10# MLF between plugs

Spud Date:

Rig Release Date.

I hereby certify that the information above is true and complete to the best of my knowledge and belief

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 6/27/12

Type or print name \_\_\_\_\_ E-mail address. david\_stewart@oxy.com PHONE. 432-685-5717

For State Use Only

APPROVED BY Mark Brown TITLE Compliance Officer DATE 7/3/2012

Conditions of Approval (if any)

THE OIL CONSERVATION DIVISION MUST  
BE NOTIFIED 24 HOURS PRIOR TO THE  
BEGINNING OF PLUGGING OPERATIONS

JUL 03 2012

**OXY USA WTP LP - Proposed  
Myers Langlie Mattix Unit #73  
API No. 30-025-10904**

**45sx @ 300'-Surface**

**25sx @ 1280-1130' WOC-Tag**

**25sx @ 2800-2650' WOC-Tag**

**CIBP @ 3510' w/ 45sx cmt to 3150' WOC-Tag**

9-7/8" hole @ 1205'  
7-5/8" csg @ 1205'  
w/ 500sx-TOC-Surf-Circ

6-3/4" hole @ 3652'  
5-1/2" csg @ 3480'  
w/ 600sx-TOC-Surf-Circ


4-1/2" liner @ 3422-3682'  
w/ 75sx-TOC-3422'-Circ

Perfs @ 3560-3658'

TD-3682'

OXY USA WTP LP - Current  
Myers Langlie Mattix Unit #73  
API No. 30-025-10904

9-7/8" hole @ 1205'  
7-5/8" csg @ 1205'  
w/ 500sx-TOC-Surf-Circ

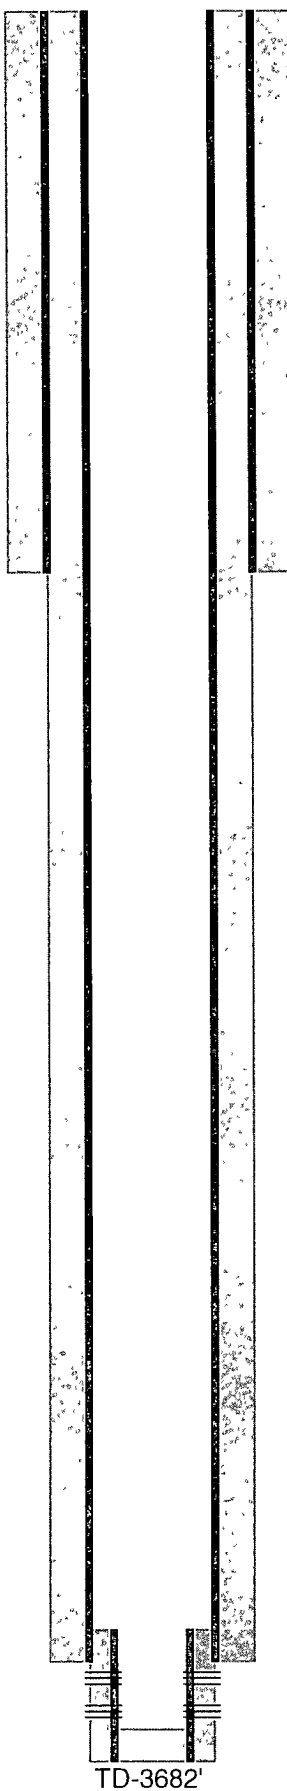

6-3/4" hole @ 3652'  
5-1/2" csg @ 3480'  
w/ 600sx-TOC-Surf-Circ

4-1/2" liner @ 3422-3682'  
w/ 75sx-TOC-3422'-Circ

Perfs @ 3560-3658'

TD-3682'