

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

HOBBS OGD
OCT 23 2012

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-29905 ✓
1. Type of Well: Oil Well ☐ Gas Well ☐ Other <u>INJECTION</u>		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator XTO ENERGY, INC. ATTN: STEPHANIE RABADUE		6. State Oil & Gas Lease No.
3. Address of Operator 200 N. LORLAINE, SUITE 800, MIDLAND, TEXAS 79701		7. Lease Name or Unit Agreement Name: EUNICE MONUMENT SOUTH UNIT ✓
4. Well Location Unit Letter <u>T</u> : <u>2194</u> feet from the <u>SOUTH</u> line and <u>640</u> feet from the <u>WEST</u> line Section <u>03</u> Township <u>21S</u> Range <u>36E</u> NMPM County <u>LEA</u>		8. Well Number #237 ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,561' - GR		9. OGRID Number 005380 ✓
		10. Pool name or Wildcat EUNICE MONUMENT; GRAYBURG/SAN ANDRES ✓

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC.. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) TAG EXISTING 5-1/2" CIBP @ +/-3,677'; CIRC. WELL W/ FXA MUD; PRES. TEST 5-1/2" CSG. TO 500#.
- 2) PUMP A 25 SX. CMT. PLUG @ 3,677'-3,477'.
- 3) PUMP A 25 SX. CMT. PLUG @ 2,586'-2,466' (T/YATES X B/SALT); WOC X TAG CMT. PLUG.
- 4) PUMP A 45 SX. CMT. PLUG @ 1,500'-1,172' (T/SALT, 8-5/8" CSG. SHOE X T/ANHY.); WOC X TAG CMT. PLUG.
- 5) MIX X CIRC. TO SURF. A 25 SX. CMT. PLUG @ 200'-3'.
- 6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyer TITLE AGENT DATE 10/22/12

Type or print name DAVID A. EYLER E-mail address: DEYLER@MILAGRO-RES.COM PHONE (432) 687-3033

For State Use Only

APPROVED BY [Signature] TITLE DIST MGR DATE 10-25-2012

Conditions of Approval (if any):

Oil Conservation Division - Hobbs office Must be Notified
24 hours prior to the beginning of Plugging Operations begin

OCT 25 2012

WELL NAME: EMSU 237
LOCATION: 2194' FSL & 640' FWL, SEC 3 T21S R36E
FORMATION: GRBG
SPUD DATE: 05/05/87
IP:

COUNTY/STATE: LEA, NM
LEASE: EUNICE MONUMENT
CURRENT STATUS: TA'D
COMPL DATE: 05/24/87
API No: 30-025-29905



12 1/4" HOLE

8 5/8" 24# CSG @ 1295'
CMT W/900 SX
CIRC TO SURF W/190 SX

ELEV
GL: 3561'
KB: 3581'

CIBP @ 3677'

Perforations:
GRBG 3744'-56'

3766'-76'
3786'-94'
3800'-08'
3814'-30'

3838'-70'

7 7/8" HOLE

5-1/2", 15.5, 17#, CSG @ 3954'
CMT W/700
CIRC TO SURF W/71 SX

PBTD: 3677'
ORIGINAL PBTD: 3927'
TD: 3954'

WELL NAME: EMSU 237
 LOCATION: 2194' FSL & 640' FWL, SEC 3 T21S R36E
 FORMATION: GRBG
 SPUD DATE: 05/05/87
 IP:

COUNTY/STATE: LEA, NM
 LEASE: EUNICE MONUMENT
 CURRENT STATUS: TA'D
 COMPL DATE: 05/24/87
 API No: 30-025-29905




12 1/4" HOLE

8 5/8" 24# CSG @ 1295'
 CMT W/900 SX
 CIRC TO SURF W/190 SX

ELEV
 GL: 3561'
 KB: 3581'

CIBP @ 3677'

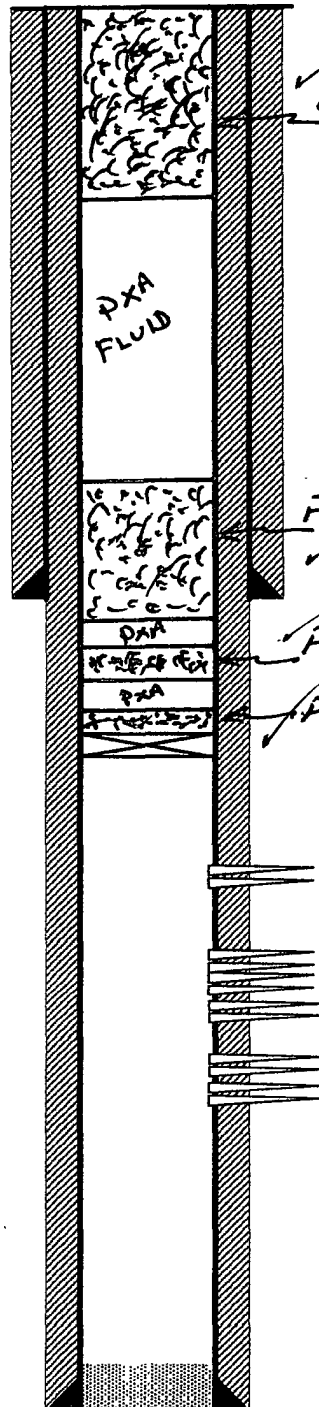

CIRC. 25 SXS. CMT. @ 200'-3'

Pump 45 SXS. CMT. @ 1500'-1172' - TAG

Pump 25 SXS. CMT. @ 2586'-2466' - TAG

Pump 25 SXS. CMT. @ 3677'-3477'

Perforations:
 GRBG 3744'-56'

3766'-76'

3786'-94'

3800'-08'

3814'-30'

3838'-70'

7 7/8" HOLE

5-1/2", 15.5, 17#, CSG @ 3954'
 CMT W/700
 CIRC TO SURF W/71 SX

PBD: 3677'
 ORIGINAL PBD: 3927'
 TD: 3954'

DAE 10/22/12