

District I (575) 393-6161
1625 N French Dr. Hobbs, NM 88240
District II - (575) 748-1283
811 S First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S St. Francis Dr., Santa Fe, NM 87505

Energy, Minerals and Natural Resources

Revised August 1, 2011

RECEIVED

OIL CONSERVATION DIVISION

NOV 05 2012

HOBBSUCD

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-09940
5. Indicate Type of Lease STATE ☒ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name ALICE PADDOCK
8. Well Number: 4
9. OGRID Number: 4323
10. Pool name or Wildcat BLINEBRY OIL & GAS (OIL)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3367' DF

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☒ Gas Well ☒ Other Water Injection

2. Name of Operator
Chevron USA INC.

3. Address of Operator
15 Smith Road Midland, TX 79705

4. Well Location

Unit Letter G : 1980' feet from the North line and 1980' feet from the East line
Section 1 Township 22-S Range 37-E NMPM County Lea

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

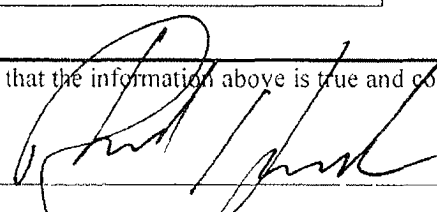
TD- 6300' PERFS - 5139' - 5197', 5640' - 5663' (OH)
13.375" 40# csg @ 298' w/500 sx, 17-1/4" hole, TOC: SURFACE
9-5/8" 36# csg @ 2955' w/1300 sx, 12-1/4" hole, TOC: 1730' - Temp Survey
7" 23# csg @ 5263' w/400 sx, 8-3/4" hole, TOC: 2965' - Temp Survey

- MIRUWSU, NDWH, NUBOP.
- Tag CIBP @ 4975' CAP w/255X.
- Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
- Spot 35 sx of C cement
- Perf & Sqz 75 sx of C cement @ 3005 - 2855', CTOC, WOC & TAG 2550'
- Perf & Sqz 50 sx of C cement @ 2425' - 2325', CTOC, WOC & TAG - Base of Salt
- Perf & Sqz 50 sx of C cement @ 1450 - 1050', CTOC, WOC & TAG - Top of Salt
- Perf & Circulate 245 sx of C cement @ 348' to Surface. 1300'
- Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location

Spud Date:


Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE Representative DATE 11/01/2012

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY:  TITLE Compliance Officer DATE 11-05-2012

Conditions of Approval (if any):

Oil Conservation Division - Hobbs office Must be Notified 24 hours prior to the beginning of Plugging Operations begin

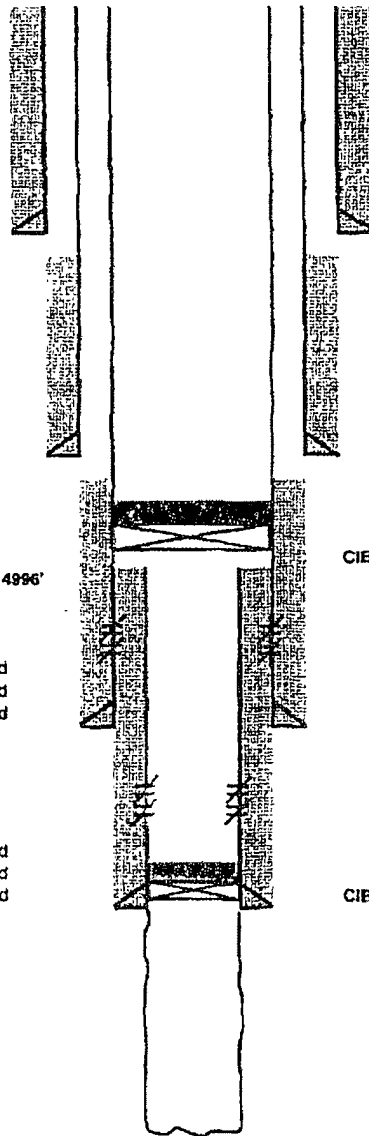
Well: Alice Paddock #4

Reservoir: Tubb Oil & Gas

Location:	
1980' FNL & 1980' FEL	
Section:	1
Township:	22S
Range:	37E
County:	LEA, NM.

Elevations:	
GL:	3358'
DF:	3367'
KB:	3368'

Wellbore Diagram



Well ID Info:	
Refno:	FB0957
API No:	30-025-08940
LS/L6:	UCU470500
Spud Date:	
Compl. Date:	

Surf. Csg:	
Size	13.375"
Weight	48# H40
Set @	298'
With:	500 sks
Hole Size:	17.25"
Circ:	Yes
TOC @	Surface
TOC By:	Circulation

Interm. Csg:	
Size	9 5/8"
Weight	36# H40
Set @	2955'
With:	1300 sks
Hole Size:	12-1/4"
Circ:	no
TOC @	1730'
TOC By:	Temp Survey

CIBP @ 4975 w/ 35' of cement

Prod. Csg:	
Size	7"
Weight	23# J-55
Set @	5263'
WNH:	450 sks
Hole Size:	8-3/4"
Circ:	No
TOC @	2965'
TOC By:	Temperature Survey

CIBP @ 5680 w/ 35' of cement

Liner:	
Size	4-1/2"
Weight	11.6# J-55
Set @	5710' w top @ 4996'
Hole Size:	6-1/4"
Circ:	Yes
TOC @	4996' (Top of Liner)
TOC By:	Circulated

Updated: 19-Dec-06
By: rjdg

Top of Liner @ 4996'

Paddock	
Perfs:	Status
5139-49'	Cmt Squeezed
5157-60'	Cmt Squeezed
5197-5227'	Cmt Squeezed

Blinabry	
Perfs:	Status
5640'	Cmt Squeezed
5661'	Cmt Squeezed
5683'	Cmt Squeezed

Tubb - Open Hole	
Perfs:	Status
5710'-6300'	Open Hole

TD: 6300'

Location:
1980' FNL & 1980' FEL
Section: 1
Township: 22S
Range: 37E
County: LEA, NM.

Well ID Info:	
Refno:	FB0957
API No:	30-025-08940
L5/L6:	UCU470500
Spud Date:	
Compl. Date:	

Elevations:	
GL:	3358'
DF:	3367'
KB:	3368'

Surf. Csg: Size 13.375" P.P. & Syz 50 sk
Weight 48# H40
Set: @ 298'
With: 500 sks of Cement @ 1150' -
Hole Size: 17.25"
Circ: Yes
TOC @ Surface 1050', C TOC, WDC 1746
TOC By: Circulation TOP & R SALT

Interm. Csg:		
Size	8 5/8"	
Weight	36# H40	Perf + Sqz 50 sk
Set: @	2955'	of Cement @ 2425' -
With:	1300 sks	2325', CTC
Hole Size:	12-1/4"	WOC & TAG
Circ:	no	BOTTOM OF SALT
TOC @	1730'	
TOC By:	Temp Survey	

Prod. Csg:	
Size	7"
Weight	23# J-55
Set @	5263'
With:	450 sks
Hole Size:	8-3/4"
Circ:	No
TOC @	2965'
TOC By:	Temperature Survey

Liner:

Size	4-1/2"
Weight	11.6# J-55
Set @	5710' w top @ 4996'
Hole Size:	6-1/4"
Circ:	Yes
TOC @	4996' (Top of Liner)
TOC By:	Circulated

Updated: 19-Dec-06
By: ndg

Paddock	
Perfs:	Status
5139-49'	Cmt Squeezed
5157-60'	Cmt Squeezed
5197-6227'	Cmt Squeezed

Perfs:	Status
5540'	Cmt Squeezed
5561'	Cmt Squeezed
5563'	Cmt Squeezed

Tubb - Open Hole
Perfs: **Status**
 5710'-6300' Open Hole

TP: 6300'