

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

RECEIVED

OIL CONSERVATION DIVISION

FEB 14 2013
1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBSUCD

WELL API NO. 30 025 23429
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name New Mexico DM State NCT 2
8. Well Number 1
9. OGRID Number 213190
10. Pool name or Wildcat Lazy J Penn

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator CrownQuest Operating, LLC	
3. Address of Operator Box 53310, Midland, TX 79710	
4. Well Location Unit Letter <u>E</u> : <u>1980</u> feet from the <u>North</u> line and <u>330</u> feet from the <u>West</u> line Section <u>21</u> Township <u>13S</u> Range <u>33E</u> NMPM Lea County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.): 4264' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ *AND A HAZARD*
CASING/CEMENT JOB ☐

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Plugging Proposal:

- 2B-2A Set 80 sx plug @ 9700' WOC, tag - 4 hrs. *Set 50 sx plug @ 6700'*
3. Set 80 sx plug from 4000-4200', WOC, tag - 4 hrs.
4. Set 70 sx 2700-2850, WOC.
5. Set 35 sx 1800-1900'
6. Set 120 sx 450-100', WOC - tag.
7. Set 20 sx from 60' to surface.

If CIBP is set above perforations from 9734-9740', will cap with 35/25 sx cement plug.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Ann Ritchie* TITLE Regulatory DATE 2/14/13

Type or print name Ann Ritchie E-mail address: ann.wtor@gmail.com PHONE: 432 6846381

For State Use Only

APPROVED BY: *[Signature]* TITLE *Dist MGR* DATE *2-14-2013*

Conditions of Approval (if any):


FEB 14 2013

Printed: 2/13/2013

New Mexico DM State NCT 2 # 1

Property#: 200760-01

API # 3002523429

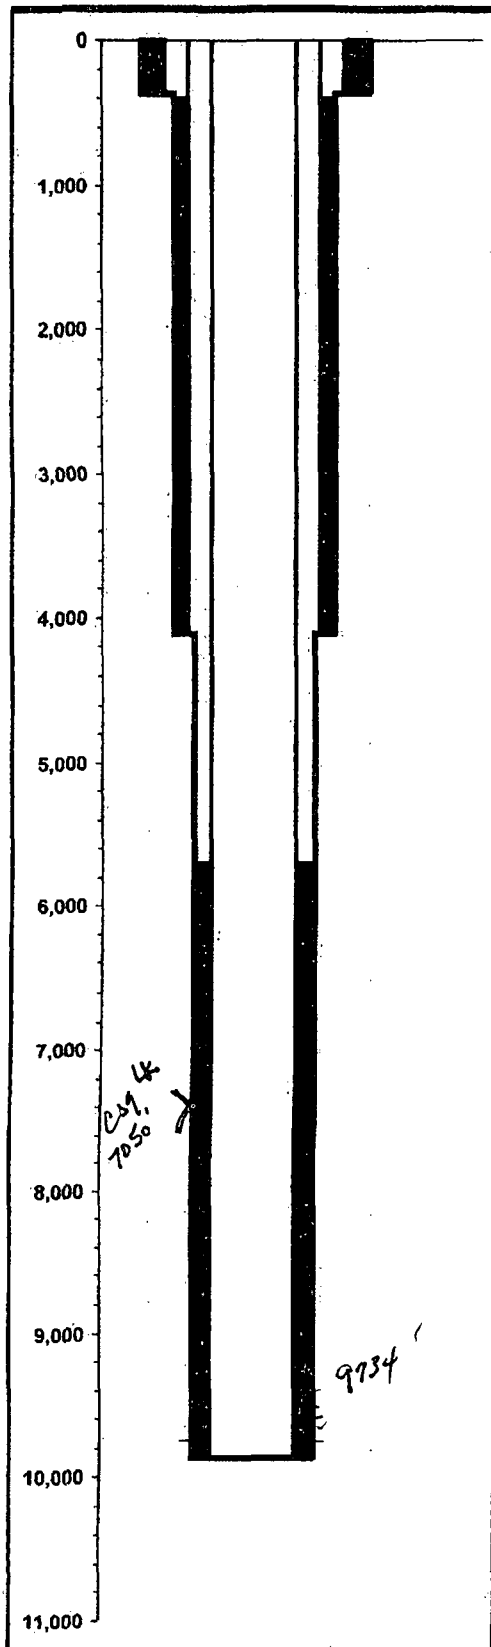

1980' FNL & 330' FWL	GL Elev.	4,265.00
Sec,Blk,Sur(Lbr.Lge,Sur)or(Sec,Twn,Rng): 21,,	Fill Depth:	
County, State: Lea, NM	PBTD:	9,803.00
Aux ID:	TD:	9,850.00
KB = : DF = : All Depths Corr To:	BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
15.0000	0.00	365.00	2/1/1970
10.6250	365.00	4,103.00	2/15/1970
7.8750	4,103.00	9,850.00	2/19/1970

Surface Casing

Date Ran: 2/1/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	10	11.7500	42.00	H40	365.00	0.00	365.00

Intermediate Casing

Date Ran: 2/15/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		8.6250	32.00	H40	4,103.00	0.00	4,103.00

(H-40 & J-55 and 24#, 28#, 32#)

Production Casing String 1

Date Ran: 2/19/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		5.5000	17.00	J55	9,850.00	0.00	9,850.00

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
250	C		11.750	15.000	0.00	365.00	Circ
865	C		8.625	10.625	396.00	4,103.00	Calc
800	C		5.500	7.875	5,693.00	9,850.00	Calc

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,734.00	9,740.00	PENN	A			2	14

(2 spf, 14 holes) 9734' - 9740'

Wellbore Schematic (From Surface to TD)


AFTER P&A PROCEDURE

Printed: 2/14/2013

New Mexico DM State NCT 2 # 1

Property#: 200760-01

API # 3002523429

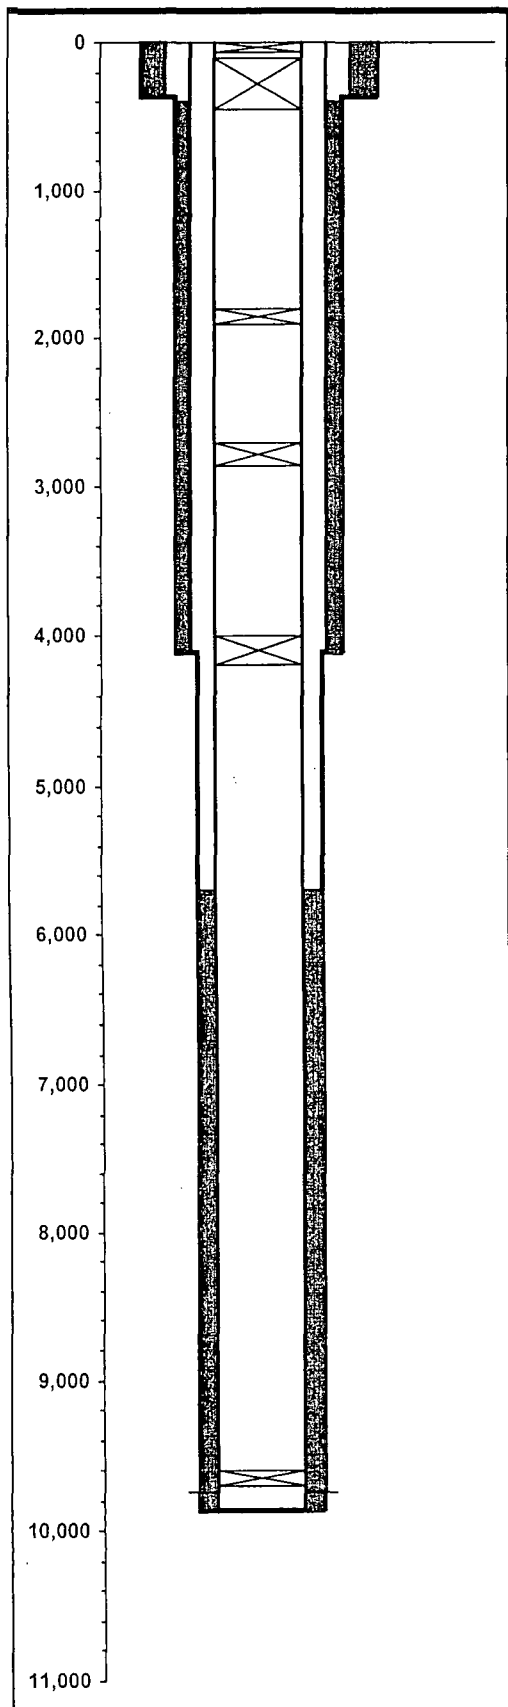

1980' FNL & 330' FWL	GL Elev:	4,265.00
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 21, ,	Fill Depth:	
County, State: Lea, NM	PBTD:	9,803.00
Aux ID:	TD:	9,850.00
KB = ; DF = ; All Depths Corr To:	BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
15.0000	0.00	365.00	2/1/1970
10.6250	365.00	4,103.00	2/15/1970
7.8750	4,103.00	9,850.00	2/19/1970

Surface Casing

Date Ran: 2/1/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	10	11.7500	42.00	H40	365.00	0.00	365.00

Intermediate Casing

Date Ran: 2/15/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		8.6250	32.00	H40	4,103.00	0.00	4,103.00
(H-40 & J-55 and 24#, 28#, 32#)							

Production Casing String 1

Date Ran: 2/19/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		5.5000	17.00	J55	9,850.00	0.00	9,850.00

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
250	C		11.750	15.000	0.00	365.00	Circ
865	C		8.625	10.625	396.00	4,103.00	Calc
800	C		5.500	7.875	5,693.00	9,850.00	Calc

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,734.00	9,740.00	PENN				2/13/2013	

Wellbore Plugs and Junk

Top	Bottom	Type	Diameter	Solid	Date
0.00	60.00	Cmt	5.500	Yes	2/13/2013
100.00	450.00	Cmt	5.500	Yes	2/13/2013
1,800.00	1,900.00	Cmt	5.500	Yes	2/13/2013
2,700.00	2,850.00	Cmt	5.500	Yes	2/13/2013
4,000.00	4,200.00	Cmt	5.500	Yes	2/13/2013
9,600.00	9,700.00	Cmt	5.500	Yes	2/13/2013