

HOBBS OCEAN

FEB 14 2013
RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-075-07740

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other Injection

2. Name of Operator

OXY USA WTP Limited Partnership

3. Address of Operator

P.O. Box 50250 Midland, TX 79710

4. Well Location

Unit Letter I : 3300 feet from the north line and 660 feet from the east lineSection 7 Township 20S Range 38E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3580'

7. Lease Name or Unit Agreement Name

Warren McKee Unit

8. Well Number 2019. OGRID Number 192463

10. Pool name or Wildcat

Warren McKee

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐TEMPORARILY ABANDON ☐PULL OR ALTER CASING ☐DOWNHOLE COMMINGLE ☐PLUG AND ABANDON ☒CHANGE PLANS ☐MULTIPLE COMPL ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐COMMENCE DRILLING OPNS. ☐CASING/CEMENT JOB ☐ALTERING CASING ☐P AND A ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-9397' PBD-5485' Perfs-9184-9310' CR-5520' CIBP-9124'

13-3/8" 54.5# csg @ 338' w/ 350sx, 17-1/2", TOC-Surf-Circ

8-5/8" 24-32# csg @ 3701' w/ 3365sx, 11" hole, TOC-Surf-Circ

5-1/2" 15.5-17# csg @ 9165' w/ 618sx, 7-7/8" hole, TOC-5596'-Calc

4" liner @ 9056-9395' w/ 50sx, TOC-9056'-Circ

1. RIH & tag Cmt/CR @ 5485'

2. Perf @ 5380', sqz 35sx cmt to 5280' WOC-Tag

3. M&P 25sx cmt @ 4549-4375' WOC-Tag

4. M&P 25sx cmt @ 3755-3580' WOC-Tag

5. M&P 25sx cmt @ 2790-2615' WOC-Tag

6. M&P 25sx cmt @ 1530-1355' WOC-Tag

4. Perf @ 388' sqz 130sx cmt to surface

10# MLF between plugs

Spud Date:

Rig Release D:

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

Regulatory Advisor

DATE

2/12/13

Type or print name

E-mail address: david.stewart@oxy.com

PHONE: 432-685-5717

For State Use Only

APPROVED BY:

TITLE

Compliance Officer

DATE

02-15-2013

Conditions of Approval (if any):

FEB 19 2013

OXY USA WTP LP - Proposed
Warren McKee Unit #201
API No. 30-025-07740

130sx @ 388'-Surface

25sx @ 1530-1355' WOC-Tag


25sx @ 2790-2615' WOC-Tag

25sx @ 3755-3580' WOC-Tag

25sx @ 4549-4375' WOC-Tag

35sx @ 5380-5280' WOC-Tag
PBTD-5485'
3/92-CR @ 5520'w/ 4 sx cmt, sqz 213sx cmt

3/92-CIBP @ 9124' w/ 35' cmt to 9089'

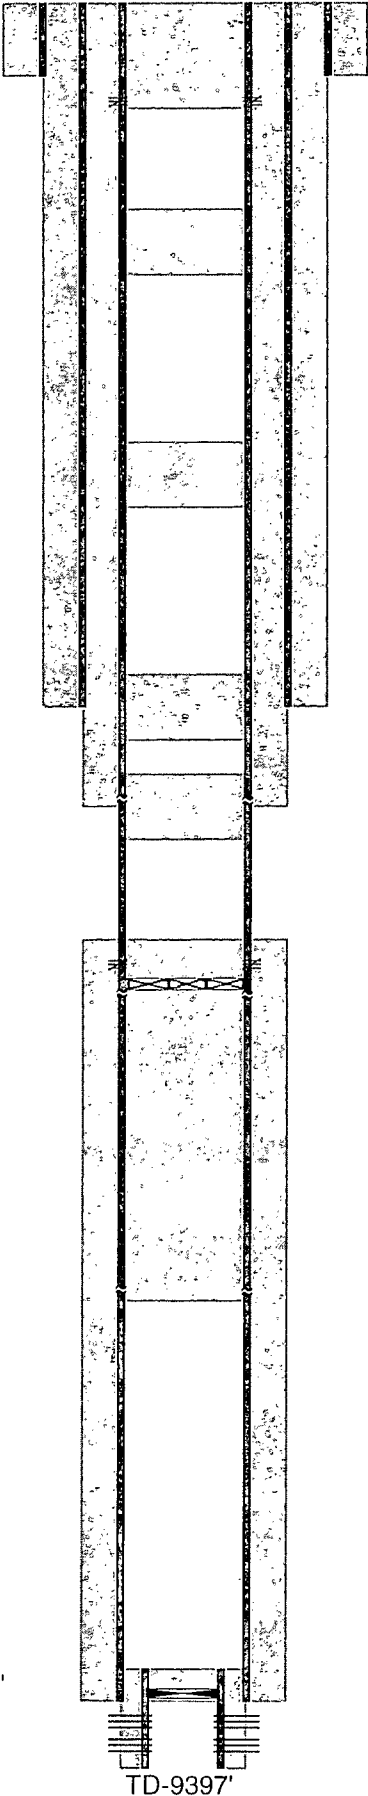

17-1/2" hole @ 345'
13-3/8" csg @ 338'
w/3350sx-TOC-Surf-Circ
Perf @ 388'

11" hole @ 3701'
8-5/8" csg @ 3701'
w/3365sx-TOC-Surf-Circ

1/62-Csg Lk @ 4499' sqz 550sx cmt to 545' TS

Perf @ 5380'
Csg Lk @ 5579-7192'

7-7/8" hole @ 9220'
5-1/2" csg @ 9165'
w/618sx-TOC-5596'-Calc

4-3/4" hole @ 9397'
4" liner @ 9056-9395'
w/50sx-TOC-9056'-Circ

Perfs @ 9184-9310'

TD-9397'

TD-9397

TD-9397