

Submit 1 Copy To Appropriate District Office  
 District I - (575) 393-6161  
 1625 N. French Dr., Hobbs, NM 88240  
 District II - (575) 748-1283  
 811 S. First St., Artesia, NM 88210  
 District III - (505) 334-6178  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV - (505) 476-3460  
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 Revised August 1, 2011

**MISDS OGD**  
**APR 12 2013**  
**RECEIVED**

**OIL CONSERVATION DIVISION**  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-21363
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator XTO ENERGY, INC.		6. State Oil & Gas Lease No.
3. Address of Operator 200 N. LORLAINE, SUITE 800, MIDLAND, TEXAS 79701		7. Lease Name or Unit Agreement Name BRIDGES STATE
4. Well Location Unit Letter <u>A</u> : <u>660</u> feet from the NORTH line and <u>500</u> feet from the EAST line Section <u>26</u> Township <u>17S</u> Range <u>34E</u> NMPM County <u>LEA</u>		8. Well Number <u>105</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4017' - GR		9. OGRID Number 005380
		10. Pool name or Wildcat VACUUM; GRAYBURG-SAN ANDRES

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<b>NOTICE OF INTENTION TO:</b> PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/>		<b>SUBSEQUENT REPORT OF:</b> REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- TAG EXISTING 4-1/2" CIBP + CMT. @ +/-4,155'; CIRC. WELL W/ PXA MUD. Test CSG.
- PUMP 25 SXS. CMT. @ 2,913'-2,793' (T/YATES X B/SALT); WOC X TAG CMT. PLUG.
- PUMP 25 SXS. CMT. @ 1,623'-1,466' (T/ANHY. X 8-5/8" CSG.SHOE); WOC X TAG CMT. PLUG.
- MIX X CIRC. TO SURF. ~~10 SXS. CMT. @ 100' 3'.~~ @ 300'.
- DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE David A. Eyer TITLE: AGENT DATE: 04/11/13

Type or print name: DAVID A. EYLER E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033

**For State Use Only**  
 APPROVED BY: Mark Whitaker TITLE: Compliance Officer DATE: 04-12-2013  
 Conditions of Approval (if any):


**Bridges State Unit #105**  
 Vacuum Greyburg S.A. Field  
 Lea County, NM

Elevation  
 GL- 4017'  
 KB- 4027'

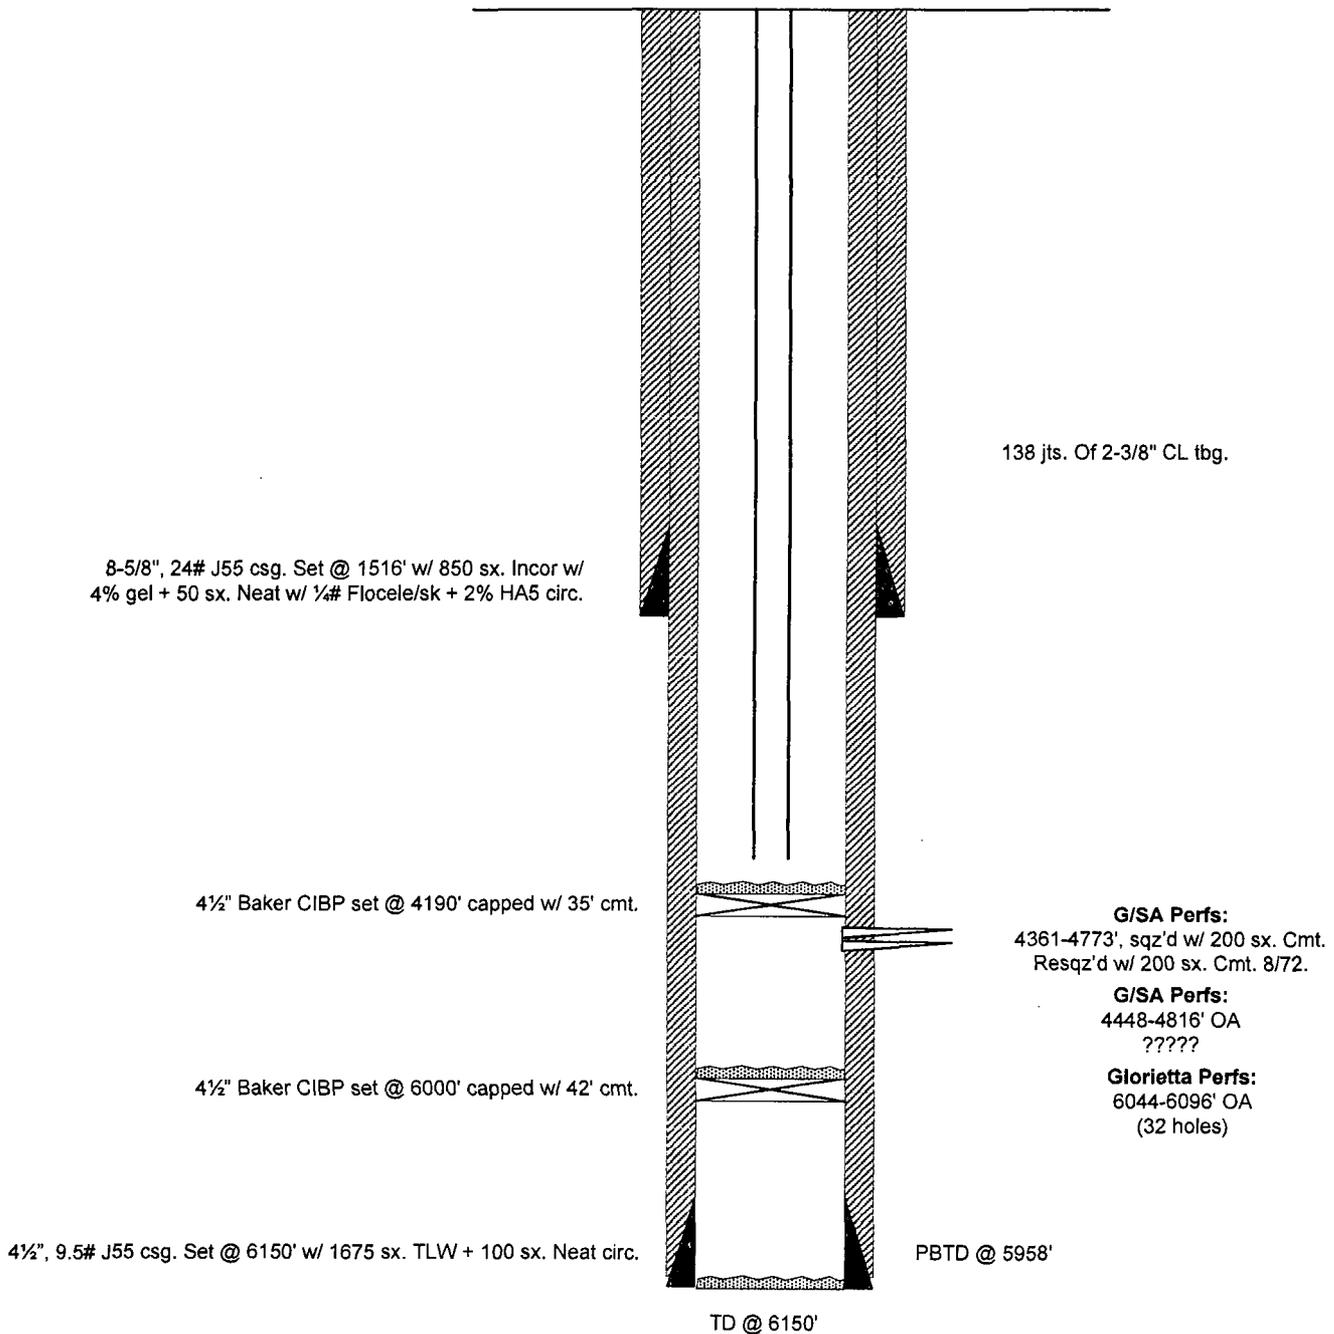

**Bridges State Unit #105**  
 Vacuum Greyburg S.A. Field  
 Lea County, NM

Elevation  
 GL- 4017'  
 KB- 4027'

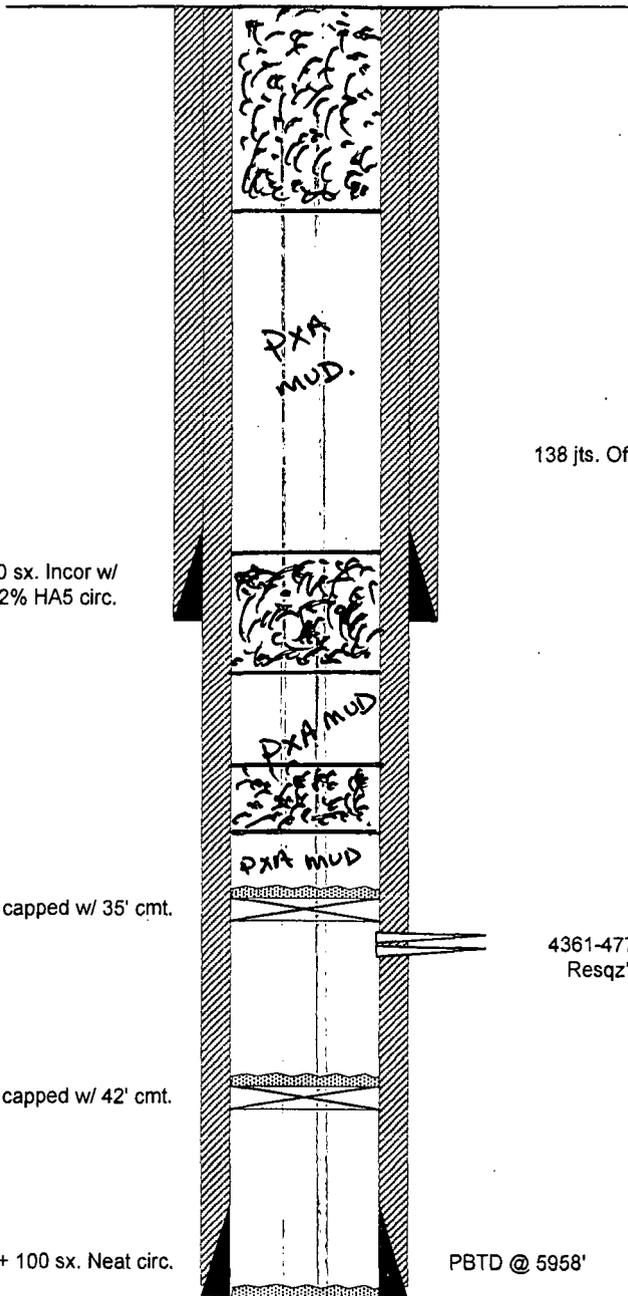

138 jts. Of 2-3/8" CL tbg.

8-5/8", 24# J55 csg. Set @ 1516' w/ 850 sx. Incon w/  
 4% gel + 50 sx. Neat w/ 1/4# Flocele/sk + 2% HA5 circ.

4 1/2" Baker CIBP set @ 4190' capped w/ 35' cmt.

4 1/2" Baker CIBP set @ 6000' capped w/ 42' cmt.

**G/SA Perfs:**  
 4361-4773', sqz'd w/ 200 sx. Cmt.  
 Resqz'd w/ 200 sx. Cmt. 8/72.

**G/SA Perfs:**  
 4448-4816' OA  
 ?????

**Glorietta Perfs:**  
 6044-6096' OA  
 (32 holes)

4 1/2", 9.5# J55 csg. Set @ 6150' w/ 1675 sx. TLW + 100 sx. Neat circ.

PBTD @ 5958'

TD @ 6150'