

Submit 1 Copy To Appropriate District Office  
 District I - (575) 393-6161  
 1625 N. French Dr., Hobbs, NM 88240  
 District II - (575) 748-1283  
 811 S. First St., Artesia, NM 88210  
 District III - (505) 334-6178  
 1000 Rio Brazos Rd., Aztec, NM 87424  
 District IV - (505) 476-3460  
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 Revised August 1, 2011

HOBBS OCD

OIL CONSERVATION DIVISION

MAY 20 2013

1220 South St. Francis Dr.  
 Santa Fe, NM 87505

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		7. Lease Name or Unit Agreement Name L.W. White WCT-B TRA
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		8. Well Number 1
2. Name of Operator OXY USA Inc.		9. OGRID Number 16696
3. Address of Operator P.O. Box 50250 Midland, TX 79710		10. Pool name or Wildcat Eumont Yates TR Qu(Oil)
4. Well Location Unit Letter <u>P</u> : <u>660</u> feet from the <u>south</u> line and <u>660</u> feet from the <u>east</u> line Section <u>35</u> Township <u>20S</u> Range <u>36E</u> NMPM County <u>Lea</u>		
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>3556</u>		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK  PLUG AND ABANDON   
 TEMPORARILY ABANDON  CHANGE PLANS   
 PULL OR ALTER CASING  MULTIPLE COMPL   
 DOWNHOLE COMMINGLE

SUBSEQUENT REPORT OF:

- REMEDIAL WORK  ALTERING CASING   
 COMMENCE DRILLING OPNS.  P AND A   
 CASING/CEMENT JOB

OTHER:

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-3860' OH-3700-3860'  
 10-3/4" 32.75# csg @ 255' w/ 200sx, 13-3/4" hole, TOC-Surf-Calc  
 7-5/8" 26.4# csg @ 1318' w/ 250sx, 9-7/8" hole, TOC-Surf-Calc  
 5-1/2" 17# csg @ 3700' w/ 175sx, 6-3/4" hole, TOC-1950'-Calc  
 1. RIH & set CIBP @ 3650' M&P 25sx cmt  
 2. M&P 35sx cmt @ 3200-2950' WOC-Tag  
 3. M&P 25sx cmt @ 2640-2490' WOC-Tag  
 4. Perf @ 1390', sqz 35sx cmt to 1265' WOC-Tag  
 5. Perf @ 305' sqz 80sx cmt to surface  
 Circ 10# MLF between plugs

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 5/13/13


Type or print name David Stewart E-mail address: david.stewart@oxy.com PHONE: 432-685-5717  
**For State Use Only**

APPROVED BY: [Signature] TITLE Dist. MGR DATE 5-20-2013  
 Conditions of Approval (if any):

Oil Conservation Division - Hobbs office: **Must be Notified 24 hours prior to the beginning of Plugging Operations begin.**

MAY 21 2013

OXY USA Inc. - Current  
L.W. White NCT-B Tr A #1  
API No. 30-025-04409

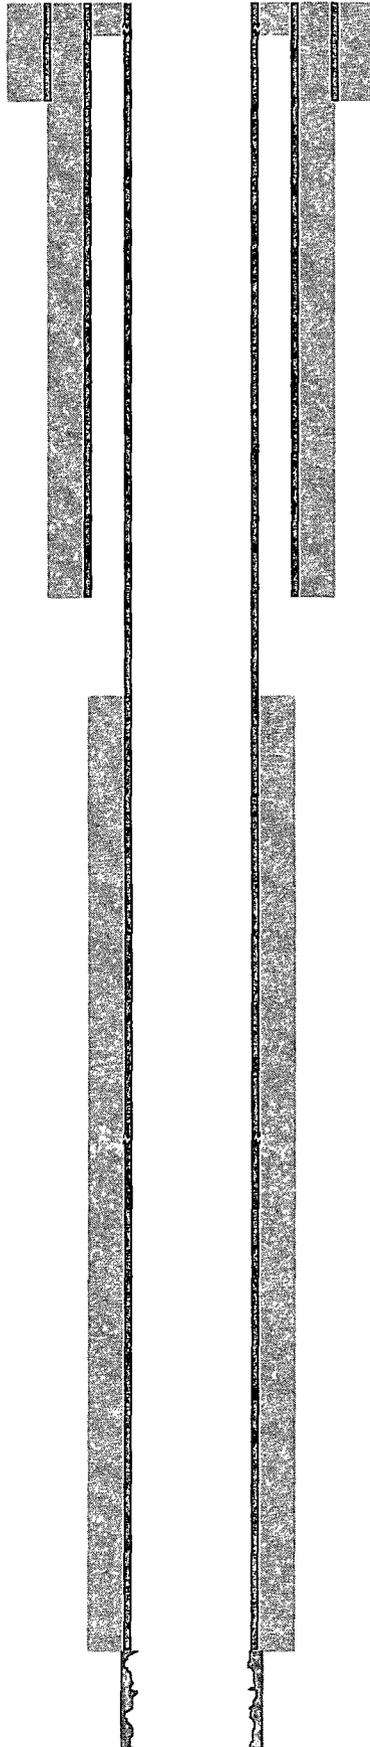

13-3/4" hole @ 255'  
10-3/4" csg @ 255'  
w/ 200sx-TOC-Surf-Calc  
Csg Lk @ 117' sqz w/ 25sx, circ surf

9-7/8" hole @ 1318'  
7-5/8" csg @ 1318'  
w/ 250sx-TOC-Surf-Calc

Csg Lk @ 2538-2570' sqz w/ 250sx


6-3/4" hole @ 3860'  
5-1/2" csg @ 3700'  
w/ 175sx-TOC-1950'-Calc

OH @ 3700-3860'

TD-3860'

OXY USA Inc. - Proposed  
L.W. White NCT-B Tr A #1  
API No. 30-025-04409

80sx @ 305'-Surface

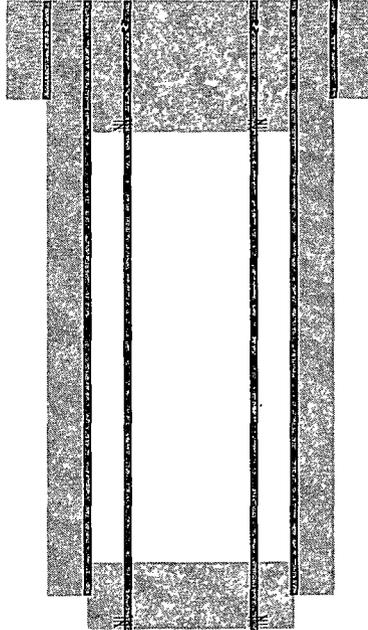

13-3/4" hole @ 255'  
10-3/4" csg @ 255'  
w/ 200sx-TOC-Surf-Calc  
Csg Lk @ 117' sqz w/ 25sx, circ surf  
**Perf @ 305'**

35sx @ 1390-1265' WOC-Tag

**Perf @ 1390'**

9-7/8" hole @ 1318'  
7-5/8" csg @ 1318'  
w/ 250sx-TOC-Surf-Calc

25sx @ 2640-2490' WOC-Tag

✓ Csg Lk @ 2538-2570' sqz w/ 250sx

35sx @ 3200-2950' WOC-Tag

CIBP @ 3650' w/ 25sx cmt

6-3/4" hole @ 3860'  
5-1/2" csg @ 3700'  
w/ 175sx-TOC-1950'-Calc

OH @ 3700-3860'

TD-3860'