

HOBBS OCD

NOV 27 2013

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-25445

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

COOPER, S.R. "A"

8. Well Number

002

9. OGRID Number

162683

10. Pool name or Wildcat

JALMAT; SEVEN RIVERS

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator

600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location

Unit Letter O : 330 feet from the SOUTH line and 2310 feet from the EAST line
 Section 14 Township 24S Range 36E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3,340' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A
 CASING/CEMENT JOB ☐

OTHER: ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 5-1/2" CIBP @ 3,050'; PUMP 55 SXS. CMT. @ 3,050'-2,690' (T/YATES, B/SALT); WOC X TAG CMT. PLUG.
- 2) CIRC. WELL W/ PXA FLUID; PRES. TEST 5-1/2" CSG. TO 750# 1345'
- 3) PERF. X ATTEMPT TO SQZ. 90 SXS. CMT. @ 1,295'-1,176' (T/SALT, 8-5/8" CSG. SHOE, T/ANYH.); WOC X TAG.
- 4) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, 45 SXS. CMT. @ 100-3 200'
- 5) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE:

AGENT

DATE: 11/23/13

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM

PHONE: 432.687.3033

For State Use Only

APPROVED BY:

TITLE

Compliance Officer

DATE

12-2-2013

OIL CONSERVATION DIVISION - Hobbs office **Must Be Notified**
 24 hours prior to the beginning of Plugging Operations.


DEC 02 2013



13-3/8" 48# Conductor @ 37"
Original Operator: Texas Pacific Oil Co.

8 5/8" 24# csg @ 1237'
Cmt'd w/650 sxs "C", circl'd cmt

Cement top unknown

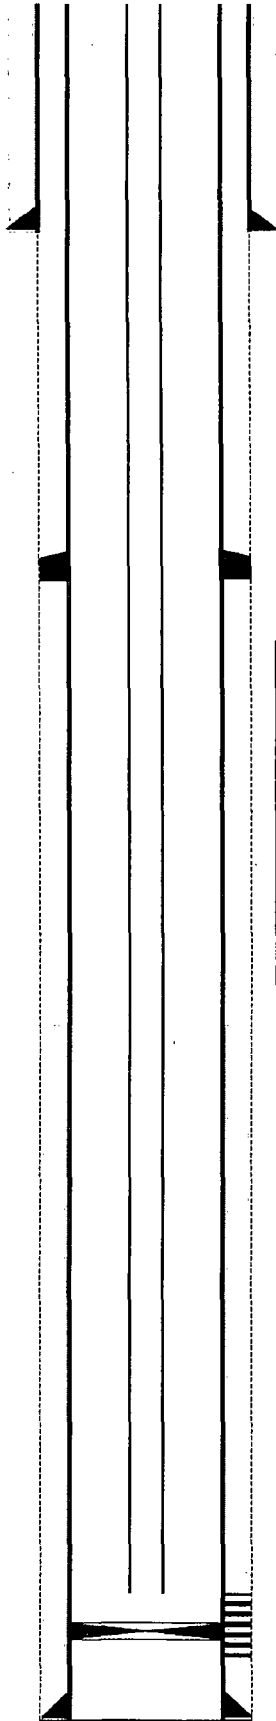

TD: 3238'

Cimarex Energy Co. of Colorado

S R Cooper "A" #2

330' FSL & 2310' FEL

Sec. 14, T-24-S, R-36-E, Lea Co., NM

API #: 30-025-25445

GL: 3340'

KB: 3350' (10' AGL)

J Piwetz

11/19/2013

NOTE: INCOMPLETE DATA FROM NMOCD FILES

DV Tool @ unreported depth

Run 7/6/1998

Quantity	Description	Length	Setting Depth
95	2-3/8" J-55 EUE 8rd	2983.00	2993.00
1	2-3/8" tubing sub	8.00	3001.00
4	Pump	32.80	3033.80
1	2-3/8" SN	1.10	3034.90
1	2-3/8" X 5-1/2" TAC	3.20	3038.10
ROD DETAIL			
1	1-1/4" X 16' PR	16.00	
4	1" Pony Rods (2'-4'-6'-8')	20.00	
118	1" Rods	2950.00	
1	Rotor	30.00	

7 Rivers Perfs: 3113 - 3166' (23 holes)

CIBP @ 3152' (May or may not be present)

5-1/2" 15.5# K-55 Casing @ 3238'


Cmt set inside casing, drilled out, TOC unknown



13-3/8" 48# Conductor @ 37"
Original Operator: Texas Pacific Oil Co.

8 5/8" 24# csg @ 1237'
Cmt'd w/650 sxs "C", circl'd cmt

Cement top unknown

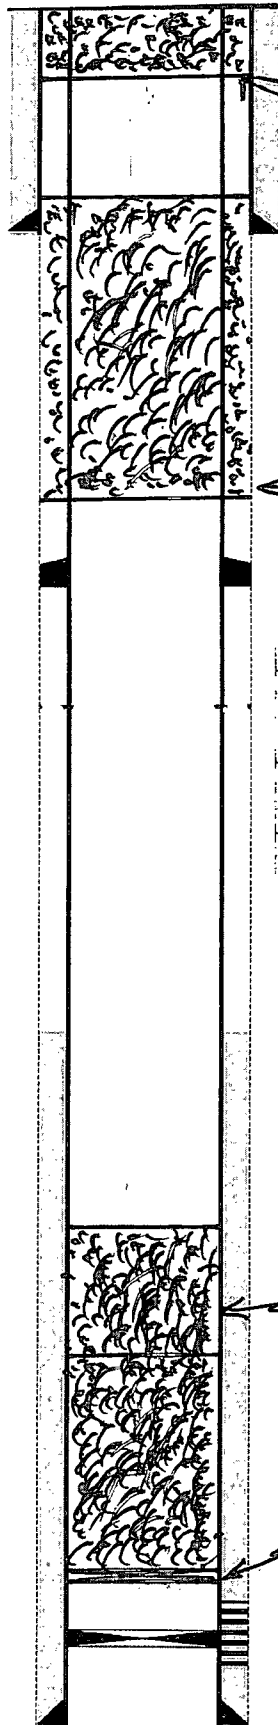

TD: 3238'

Cimarex Energy Co. of Colorado

S R Cooper "A" #2

330' FSL & 2310' FEL

Sec. 14, T-24-S, R-36-E, Lea Co., NM

API #: 30-025-25445

GL: 3340'

KB: 3350' (10' AGL)

J Piwetz

11/19/2013

PERF. x CIRC. 45 sxs. cmt. @ 100'-3'

NOTE: INCOMPLETE DATA FROM NMOCDF FILES

PERF. x SQZ. 90 sxs. cmt. @ 1395'-1176'-TAG

Pump 55 sxs. cmt. @ 3050'-2690'-TAG

SET 5 1/2" CIBP @ 3050'

7 Rivers Perfs: 3113 - 3166' (23 holes)

CIBP @ 3152' (May or may not be present)

5-1/2" 15.5# K-55 Casing @ 3238'

Cmt set inside casing, drilled out, TOC unknown

DAE 11/22/13