

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
HOBBS OCD 1220 South St. Francis Dr.
Santa Fe, NM 87505

MAR 10 2014

WELL API NO. 30-025-06132
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 770430
7. Lease Name or Unit Agreement Name STATE I
8. Well Number 1
9. OGRID Number 17081
10. Pool name or Wildcat EUNICE MONUMENT GSA
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSING TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐
2. Name of Operator FULFER OIL + CATTLE LLC.
3. Address of Operator LEA ENERGY SERVICES, LLC.
4. Well Location Unit Letter N : 330 feet from the SOUTH line and 1650 feet from the WEST line Section 16 Township 20S Range 37E NMPM County LEA
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☒	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
DOWNHOLE COMMINGLE ☐	CASING/CEMENT JOB ☐
CLOSED-LOOP SYSTEM ☐	P AND A ☐
OTHER: ☐	OTHER: TA ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- ① RU KILL TRUCK + CHART RECORDER
- ② LOAD 7" CSG. W/INERT FLUID
- ③ PRESSURE CSG. ANNULAS TO 500[#] F/30 MIN. 3/06/14
- ④ IF CSG. HOLDS REQUEST TA STATUS.

CIBP W/35' CEMENT - 3637' TOP PERF - 3722'

Spud Date:

1-17-74

Rig Release Date:

1-31-74

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Gary W. Wink TITLE PRODUCTION FOREMAN DATE 3/5/14


Type or print name GARY W. WINK E-mail address: garywink@leaenergy PHONE: 575-390-5095

APPROVED BY: Mark Brown TITLE Compliance Officer DATE 3/12/2014

Conditions of Approval (if any):

MAR 22 2014

This Approval of Temporary Abandonment Expires 3/6/2015 1 YEAR

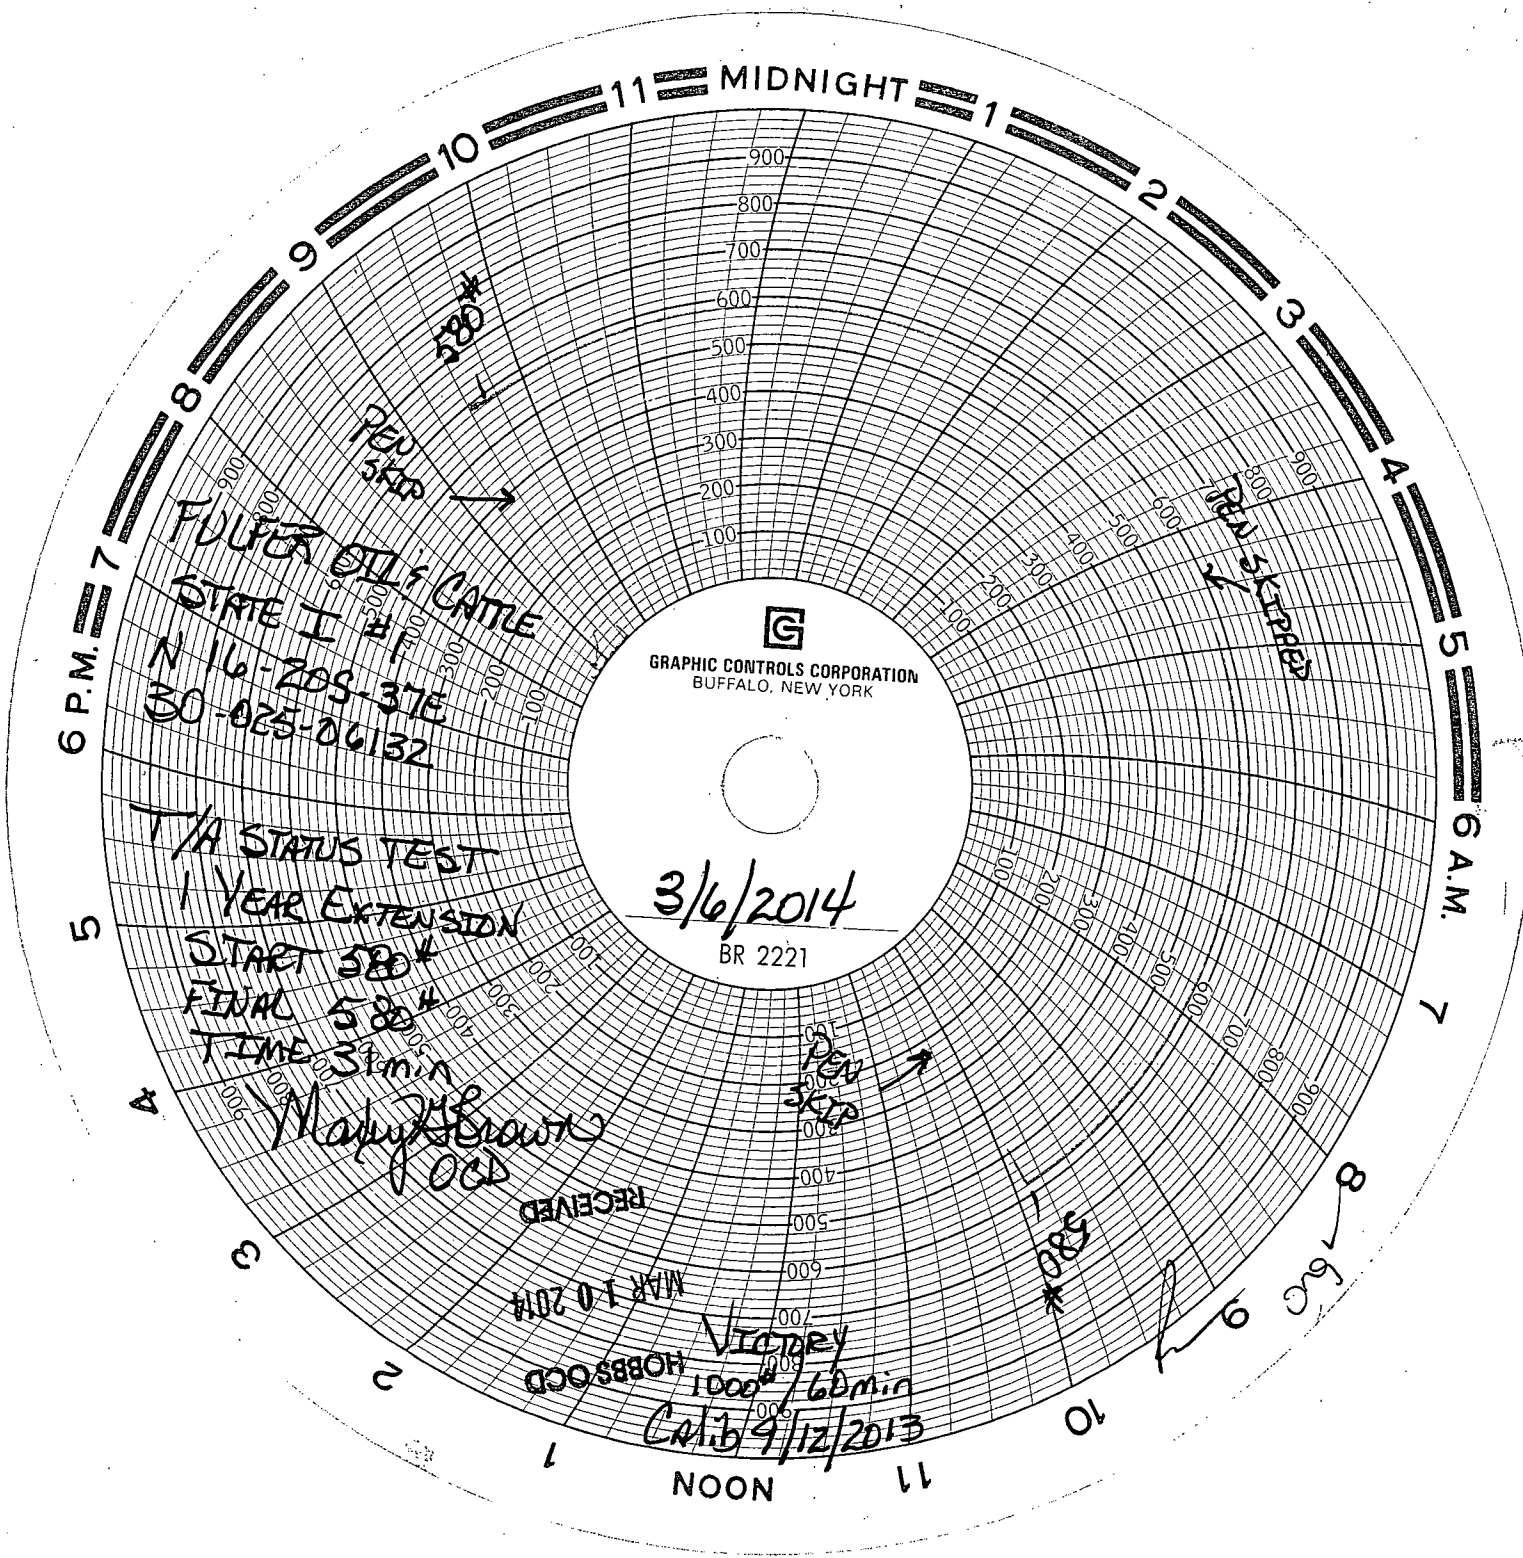

GRAPHIC CONTROLS CORPORATION
BUFFALO, NEW YORK

3/6/2014

BR 2221

FULLER OIL CATTLE
STATE I #1
N 16-20S-37E
30-025-06132

T/A STATUS TEST
1 YEAR EXTENSION
START 580*
FINAL 580*
TIME 31min

Wally Brown
OCD

RECEIVED
MAR 10 2014

VICTORY
HOBBS OGD
1000' / 60min
Calib 9/12/2013

REN SKIPPED

580*

PLUGGING & ABANDONMENT WORKSHEET (3 STRING CSNG)OPERATOR FULFER OIL & CATTLELEASENAME STATE IWELL # 1SECT 16 TWN 20S RNG 37EFROM 330' NSL 1650' EMLTD: 3850'FORMATION @ TD EM/GRSAPBTD: 3700'FORMATION @ PBTD 1

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	13"	231	CIRC.	
INTMED 1	9 5/8"	1170	CIRC.	
INTMED 2	7"	3749	1389'	
PROD				
	SIZE	TOP	BOT	TOC DETERMINED BY
LINER 1				
LINER 2				
	CUT & PULL @		TOP - BOTTOM	
INTMED 1		PERFS	3722' - 3746'	
INTMED 2		OPENHOLE		
PROD				

* REQUIRED PLUGS DISTRICT 1

RUTLER (AMTID)	
YAZEE	
QUEEN	3255'
GRAYBIRD	3555'
SAN ANDREAS	
CARTER REEF	
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BURNEY CANYON	
SOME SPRING	
GLORITA	5019'
FAADOCK	5103'
TURS	
ORNGARD	
ABO	
WC	
FERN	
STRAWN	
ATOKA	
MORROW	
ROSS	
DEVONIAN	

PLUG	TYPE	SACKS	DEPTH
PLUG	PLUG	CMNT	
EXAMPLE 1			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700-8800'
PLUG #3	CIRP/35'		5300'
PLUG #4	CIRP	25 SXS	5300'
PLUG #5	STUB	50 SXS	4600-4700'
PLUG #6	REINFR SOZ	200 SXS	400'
PLUG #7	SIRP	10 SXS	0-10'
PLUG #8			
PLUG #9			
PLUG #10			
PLUG #11			
PLUG #12			
PLUG #13			
PLUG #14			
PLUG #15			
PLUG #16			
PLUG #17			
PLUG #18			
PLUG #19			
PLUG #20			

13" CSB.
@ 231'
TOC CIRC.
225 SX

9 5/8"
@ 1170'
TOC CIRC.
525 SX

CIRP SET @ 3737'

PERFS -
3722' - 3746'

7" CSB.
@ 3749'
TOC 1389'
350 SX

PBTA - 3700'
TD 3850'

DUMPED 25X
CMT