

Results of Directional Survey

API number:	30-025-41308		
OGRID:		Operator:	EOG RESOURCES INC
		Property:	DILLON 31 # 1H

surface	ULSTR:	O	31	T 24S	R 34E
				220 FSL	1815 FEL

BH Loc	ULSTR:	B	31	T 24S	R 34E
14132	MD	9467.8	TVD	241 FNL	2295 FEL
				5039 FSL	

Top Perf/OH	ULSTR:	O	31	T 24S	R 34E
9650	MD	9453.5	TVD	577 FSL	2094 FEL

Bot Perf/OH	ULSTR:	B	31	T 24S	R 34E
13990	MD	9466.6	TVD	383 FNL	2297 FEL
				4897 FSL	

	MD	N/S	E/W	VD
	9642	349.31	-276.95	9451.99
TOP PERFS/OH	9650	356.87	-279.10	9453.48
	9674	379.54	-285.56	9457.96
	13967	4654.36	-482.35	9466.25
BOT PERFS/OH	13990	4677.36	-482.01	9466.57
	14062	4749.34	-480.94	9467.57

NEXT TO LAST	14706	4763.34	-480.73	9467.63
LAST READING	14132	4819.34	-479.95	9467.83
TD	14132	4819.34	-479.95	9467.83

Surface Location	220	FS	1815	FE
Projected BHL	5039	FS	2295	FE
Location of				
Top Perfs/OH	577	FS	2094	FE
Bottom Perfs/OH	4897	FS	2297	FE

SUMMARY of Subsurface Locations

Surface Location	O-31-24S-34E	220	FS	1815	FE	Vert. Depth
Top Perfs/OH	O-31-24S-34E	577	FS	2094	FE	9453.48
Bottom Perfs/OH	B-31-24S-34E	4897	FS	2297	FE	9466.57
Projected TD	B-31-24S-34E	5039	FS	2295	FE	9467.83

APR 14 2014



EOG Resources

Lea County, NM (NAD27 NME)

Dillon 31

#1H

WB1/Job #1311413

HOBBS OCD

MAR 17 2014

RECEIVED

Survey: Pheonix MWD Survey

Phoenix Final Survey Report

07 November, 2013





Phoenix Technology Services

Phoenix Final Survey Report



Company:	EOG Resources	Local Co-ordinate Reference:	Well #1H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB @ 3467.00usft (Patterson 452)
Site:	Dillon 31	MD Reference:	KB @ 3467.00usft (Patterson 452)
Well:	#1H	North Reference:	Grid
Wellbore:	WB1/Job #1311413	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Patterson 452)	Database:	GCR DB

Project:	Lea County, NM (NAD27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Dillon 31		
Site Position:		Northing:	425,560.00 usft
From:	Map	Easting:	756,057.00 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16"
		Latitude:	32° 10' 2.19023 N
		Longitude:	103° 30' 21.00814 W
		Grid Convergence:	0.44 °

Well:	#1H		
Well Position	+N/-S	0.00 usft	Northing:
	+E/-W	0.00 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
		Latitude:	32° 10' 2.19023 N
		Longitude:	103° 30' 21.00814 W
		Ground Level:	3,440.00 usft

Wellbore:	WB1/Job #1311413				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2010_14	10/21/13	7.26	60.09	48,354

Design:	Surveys (Patterson 452)			
Audit Notes:				
Version:	1.0	Phase:	ACTUAL	Tie On Depth:
				0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.00	0.00	0.00	354.21

Survey Program	Date 11/07/13				
From	To	Survey (Wellbore)	Tool Name	Description	
(usft)	(usft)				
186.00	14,132.00	Phoenix MWD Survey (WB1/Job #131141)	MWD	MWD - Standard	

Survey	MD	Inc	Azi (azimuth)	TVD	N/S	E/W	V. Sec	DLeg
	(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(°/100usft)
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	186.00	0.80	183.50	185.99	-1.30	-0.08	-1.28	0.43
First Phoenix MWD Survey								
	275.00	0.60	165.30	274.99	-2.37	0.00	-2.36	0.33
	366.00	1.00	202.60	365.98	-3.56	-0.18	-3.52	0.70
	458.00	1.10	217.40	457.96	-5.00	-1.03	-4.87	0.31
	551.00	1.10	214.50	550.95	-6.45	-2.08	-6.21	0.06
	613.00	1.20	204.60	612.93	-7.53	-2.68	-7.22	0.36
	705.00	1.10	214.90	704.92	-9.13	-3.59	-8.72	0.25
	797.00	1.10	208.80	796.90	-10.63	-4.52	-10.12	0.13
	889.00	1.60	239.50	888.87	-12.05	-6.05	-11.38	0.94
	981.00	1.70	242.60	980.84	-13.33	-8.37	-12.42	0.15



Phoenix Technology Services

Phoenix Final Survey Report



Company:	EOG Resources	Local Co-ordinate Reference:	Well #1H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB @ 3467.00usft (Patterson 452)
Site:	Dillon 31	MD Reference:	KB @ 3467.00usft (Patterson 452)
Well:	#1H	North Reference:	Grid
Wellbore:	WB1/Job #1311413	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Patterson 452)	Database:	GCR DB

Survey							
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V.Sec (usft)	DLeg (°/100usft)
1,073.00	1.60	268.70	1,072.80	-13.99	-10.87	-12.82	0.82
1,127.00	1.30	281.10	1,126.78	-13.89	-12.22	-12.59	0.80
1,213.00	1.20	281.80	1,212.76	-13.52	-14.06	-12.03	0.12
1,267.00	1.20	280.00	1,266.75	-13.30	-15.17	-11.71	0.07
1,359.00	1.20	273.80	1,358.73	-13.07	-17.08	-11.28	0.14
1,451.00	1.10	275.20	1,450.71	-12.93	-18.92	-10.95	0.11
1,546.00	0.90	278.90	1,545.70	-12.73	-20.57	-10.59	0.22
1,642.00	0.90	281.20	1,641.68	-12.47	-22.05	-10.18	0.04
1,737.00	0.90	277.50	1,736.67	-12.23	-23.52	-9.79	0.06
1,833.00	0.70	279.70	1,832.66	-12.03	-24.85	-9.46	0.21
1,928.00	1.80	289.70	1,927.64	-11.43	-26.82	-8.66	1.18
2,024.00	2.20	291.30	2,023.58	-10.25	-29.96	-7.17	0.42
2,119.00	1.80	288.90	2,118.52	-9.10	-33.07	-5.72	0.43
2,214.00	1.60	284.40	2,213.48	-8.29	-35.77	-4.64	0.25
2,310.00	1.40	292.60	2,309.45	-7.51	-38.15	-3.62	0.31
2,405.00	1.50	294.50	2,404.42	-6.55	-40.35	-2.44	0.12
2,501.00	1.30	298.80	2,500.39	-5.50	-42.45	-1.19	0.24
2,692.00	0.80	302.50	2,691.36	-3.74	-45.47	0.87	0.26
2,883.00	1.60	292.60	2,882.31	-2.00	-49.06	2.96	0.43
3,074.00	0.90	305.60	3,073.27	-0.10	-52.74	5.22	0.39
3,265.00	1.50	296.50	3,264.22	1.89	-56.20	7.55	0.33
3,456.00	0.60	320.70	3,455.19	3.78	-59.07	9.72	0.52
3,646.00	1.50	291.70	3,645.16	5.47	-62.01	11.69	0.54
3,837.00	1.50	297.20	3,836.09	7.53	-66.55	14.21	0.08
4,028.00	1.50	308.60	4,027.03	10.24	-70.73	17.32	0.16
4,219.00	0.40	355.00	4,218.00	12.46	-72.74	19.74	0.66
4,409.00	0.80	86.60	4,407.99	13.20	-71.48	20.34	0.48
4,600.00	1.10	143.80	4,598.97	11.80	-69.06	18.71	0.50
4,791.00	1.70	178.30	4,789.92	7.49	-67.90	14.30	0.53
4,982.00	1.60	208.70	4,980.84	2.32	-69.09	9.28	0.46
5,085.00	1.50	243.60	5,083.80	0.46	-70.99	7.62	0.91
5,256.00	1.20	244.80	5,254.76	-1.30	-74.62	6.23	0.18
5,447.00	1.30	243.10	5,445.71	-3.13	-78.36	4.79	0.06
5,638.00	1.50	253.60	5,636.65	-4.82	-82.69	3.55	0.17
5,829.00	1.50	255.60	5,827.59	-6.15	-87.51	2.71	0.03
6,020.00	1.40	261.20	6,018.53	-7.13	-92.23	2.22	0.09
6,211.00	1.60	267.80	6,209.46	-7.58	-97.21	2.26	0.14
6,402.00	1.80	241.00	6,400.38	-9.14	-102.49	1.25	0.42
6,593.00	1.90	239.80	6,591.28	-12.19	-107.85	-1.25	0.06
6,784.00	2.20	235.70	6,782.16	-15.85	-113.62	-4.30	0.17
6,974.00	1.80	285.70	6,972.06	-17.09	-119.50	-4.95	0.91
7,165.00	1.50	264.30	7,162.98	-16.53	-124.88	-3.85	0.36
7,356.00	1.60	257.00	7,353.91	-17.38	-129.97	-4.18	0.12
7,547.00	1.50	260.20	7,544.84	-18.40	-135.03	-4.69	0.07

Company:	EOG Resources	Local Co-ordinate Reference:	Well #1H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB @ 3467.00usft (Patterson 452)
Site:	Dillon 31	MD Reference:	KB @ 3467.00usft (Patterson 452)
Well:	#1H	North Reference:	Grid
Wellbore:	WB1/Job #1311413	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Patterson 452)	Database:	GCR DB

Survey							
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)
7,738.00	1.80	268.60	7,735.76	-18.90	-140.49	-4.63	0.20
7,929.00	1.60	251.30	7,926.68	-19.83	-146.01	-5.00	0.29
8,120.00	1.70	246.40	8,117.60	-21.82	-151.14	-6.46	0.09
8,311.00	2.00	235.70	8,308.50	-24.83	-156.49	-8.92	0.24
8,502.00	1.70	232.40	8,499.40	-28.44	-161.48	-12.00	0.17
8,693.00	1.50	227.10	8,690.33	-31.87	-165.56	-15.01	0.13
8,884.00	1.50	279.10	8,881.27	-33.18	-169.86	-15.87	0.69
8,898.00	1.50	281.40	8,895.26	-33.11	-170.22	-15.77	0.43
8,973.00	3.10	325.60	8,970.21	-31.24	-172.33	-13.70	3.04
9,005.00	5.90	340.20	9,002.10	-28.98	-173.37	-11.34	9.38
9,037.00	9.10	348.60	9,033.83	-24.95	-174.43	-7.23	10.54
9,069.00	12.40	350.60	9,065.26	-19.08	-175.49	-1.28	10.38
9,101.00	16.00	351.10	9,096.28	-11.33	-176.74	6.56	11.26
9,133.00	19.60	350.90	9,126.74	-1.67	-178.27	16.32	11.25
9,164.00	23.00	349.70	9,155.62	9.42	-180.18	27.55	11.06
9,196.00	27.40	348.10	9,184.57	22.79	-182.81	41.11	13.91
9,228.00	31.60	347.30	9,212.41	38.18	-186.18	56.76	13.18
9,260.00	34.90	346.50	9,239.17	55.26	-190.16	74.16	10.40
9,292.00	38.90	345.60	9,264.76	73.90	-194.79	93.18	12.61
9,324.00	41.90	344.50	9,289.12	93.94	-200.15	113.65	9.64
9,355.00	44.20	343.60	9,311.77	114.28	-205.97	134.48	7.68
9,387.00	46.90	342.60	9,334.18	136.13	-212.61	156.89	8.73
9,419.00	50.30	341.50	9,355.34	158.96	-220.01	180.35	10.93
9,451.00	54.20	341.20	9,374.93	182.93	-228.11	205.01	12.21
9,483.00	58.70	342.20	9,392.61	208.25	-236.47	231.04	14.30
9,515.00	62.50	343.80	9,408.32	234.90	-244.61	258.38	12.65
9,546.00	66.20	344.10	9,421.73	261.75	-252.34	285.88	11.97
9,578.00	69.70	344.40	9,433.74	290.30	-260.39	315.08	10.97
9,610.00	73.30	344.40	9,443.90	319.52	-268.55	344.98	11.25
9,642.00	77.40	344.10	9,451.99	349.31	-276.95	375.47	12.84
9,674.00	81.10	344.10	9,457.96	379.54	-285.56	406.41	11.56
9,702.00	83.30	343.50	9,461.76	406.18	-293.30	433.69	8.14
9,734.00	86.00	344.20	9,464.74	436.78	-302.16	465.03	8.71
9,766.00	87.50	344.80	9,466.55	467.56	-310.70	496.52	5.05
9,798.00	87.80	344.70	9,467.87	498.41	-319.11	528.06	0.99
9,830.00	88.40	344.80	9,468.93	529.27	-327.52	559.61	1.90
9,861.00	89.90	345.20	9,469.39	559.21	-335.54	590.20	5.01
9,957.00	90.50	346.30	9,469.05	652.25	-359.17	685.16	1.31
10,052.00	90.50	347.90	9,468.22	744.85	-380.38	779.42	1.68
10,148.00	90.40	350.60	9,467.47	839.15	-398.28	875.05	2.81
10,243.00	90.60	353.70	9,466.64	933.24	-411.26	969.97	3.27
10,339.00	89.70	356.50	9,466.39	1,028.88	-419.45	1,065.95	3.06
10,435.00	88.70	359.30	9,467.73	1,124.80	-422.97	1,161.73	3.10
10,530.00	89.00	359.20	9,469.63	1,219.77	-424.22	1,256.34	0.33
10,626.00	89.80	359.10	9,470.64	1,315.75	-425.64	1,351.98	0.84



Phoenix Technology Services

Phoenix Final Survey Report



Company:	EOG Resources	Local Co-ordinate Reference:	Well #1H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB @ 3467.00usft (Patterson 452)
Site:	Dillon 31	MD Reference:	KB @ 3467.00usft (Patterson 452)
Well:	#1H	North Reference:	Grid
Wellbore:	WB1/Job #1311413	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Patterson 452)	Database:	GCR DB

Survey							
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)
10,721.00	91.90	359.30	9,469.23	1,410.73	-426.97	1,446.61	2.22
10,816.00	90.30	359.20	9,467.41	1,505.70	-428.21	1,541.22	1.69
10,912.00	90.10	357.70	9,467.07	1,601.66	-430.81	1,636.95	1.58
11,007.00	90.40	357.20	9,466.66	1,696.57	-435.03	1,731.80	0.61
11,103.00	93.30	357.90	9,463.56	1,792.42	-439.13	1,827.57	3.11
11,198.00	90.10	356.60	9,460.74	1,887.25	-443.69	1,922.39	3.64
11,294.00	89.80	356.30	9,460.82	1,983.07	-449.63	2,018.31	0.44
11,389.00	88.20	359.90	9,462.48	2,077.98	-452.78	2,113.06	4.15
11,485.00	90.90	1.30	9,463.24	2,173.96	-451.78	2,208.45	3.17
11,580.00	92.00	0.30	9,460.83	2,268.92	-450.45	2,302.79	1.56
11,676.00	89.90	0.10	9,459.24	2,364.90	-450.12	2,398.25	2.20
11,771.00	91.60	1.70	9,458.00	2,459.88	-448.63	2,492.58	2.46
11,867.00	90.40	0.60	9,456.32	2,555.84	-446.70	2,587.86	1.70
11,962.00	88.60	359.40	9,457.15	2,650.83	-446.70	2,682.37	2.28
12,057.00	89.50	359.90	9,458.73	2,745.81	-447.28	2,776.93	1.08
12,153.00	90.70	0.50	9,458.56	2,841.81	-446.94	2,872.40	1.40
12,248.00	91.30	0.40	9,456.90	2,936.79	-446.20	2,966.82	0.64
12,343.00	92.20	1.60	9,454.00	3,031.73	-444.54	3,061.11	1.58
12,439.00	89.00	0.80	9,452.99	3,127.69	-442.53	3,156.38	3.44
12,534.00	87.90	0.80	9,455.56	3,222.65	-441.21	3,250.71	1.16
12,630.00	87.90	359.30	9,459.08	3,318.58	-441.12	3,346.15	1.56
12,725.00	89.60	358.60	9,461.15	3,413.54	-442.86	3,440.80	1.94
12,821.00	91.20	357.40	9,460.48	3,509.47	-446.21	3,536.58	2.08
12,916.00	89.20	356.40	9,460.15	3,604.32	-451.35	3,631.47	2.35
13,012.00	88.80	356.10	9,461.83	3,700.10	-457.63	3,727.39	0.52
13,107.00	89.10	356.50	9,463.57	3,794.89	-463.76	3,822.31	0.53
13,203.00	90.00	358.70	9,464.32	3,890.80	-467.78	3,918.14	2.48
13,298.00	89.00	358.10	9,465.15	3,985.75	-470.43	4,012.88	1.23
13,394.00	88.90	357.90	9,466.91	4,081.68	-473.78	4,108.65	0.23
13,489.00	89.80	357.70	9,467.99	4,176.60	-477.43	4,203.46	0.97
13,585.00	92.60	358.80	9,465.98	4,272.52	-480.36	4,299.19	3.13
13,680.00	90.70	359.30	9,463.24	4,367.47	-481.93	4,393.80	2.07
13,776.00	91.00	359.30	9,461.82	4,463.45	-483.10	4,489.42	0.31
13,871.00	87.50	0.40	9,463.06	4,558.42	-483.35	4,583.93	3.86
13,967.00	88.70	0.80	9,466.25	4,654.36	-482.35	4,679.28	1.32
14,062.00	89.70	0.90	9,467.57	4,749.34	-480.94	4,773.63	1.06
14,076.00	89.80	0.80	9,467.63	4,763.34	-480.73	4,787.54	1.01
Last Phoenix MWD Survey							
14,132.00	89.80	0.80	9,467.83	4,819.34	-479.95	4,843.17	0.00
Projection to Bit							



Phoenix Technology Services
Phoenix Final Survey Report




Company:	EOG Resources	Local Co-ordinate Reference:	Well #1H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB @ 3467.00usft (Patterson 452)
Site:	Dillon 31	MD Reference:	KB @ 3467.00usft (Patterson 452)
Well:	#1H	North Reference:	Grid
Wellbore:	WB1/Job #1311413	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Patterson 452)	Database:	GCR DB

Survey Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment:
		+N/-S (usft)	+E/-W (usft)	
186.00	185.99	-1.30	-0.08	First Phoenix MWD Survey
14,076.00	9,468.03	4,763.33	-480.85	Last Phoenix MWD Survey
14,132.00	9,468.22	4,819.32	-480.07	Projection to Bit

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------

CURRENT WELL SKETCH


DEPTH (ft)	MARKERS (KB)	LITHOLOGY	OGRID: 7377 API: 30-025-41308 AFE: 105699 SPUD: 10/23/2013 @ 20:00 hrs FRR: 11/9/13 @ 19:30 hrs RIG: Patterson #452	Dillon 31 #1H Red Hills Field Lea County, New Mexico	SURF: 220' FSL & 1815' FEL LOC: Sec. 31 SURVEY: T-24-S, R-34-E GL: 3440.0' KB: 3467.0' ZERO: 27.0' AGL	HOLE SIZE	MW (ppg)	MUD	BHST (°F)	LOT (ppg)	EVALUATION
2,000'	Rustler - 1155'		20" Conductor @ 138' Surface Casing @ 1,187' 13-3/8" 54.5# J-55 BTC Cement lead w/ 550 sx Class "C" + 4% Bentonite + 2% CaCl2 + .25 pps Cello Flake + .005 pps Static Free + .005 GPS FP-6L (13.5 ppt, 1.75 yield). Tall in w/ 300 sx Class "C" + 2% CaCl2 + .005 pps Static Free + .005 GPS FP-6L (14.8			17-1/2"	8.6	FW	86	N/A	
3,000'	T/ Salado - 1405'		TOC @ 4,560' Intermediate Casing @ 5,145' 9-5/8", 40#, J-55, LT&C (0' - 4,000') 9-5/8", 40#, HCK-55, LT&C (4,000' - 5,045') Cement w/ 1100 sx Class C + 2.0% SMS + 0.6% R-3 + 0.25 pps Celloflake + 0.005 pps Static Free (12.7 ppg, 2.21 yld), followed by 200 sx Class C + 0.6% FL-62 + 2.0% Salt + 0.2% R-3 + 0.005 pps Static Free (14.8 ppg, 1.34 yld). Bump plug and circ 397 sx to surface			12-1/4"	10.0	Brine		NA	
5,000'	B / Salado - 4960'										
6,000'	Lamar - 5240'										
7,000'	Bell Canyon - 5270'										
8,000'	Cherry Canyon - 6250'										
9,000'	Brushy Canyon - 7770'										
10,000'	Leonard - 9090'										
11,000'	Bone Spring Lime - 9250'										
	PTD - ~9,565'		KOP @ 8,898' Production Casing @ 14,135' MD, 9,467' TVD 5-1/2" 17# HCP-110 LTC (MJ @ 8854') Cement w/ 350 sx 40:60:10 Class C + 15 bps BA-90 + 4.0% MPA-5 + 3.0% SMS + 5.0% A-10 + 1.0% BA-10A + 0.8% ASA-301 + 1.0% EC-1 + 2.20% R-21 + 8.0 pps LCM-1 + 0.005 pps Static Free + 0.005 gps FP-6L + 0.25% Celloflake (10.8 ppg, 3.68 yld), followed by 400 sx 50:50:6 Class H + 6.0% Bentonite + 0.20% FL-52 + 0.75% CD-32 + 1.0% EC-1 + 0.15% ASA-301 + 1.60% SMS + 5.0% Salt + 0.5% R-21 + 5.0 pps LCM-1 + 0.005 gps FP-6L + 0.005 pps Static Free + 0.25% Celloflake (11.8 ppg, 2.38 yld), followed by 1300 sx 50:50:2 Class H + 2.0% Bentonite + 0.65% FL-52 + 0.70% CD-32 + 1.0% EC-1 + 0.40% SMS + 2.0% Salt + 0.05% R-3 + 0.005 gps FP-6L + 0.005 pps Static Free (14.2 ppg, 1.28 yld). Bump plug and over-displace w/ 5 bbls. Did not circ cement			8-3/4"	8.4	WBM		N/A	
							9.3		140		

Drig Eng:	R. Brosig
Date:	11/11/2013

SCALE: 1" = 1000'

0' 500' 1000'

SECTION 31, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M.
LEA COUNTY, NEW MEXICO

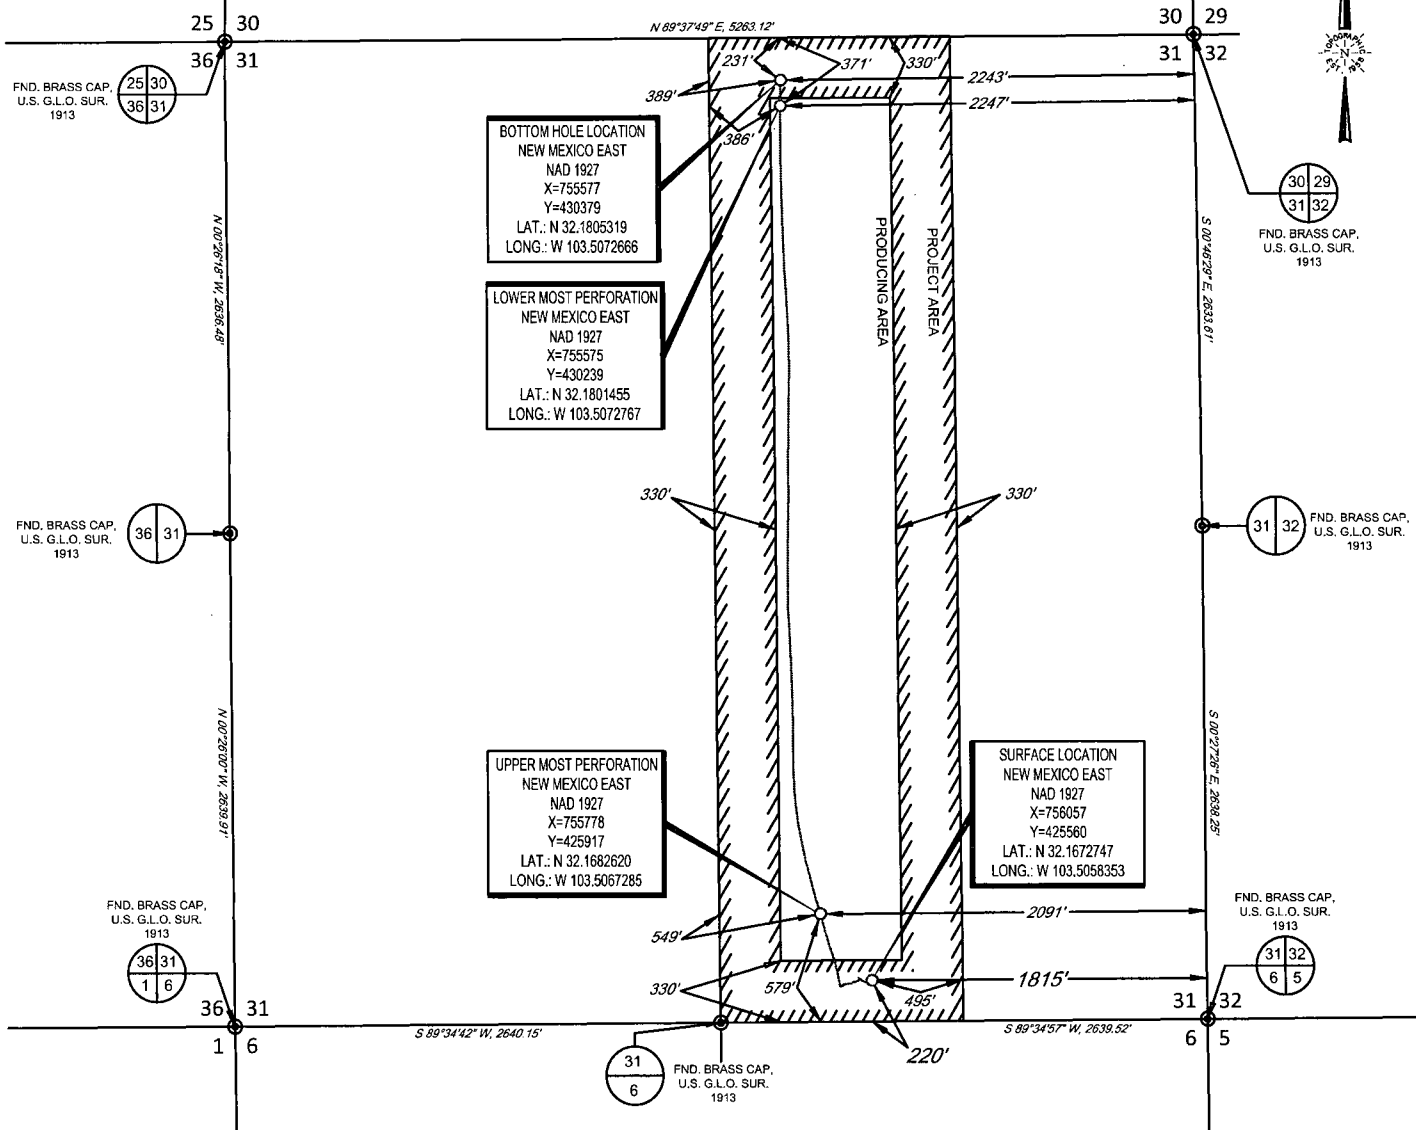


LEASE NAME & WELL NO.: DILLON 31 #1H
SECTION 31 TWP 24-S RGE 34-E SURVEY N.M.P.M.
COUNTY LEA STATE NM ELEVATION 3440'
DESCRIPTION 220' FSL & 1815' FEL



TOPOGRAPHIC
LOYALTY INNOVATION LEGACY

1400 EVERMAN PARKWAY, Ste. 197 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX (817) 744-7548
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM



Michael Blake Brown, P.S. No. 18329
FEBRUARY 5, 2014

eog resources, inc.

DILLON 31 #1H AS-COMPLETED	REVISION:	
	INT	DATE
DATE: 02/05/14		
FILE: AD_DILLON31_1H		
DRAWN BY: S.V.		
SHEET: 1 OF 1		

NOTES:

1. ORIGINAL DOCUMENT SIZE 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 19 27.
3. THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY EOG RESOURCES, INC. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.