

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-05416
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		7. Lease Name or Unit Agreement Name Lovington San Andres Unit
1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection ☐		8. Well Number: 34
2. Name of Operator Chevron Midcontinent, L.P.		9. OGRID Number: 150661
3. Address of Operator 15 Smith Road Midland, TX 79705		10. Pool name or Wildcat Lovington Grayburg San Andres
4. Well Location Unit Letter <u>D</u> : <u>660</u> feet from the <u>North</u> line and <u>660</u> feet from the <u>WEST</u> line Section <u>6</u> Township <u>17-S</u> Range <u>37-E</u> NMPM County <u>Lea</u>		
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3846' DL		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		REMEDIAL E-PERMITTING ☐	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	COMMENCE P&A NR ☐	P&A R ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	CASING/C <u>NT to P&A P.M.</u>	
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CSNG ☐	CHG Loc ☐
DOWNHOLE COMMINGLE ☐		TA ☐	
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-4950' Perfs 4521' - 4950, open hole ' RBP @ 4454'
13" 40# csg @ 314' w/200 sks, 15" hole, TOC: Surface
9-5/8" 36#csg @ 3110' w/500, 11" hole, TOC, 550' calc
7" 20# csg @ 4521' w/200 sks, 7-7/8" hole, TOC: Surface

1. MIRUWSU. NDWH. NUBOP.
2. Try and RBP (Brand unknown)
3. Tag RBP @ 4454' w/25 sks of C cement.
4. Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
5. Perf & Sqz, w/60 sks of C cement @ 3210' - 3010', CTOC. (Shoe)
6. Perf & Sqz w/ 60 sks of C cement @ 2850' - 2650', CTOC. WOC & TAG (Bottom of Salt)
7. Peref & Sqz w/ 60 sks of C cement @ 2210' - 2010', CTOC. WOC & TAG (Top of Salt)
8. Perf & Circulate & Verify 200 sks of C cement @ 365' to Surface.
9. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.
10. CLOSED LOOP SYSTEM USED.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Representative DATE 08/26/2014

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY: [Signature] TITLE Dist. Supervisor DATE 9/2/2014

Conditions of Approval (if any):

SEP 02 2014


Proposed Wellbore Diagram

Created: 10/28/13 By: PTB
 Updated: By:
 Lease: Lovington San Andres Unit
 Field: Lovington San Andres
 Surf. Loc.: 660' FNL & 660' FWL
 Bot. Loc.:
 County: Lea St.: NM
 Status: Injection Well

Well #: 34 St. Lse:
 API 30-025-05416
 Unit Ltr.: D Section: 6
 TSHR/Rng: 17S / 37E
 Unit Ltr.: Section:
 TSHR/Rng:
 Directions: Buckeye, NM
 Chevno: FA6543

Surface Casing

Size: 13"
 Wt., Grd.: 40#
 Depth: 314'
 Sxs Cmt: 200
 Circulate: Yes
 TOC: Surface
 Hole Size: 15"

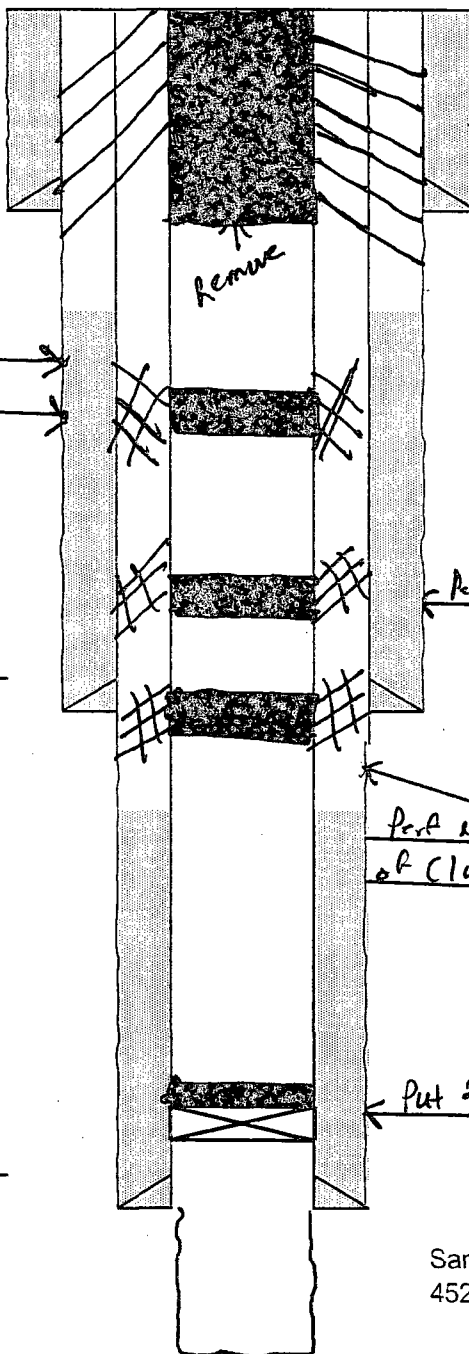

Put 1 Cig. & V. w/ 260 sks
 at Class C @ 360 to surface

RBP @ 280' w/ 2 sx sand on top

History

3/20/63 - Convert to
 injection.

Put 15 sks @ 2850' - 2650' WDC & TAB
 (Lower Brm Sks)

TOP SALT 2110
 BOTTOM SALT 2750

Put 15 sks @ 3210' - 3010' w/ 60 sks
 of Class C (cover shoe)

Put 25 sks of emt WDC & TAB
 RBP @ 4454'

San Andres Open Hole:
 4521' - 4950'

Intermediate Casing

Size: 9-5/8"
 Wt., Grd.: 36#
 Depth: 3110'
 Sxs Cmt: 500 sx
 Circulate: No
 TOC: 550' calc @ 60% fill up
 Hole Size: 11"

Production Casing

Size: 7"
 Wt., Grd.: 20 & 22#
 Depth: 4521'
 Sxs Cmt: 200
 Circulate: No
 TOC: 3467' calc @ 60% fill up
 Hole Size: 8-3/4"

Current Wellbore Diagram

Created: 10/28/13 By: PTB
 Updated: By:
 Lease: Lovington San Andres Unit
 Field: Lovington San Andres
 Surf. Loc.: 660' FNL & 660' FWL
 Bot. Loc.:
 County: Lea St.: NM
 Status: Injection Well

Well #: 34 St. Lse:
 API: 30-025-05416
 Unit Ltr.: D Section: 6
 TSHP/Rng: 17S / 37E
 Unit Ltr.: Section:
 TSHP/Rng:
 Directions: Buckeye, NM
 Chevno: FA6543

Surface Casing

Size: 13"
 Wt., Grd.: 40#
 Depth: 314'
 Sxs Cmt: 200
 Circulate: Yes
 TOC: Surface
 Hole Size: 15"

KB:
 DF: 3,833
 GL: 3,816
 Ini. Spud: 06/25/39
 Ini. Comp.:

RBP @ 280' w/ 2 sx sand on top

Intermediate Casing

Size: 9-5/8"
 Wt., Grd.: 36#
 Depth: 3110'
 Sxs Cmt: 500 sx
 Circulate: No
 TOC: 550' calc @ 60% fillup
 Hole Size: 11"

History

3/20/63 - Convert to injection.

Production Casing

Size: 7"
 Wt., Grd.: 20 & 22#
 Depth: 4521'
 Sxs Cmt: 200
 Circulate: No
 TOC: 3467' calc @ 60% fill up
 Hole Size: 8-3/4"

RBP @ 4454'

San Andres Open Hole:
 4521' - 4950'

