

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
NOV 10 2014

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-10850
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator OXY USA Inc.		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name F.C. H:11 B
4. Well Location Unit Letter <u>K</u> : <u>1980</u> feet from the <u>South</u> line and <u>1980</u> feet from the <u>West</u> line Section <u>27</u> Township <u>23S</u> Range <u>37E</u> NMPM County <u>Lea</u>		8. Well Number <u>1</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>3292'</u>		9. OGRID Number 16696
		10. Pool name or Wildcat Teague Simpson

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	RE P&A NR	P&A R
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	CC INT TO P&A <u>P.M.</u>	COMP
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CSNG	CHG Loc
DOWNHOLE COMMINGLE ☐		TA	RBDMS CHART
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐			

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-9785' PBTD-9394' Perfs-9213-9363' CIBP-9394'
13-3/8" 48# csg @ 295' w/ 300sx, 17-1/4" hole, TOC-Surf-Circ
9-5/8" 36# csg @ 512-2900' w/ 1300sx, 12-1/4" hole, TOC-550'-Calc
7" 23-29# csg @ 9784' w/ 1175sx, DVT @ 3030', 8-3/4" hole, TOC-2368'-Calc
Fish @ 9130-9242' w/ 2-7/8" tbg, seat nipple, mud anchor
1. M&P 70sx cmt @ 9394-9080' WOC-Tag
2. M&P 40sx cmt @ 6990-6828' WOC-Tag
3. M&P 40sx cmt @ 6238-6062' WOC-Tag
4. M&P 25sx cmt @ 5010-4910' WOC-Tag
5. M&P 40sx cmt @ 3630-3460' WOC-Tag
6. M&P 55sx cmt @ 3080-2850' WOC-Tag
7. Perf @ 2410' sqz 40sx cmt to 2310' WOC-Tag
8. Perf @ 1090' sqz 40sx cmt to 990' WOC-Tag
9. Perf @ 345' sqz 290sx cmt to Surface
10# MLF between plugs
Above ground steel tanks will be utilized

Spud Date:

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 11/5/14

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mary Brown TITLE Dist Supervisor DATE 11/10/2014
Conditions of Approval (if any)

NOV 10 2014

OXY USA Inc. - Proposed
E.C. Hill B #1
API No. 30-025-10850

290sx @ 345'-Surface

40sx @ 1090-990' WOC-Tag

40sx @ 2410-2310' WOC-Tag

55sx @ 3080-2850' WOC-Tag

40sx @ 3630-3460' WOC-Tag

25sx @ 5010-4910' WOC-Tag


40sx @ 6238-6062' WOC-Tag

40sx @ 6990-6828' WOC-Tag

70sx @ 9394-9080' WOC-Tag

2014-Fish @ 9130-9242' consisting of
2-7/8"tbg, seat nipple, mud anchor.
1999-CIBP @ 9394'

PB-9715'

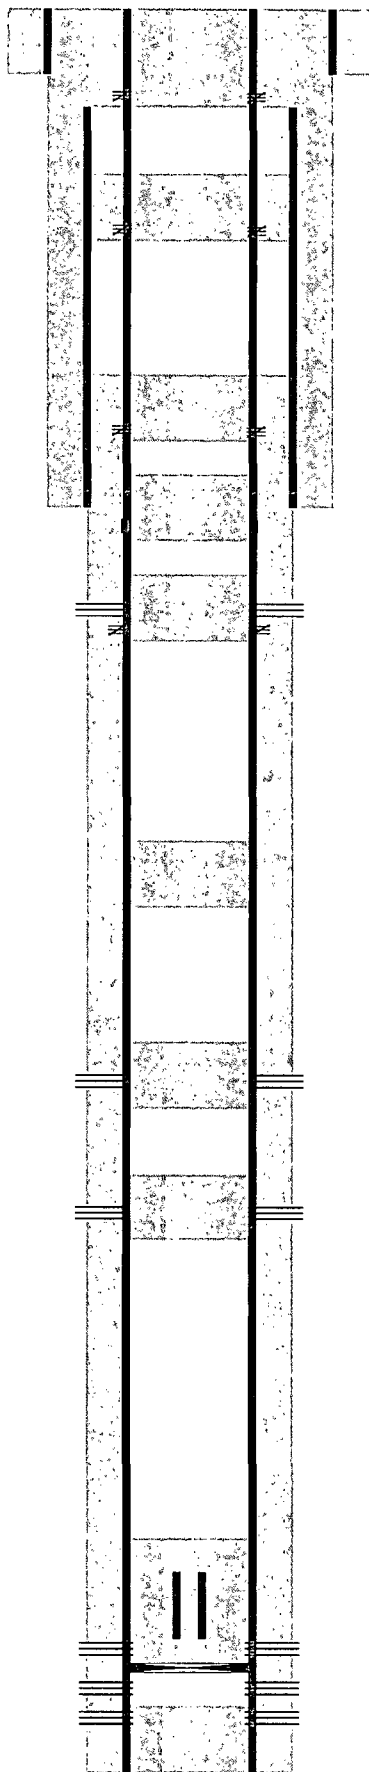

Perf @ 345'

17-1/4" hole @ 295'
13-3/8" csg @ 295'
w/ 300sx-TOC-Surf-Circ

Perf @ 1090'

Perf @ 2410'

12-1/4" hole @ 2900'
9-5/8" csg @ 512-2900'
w/ 1300sx-TOC-550'-Calc
1966-Cut & Pull 512'

1961-Perfs @ 3511-3544'
1961-Perf @ 3580', sqz 100sx-TOC-3210'-TS

1967-Perfs @ 6112-6188'
2001-sqz perfs w/ 467sx cmt

1961-Perfs @ 6878-6940' sqz w/ cmt

8-3/4" hole @ 9785'
7" csg @ 9784'
w/ 1175sx-TOC-*3600'-CBL
*1961-Perf & sqz @ 3580'
*1966-Cut & Pull 3034' csg
*1967-RIH w/ 7", DVT @ 3030'
cmt w/ 100sx-Calc TOC-2368'


Perfs @ 9213-9363'
Perfs @ 9665-9710'
Perfs @ 9720-9750'

TD-9785'

OXY USA Inc. - Current
E.C. Hill B #1
API No. 30-025-10850

2014-Fish @ 9130-9242' consisting of
2-7/8" tbg, seat nipple, mud anchor.
1999-CIBP @ 9394'

PB-9715'

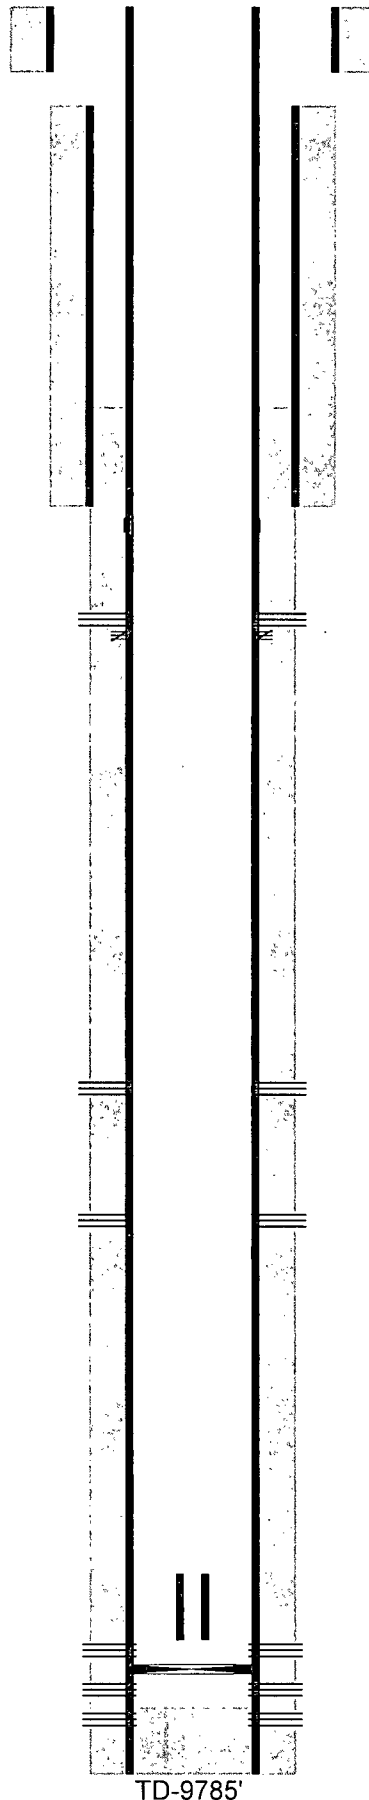

17-1/4" hole @ 295'
13-3/8" csg @ 295'
w/ 300sx-TOC-Surf-Circ

12-1/4" hole @ 2900'
9-5/8" csg @ 512-2900'
w/ 1300sx-TOC-550'-Calc
1966-Cut & Pull 512'

1961-Perfs @ 3511-3544'
1961-Perf @ 3580', sqz 100sx-TOC-3210'-TS

1967-Perfs @ 6112-6188'
2001-sqz perfs w/ 467sx cmt

1961-Perfs @ 6878-6940' sqz w/ cmt

8-3/4" hole @ 9785'
7" csg @ 9784'
w/ 1175sx-TOC-*3600'-CBL
*1961-Perf & sqz @ 3580'
*1966-Cut & Pull 3034' csg
*1967-RIH w/ 7", DVT @ 3030'
cmt w/ 100sx-Calc TOC-2368'

Perfs @ 9213-9363'
Perfs @ 9665-9710'
Perfs @ 9720-9750'

TD-9785'