

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-05855
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name East Eumont Unit
8. Well Number 115
9. OGRID Number 192463
10. Pool name or Wildcat Eumont Yates TR Qn
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3590'

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other Injection

2. Name of Operator
OXY USA WTP Limited Partnership

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
Unit Letter G : 2310 feet from the North line and 2310 feet from the east line
Section 1 Township 20S Range 37E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3590'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-3941' PB-3776' Perfs-3826-3894' CIBP-3776'
13-3/8" 40# csg @ 228' w/ 250sx, 15" hole, TOC-Surf-Circ
8-5/8" 32# csg @ 3386' w/ 700sx, 11" hole, TOC-910'-Calc
5-1/2" 14# liner @ 3275-3941' w/ 250sx, 7-5/8" hole, TOC-3275'-Circ
1. RIH & tag CIBP @ 3776', M&P 25sx cmt to 3625'
2. M&P 75sx cmt @ 3325-3075' WOC-Tag
3. M&P 35sx cmt @ 2775-2675' WOC-Tag
4. M&P 105sx cmt @ 1750-1450' WOC-Tag
5. Perf @ 278' sqz 220sx cmt to surface
10# MLF between plugs

Above ground steel tanks will be utilized

VERIFY CMT TO SURFACE AFTER WELL HEAD CUTOFF.

Sp Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 1/27/15

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mary Brown TITLE Dist. Supervisor DATE 2/2/2015

Conditions of Approval (if any):

FEB 03 2015

OXY USA WTP LP - Proposed
East Eumont Unit #115
API No. 30-025-05855

220sx @ 278'-Surface

105sx @ 1750-1450' WOC-Tag


35sx @ 2775-2675' WOC-Tag

75sx @ 3325-3075' WOC-Tag
3436-

25sx @ 3776-3625'

CIBP @ 3776'

PB-3918'

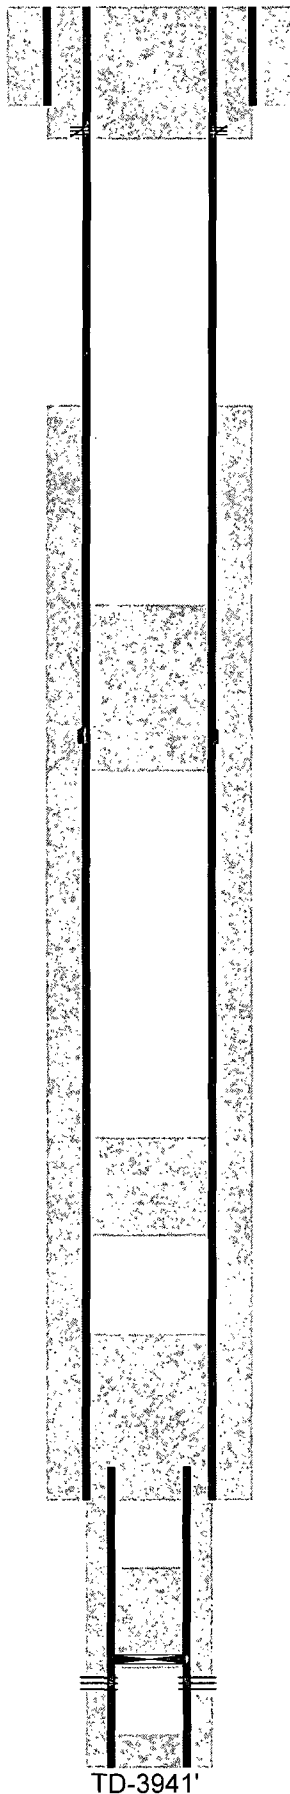

Perf @ 278'

15" hole @ 228'
13-3/8" csg @ 228'
w/ 250sx-TOC-Surf-Circ

11" hole @ 3386'
8-5/8" csg @ 3386' -
DVT @ 1700'
w/ 700sx-TOC-910'-Calc

7-5/8" hole @ 3941'
5-1/2" liner @ 3275-3941'
w/ 250sx-TOC-3275'-Circ

Perfs @ 3826-3894'

TD-3941'

OXY USA WTP LP - Current
East Eumont Unit #115
API No. 30-025-05855

15" hole @ 228'
13-3/8" csg @ 228'
w/ 250sx-TOC-Surf-Circ

11" hole @ 3386'
8-5/8" csg @ 3386'
DVT @ 1700'
w/ 700sx-TOC-910'-Calc

7-5/8" hole @ 3941'
5-1/2" liner @ 3275-3941'
w/ 250sx-TOC-3275'-Circ

CIBP @ 3776'

Perfs @ 3826-3894'

PB-3918'

TD-3941'