

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 3002528312
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator CROWN RUST OPERATING, LLC		6. State Oil & Gas Lease No. 302608
3. Address of Operator Box 53310, Midland, Tx. 79710		7. Lease Name or Unit Agreement Name STATE 26
4. Well Location Unit Letter F : 1980 feet from the NORTH line and 1980 feet from the WEST line Section 26 Township 14S Range 32E NMPM County LRA		8. Well Number 4
11. Elevation (Show whether DR, RKB, RT, GR, etc.) GL 4286		9. OGRID Number 213190
		10. Pool name or Wildcat TULK; PENN

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING <SWD INJECTION>	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REM	CONVERSION ☐ RBDMS ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COM	RETURN TO ☐ TA ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CAS	CSNG ☐ CHG LOC ☐
DOWNHOLE COMMINGLE ☐			INT TO PA ☒ P&A NR ☐ P&A R ☐
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

CIBP @ 9600' w/35' CMT
Cut & Pull 5 1/2" @ 7000' 7050'-6950'
* 50 SKS. @ 7000'-6900' WOC + TAG
* 85 SKS. @ 4179'-4079' WOC + TAG
* 40 SKS. @ 3200'-3100'
* 40 SKS. @ 2600'-2500'
* 40 SKS. @ 1700'-1600'-1500'
* 40 SKS. @ 442'-342' WOC & TAG
10 SKS. @ SURFACE 600'-0'

Fill hole w/9.0 MCF
* PERF & SQZ. if 5 1/2" NOT PULLED
* TAG ALL PERFS & SQZ.

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE R. Smith TITLE R & A Manager DATE 4-13-15

Type or print name Randy Smith E-mail address: RSMITII@PETROSMITH.COM PHONE: 325-691-1085
For State Use Only

APPROVED BY: Mark Brown TITLE Dist. Supervisor DATE 4/16/2015
Conditions of Approval (if any):

APR 16 2015


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

State 26 # 4

Property#: 200990-04

API # 3002528312

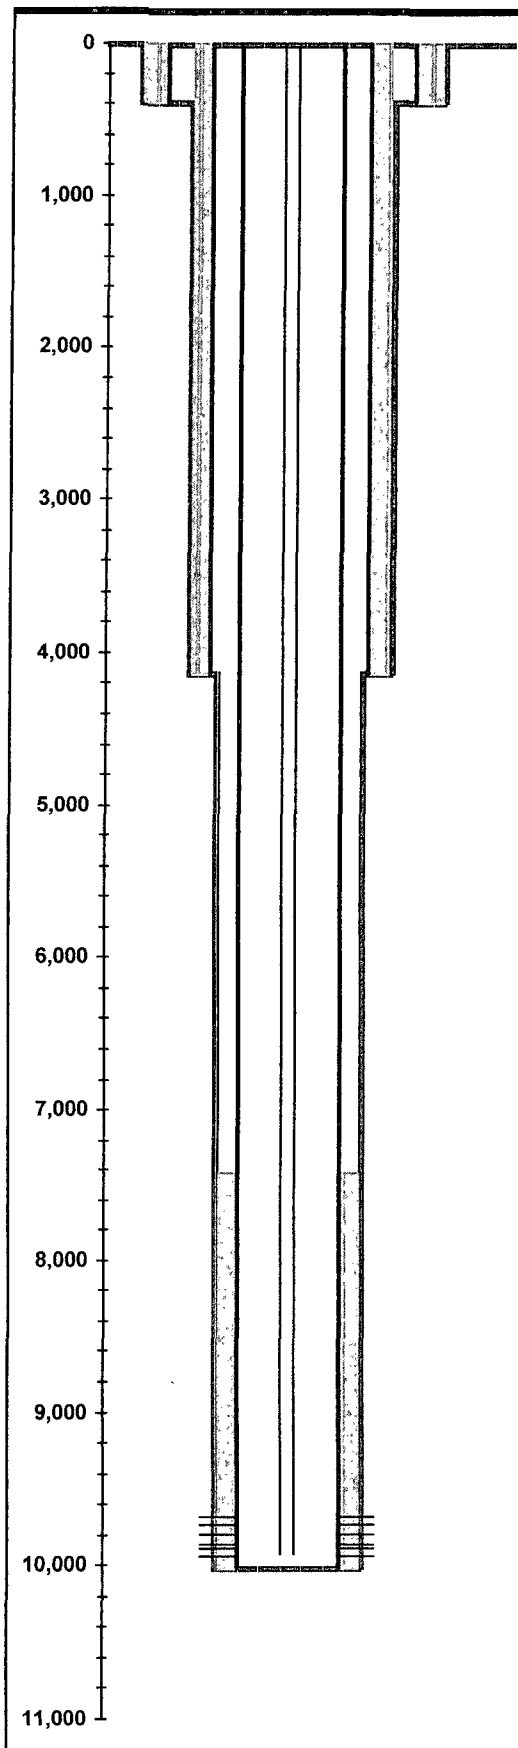

1980' FNL & 1980' FWL	GL Elev: 4,286.00	KOP:	
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 26, ,		Fill Depth:	
County, State: Lea, NM		PBTD:	9,956.00
Aux ID:		TD:	10,015.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
16.5000	0.00	392.00	11/7/1983
11.0000	392.00	4,129.00	11/16/1983
7.8750	4,129.00	10,015.00	12/8/1983

Surface Casing

Date Ran: 11/7/1983

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	10	13.3750	68.00	K55	392.00	0.00	392.00

Intermediate Casing

Date Ran: 11/16/1983

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	98	8.6250	32.00	J55	4,129.00	0.00	4,129.00

32# & 24# and K-55 & J-55.

Production Casing String 1

Date Ran: 12/8/1983

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	243	5.5000	20.00	K55	10,015.00	0.00	10,015.00

20# & 17# and S-95, N-80 & K-55.

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
450	C		13.375	16.500	0.00	392.00	Circ
1450	C		8.625	11.000	0.00	4,129.00	Circ
500	H		5.500	7.875	7,417.00	10,015.00	Calc

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,672.00	9,793.00	PENN	A			1	38
(1 spf, 38 holes) 9672' - 79', 9726' - 29', 9736' - 41', 9744' - 9752', 9783' - 93'							
9,725.00	9,926.00	PENN	A			2	222
(2 spf, 222 holes) 9725'-29', 9736'-52', 9776'-96', 9796'-9806', 9848'-68', 9868'-71', 9882'-9902 9916'-26'							
9,856.00	9,886.00	PENN	A			2	42
(2 spf, 42 holes) 9856' - 71', 9882' - 86'							

Tubing String 1

Date Ran: 12/1/2005

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Tbg Sect 1	316	2.3750	4.70	J55	9,922.00	0.00	9,922.00


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

State 26 # 4

Property#: 200990-04

API # 3002528312

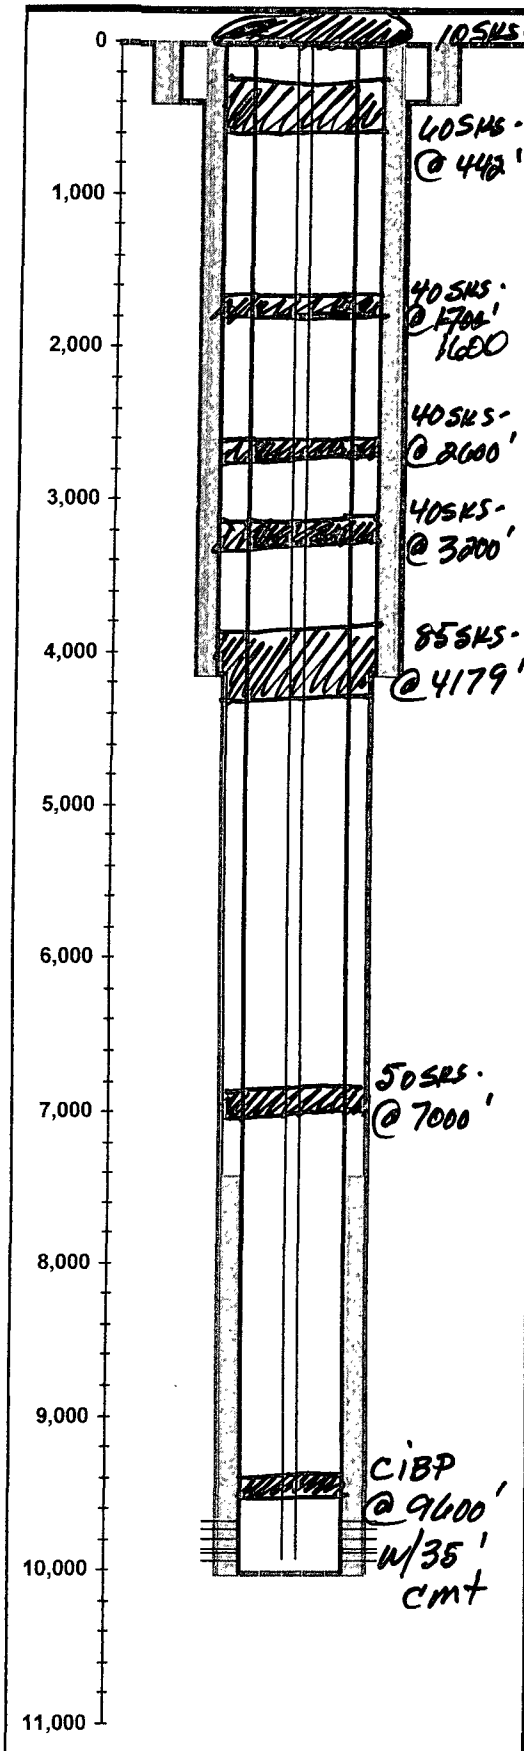

1980' FNL & 1980' FWL	GL Elev: 4,286.00	KOP:	
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 26, ,		Fill Depth:	
County, State: Lea, NM		PBTD:	9,956.00
Aux ID:		TD:	10,015.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
16.5000	0.00	392.00	11/7/1983
11.0000	392.00	4,129.00	11/16/1983
7.8750	4,129.00	10,015.00	12/8/1983

Surface Casing

Date Ran: 11/7/1983

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	10	13.3750	68.00	K55	392.00	0.00	392.00

Intermediate Casing

Date Ran: 11/16/1983

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	98	8.6250	32.00	J55	4,129.00	0.00	4,129.00
32# & 24# and K-55 & J-55.							

Production Casing String 1

Date Ran: 12/8/1983

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	243	5.5000	20.00	K55	10,015.00	0.00	10,015.00
20# & 17# and S-95, N-80 & K-55.							

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
450	C		13.375	16.500	0.00	392.00	Circ
1450	C		8.625	11.000	0.00	4,129.00	Circ
500	H		5.500	7.875	7,417.00	10,015.00	Calc

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,672.00	9,793.00	PENN	A			1	38
(1 spf, 38 holes) 9672' - 79', 9726' - 29', 9736' - 41', 9744' - 9752', 9783' - 93'							
9,725.00	9,926.00	PENN	A			2	222
(2 spf, 222 holes) 9725'-29', 9736'-52', 9776'-96', 9796'-9806', 9848'-68', 9868'-71', 9882'-9902'							
9,856.00	9,886.00	PENN	A			2	42
(2 spf, 42 holes) 9856' - 71', 9882' - 86'							

Tubing String 1

Date Ran: 12/1/2005

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Tbg Sect 1	316	2.3750	4.70	J55	9,922.00	0.00	9,922.00