

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

HOBBS OCD

SUBMIT IN TRIPLICATE - Other instructions on reverse side

JUL 21 2015

1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other		5. Lease Serial No. NMLC031670A
2. Name of Operator CONOCOPHILLIPS COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address MIDLAND, TX 79710		7. If Unit or CA/Agreement, Name and/or No. 892000321E
3b. Phone No. (include area code) Ph: 281-206-5612		8. Well Name and No. SEMU 266
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 19 T20S R38E NESE 1488FSL 160FEL 32.331942 N Lat, 103.104718 W Lon		9. API Well No. 30-025-42024-00-S1
		10. Field and Pool, or Exploratory SKAGGS
		11. County or Parish, and State LEA COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☒ Subsequent Report	☐ Alter Casing	☐ Fracture Treat	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	Drilling Operations
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompletable horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletable in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Completion operations were monitored according to agreements.
Chris Walls at BLM was notified of backside pressure and CBL was ran on
11/20/2014 Ran PT @ 2,000#/ 2 mins. & 6,730# for 10 mins-test good.
11/28/2014 RIH w/ perf gun & shot perfs # 3,868-3,998'. Frac stage 1 w/ 2,000 gals of 15% acid &
70,490# of proppants. Currently there is no pressure in the annulus.
2/9/2015 RIH & D.O plugs to 4,122
2/17/2015 ND BOP NU WH RDMO

14. I hereby certify that the foregoing is true and correct. Electronic Submission #296765 verified by the BLM Well Information System For CONOCOPHILLIPS COMPANY, sent to the Hobbs Committed to AFMSS for processing by LINDA JIMENEZ on 04/01/2015 (15LJ0889SE)	
Name (Printed/Typed) TAMARICA STEWART	Title REGULATORY TECHNICIAN
Signature (Electronic Submission)	Date 03/31/2015

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By ACCEPTED	CHRISTOPHER WALLS Title PETROLEUM ENGINEER	Date 07/16/2015
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

JUL 21 2015

jm



Post-Job Report

Conoco Phillips

SEMU 266

Table of Contents:

- Proposal
- Treatment Reports
- Work Ticket
- Inventory
- Plots



ConocoPhillips

SEMU 266

Lea County, NM
1 Stage Acid and Stimulation Treatment

Prepared for Curt Sievert
ConocoPhillips
(432) 688-9157

Prepared by Larry Bagley
(870) 784-6677

Universal Pressure Pumping, Inc.

Midland
Contact: Bobby Duty
(432) 570-4899

26-Nov-14

Longitude: 103.179297

FLUID SPECIFICATIONS

CHEMICAL

UOM

LOADING PER 1000 GALS.

Gal
Gal
Gal
Gal
Gal
Gal
Lb
Gal
i Gal

[illegible]

Gal

Additional Information:

Please Bring B-6E to run at a 2.50 gpt if needed.

ConocoPhillips
SEMUR 266
Lea County, NM
1 Stage Acid and Stimulation Treatment
26-Nov-14

Pump Schedule

Zone: Grayburg Perforations: 3868 - 3998 # Perfs: 60 Perf Diameter: 0.42 Frac Gradient: 0.79 Est Closure Pressure: 2526.736				Bottom Hole Temp (°F): 125 Porosity (%): - Permeability (md): - Frac Height: - Est Treating PSI: 4,000 Max Allowable PSI: 6,730			
Stage	Fluid	Gallons	Prop	Proppant	Rate	Slurry Bbls.	Stage Time
Acid	15% NEFe HCl Acid	2,000			10	47.6	4.8
Displace	AmGelMax 1010 (10# Linear Gel)	4,000			60	95.2	1.6
Pad	AmBorMax 1020 (20# Xlink Gel)	15,000			60	357.1	6.0
1.00	AmBorMax 1020 (20# Xlink Gel)	3,000	16-30 mesh Brown Sand, Area 1	3,000	60	74.7	1.2
2.00	AmBorMax 1020 (20# Xlink Gel)	4,000	16-30 mesh Brown Sand, Area 1	8,000	60	103.9	1.7
3.00	AmBorMax 1020 (20# Xlink Gel)	4,000	16-30 mesh Brown Sand, Area 1	12,000	60	108.2	1.8
4.00	AmBorMax 1020 (20# Xlink Gel)	4,000	16-30 mesh Brown Sand, Area 1	16,000	60	112.5	1.9
5.00	AmBorMax 1020 (20# Xlink Gel)	4,000	16-30 mesh Brown Sand, Area 1	20,000	60	116.8	1.9
5.00	AmBorMax 1020 (20# Xlink Gel w/Superset)	4,000	Santrol Super LC, 16/30 mesh - Curable	20,000	60	117.6	2.0
6.00	AmBorMax 1020 (20# Xlink Gel w/Superset)	3,500	Santrol Super LC, 16/30 mesh - Curable	21,000	60	106.8	1.8
Flush	AmGelMax 1010 (10# Linear Gel)	3,720			60	88.6	1.5
Stage Totals		51,220		100,000		1,329	26.1



TREATMENT REPORT

GENERAL INFORMATION.

Customer	Conoco Phillips	County	Lea	Job No.	115006712	Date	11/29/14
Well #	SEMU 266	District	MIDLAND	Location	- 30-254-2024		
Lease	0	State	NM	Job Type	Frac	Stage No.	1 of 1

WELL DATA

Formation	Grayburg	Type	0	TVD	0	PBTD	0
Casing Size	5 1/2 "	Weight	17 #	Grade	L-80	Set From//To	0
Liner Size	0	Weight	0	Grade	0	Set From//To	
Tubing Size		Weight		Grade		Set From//To	
Packer Type		Set At					
No. Perfs	60	Perf Size	0.42	Interval	3868	3998	

TREATMENT DATA.

Base Fluid Type	0	Base Vol.	
Pad Type	Slickwater (Linear Gel)	Pad Vol.	17598 gal
Treatment Fluid	AmBorMax XL Gel	Trmt Vol.	43470 gal
Wellbore Fluid		Treat Via	Casing

CAPACITIES

Tubing Capacity		Flush Volume	90 bbl
Casing Capacity	90 bbl	Fluid to Load	0 bbl
Annulus Capacity		Fluid to Recover	1762 bbl
Hole Capacity	0 bbl	Slurry Volume	1850 bbl

PROPPANT DATA

Prop 1	16-30 Brow	Mesh	Quantity	59,142
Prop 2	16-30 Super LC	Mesh	Quantity	31,020
Prop 3	0	Mesh	Quantity	0
		Mesh	Total sand	90,162


CHEM DATA

Acid	2000	CX-9	61	SI-1	49
CIA-5	6	B-6E	55	B3L	5
I2-L	6	BIO-15	30		
NE-1	2	S-602	64		


PROCEDURE SUMMARY

[illegible]

ConocoPhillips SEMU 266 -NET- 1of1

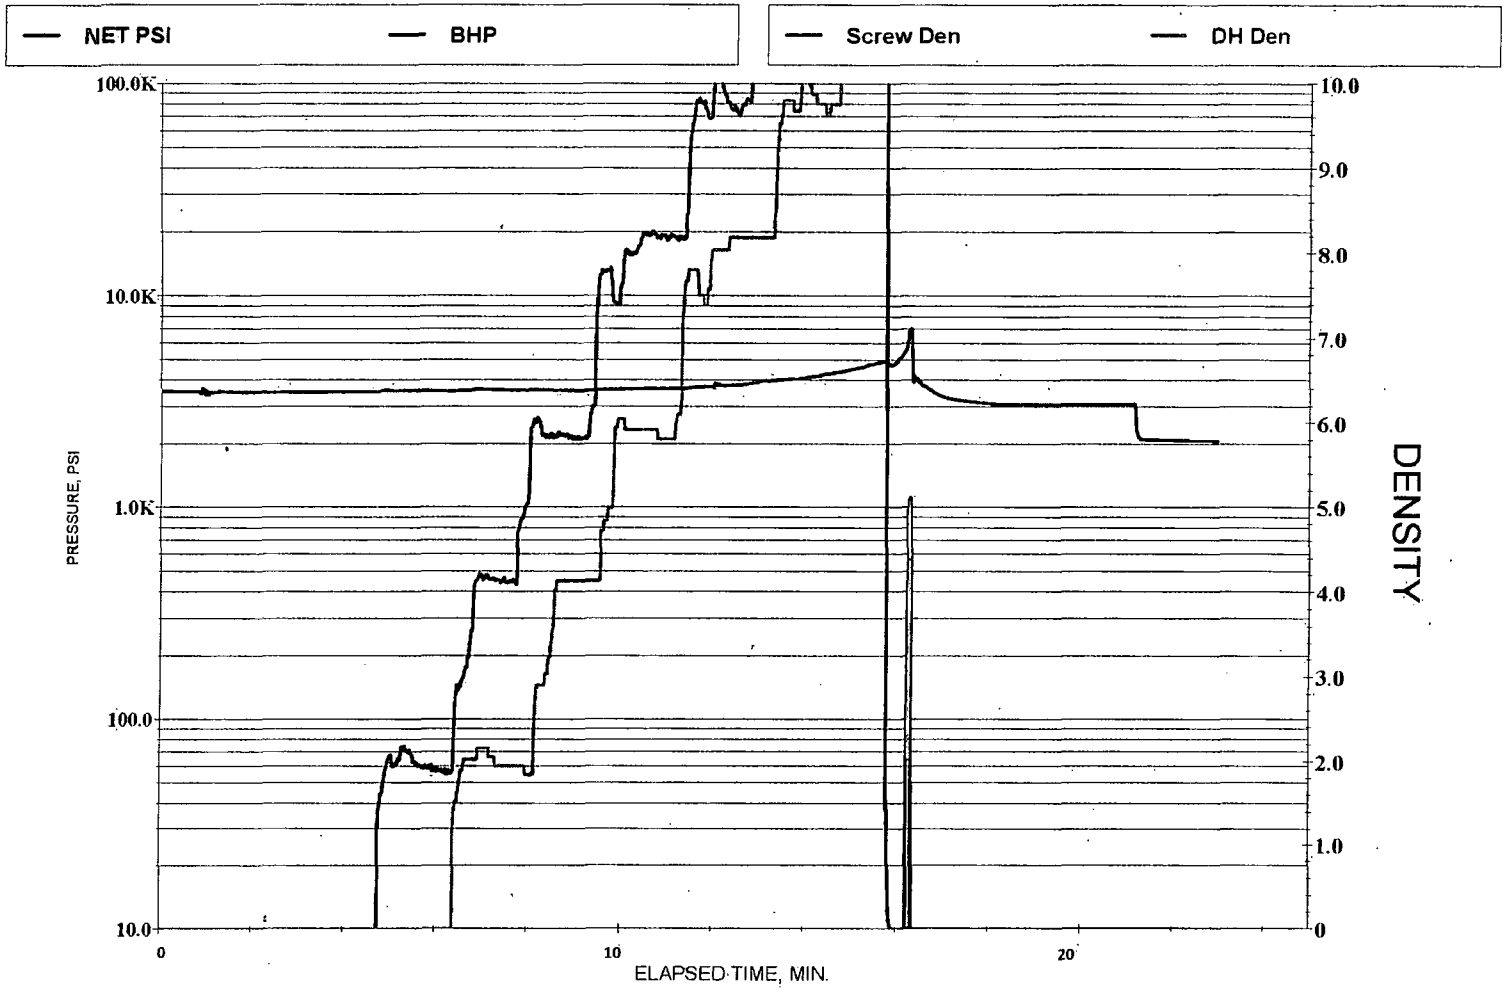

ConocoPhillips SEMU 266 -CHEM- 1of1

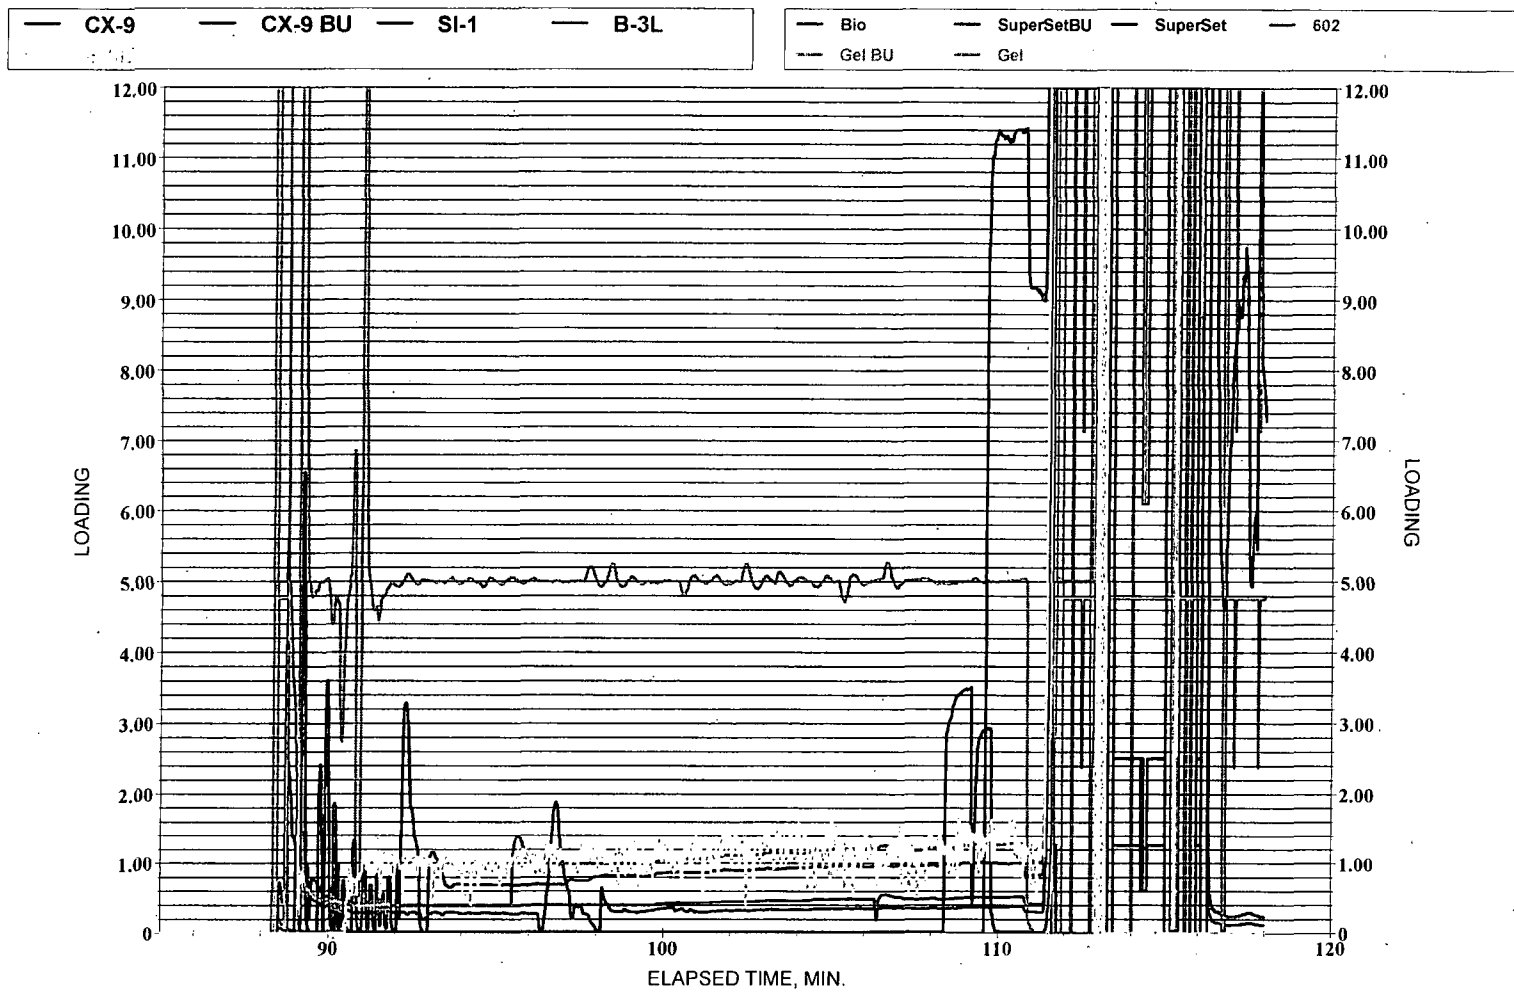

ConocoPhillips SEMU 266 -SIM- 1of1

