

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-10) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-35204
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator MATADOR PRODUCTION COMPANY		6. State Oil & Gas Lease No.
3. Address of Operator 5400 LBJ FREEWAY, STE. 1500, DALLAS, TX 75240		7. Lease Name or Unit Agreement Name COOPER 3
4. Well Location Unit Letter B : 458 feet from the NORTH line and 1704 feet from the EAST line Section 3 Township 20S Range 37E NMPM County LEA		8. Well Number 6
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3561 GL		9. OGRID Number 228937
		10. Pool name or Wildcat SKAGGS; SIMPSON, NORTHWEST

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING <SWD INJECTION>	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	CONVERSION	RBDMS
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	RETURN TO	TA
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CSNG	CHG LOC
DOWNHOLE COMMINGLE ☐		INT TO P&A NR	P&A R
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐			

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) MIRU Pulling Unit. POOH & LD rods & pump.
- 2) Blow well down, ND WH & NU BOP RU lubricator, RIH w/tbg plug set in pkr
- 3) Release on/off tool PUH dump 15 sx cmt on top of pkr
- 4) Circulate drilling mud
- 5) PUH and place balance plug ~7600' w/10 sx class "C" cmt from ~7600'--~7630' WOC/TAG
- 6) Perf @ ~4010' sqz w/25 sx class "C" cmt ~4010'-3985' WOC/TAG
- 7) Perf @ ~120' sqz w/150 sx class "C" from ~120' to surface plug.
- 8) Cut off wellhead, verify cement in annulus, and install NMOCD spec "FLAT" dry hole marker.
- 9) RDMO PU, and aux equipment. Clean location of all debris, and prep location to initiate final reclamation procedures.

Current and proposed wellbore schematics attached.

Spud Date: 10/30/00

Rig Release Date:

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours

Prior to the beginning of operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ava Monroe TITLE Sr. Engineering Technician DATE 7/22/15

Type or print name Ava Monroe E-mail address: amonroe@matadorresources.com PHONE: 972-371-5218

For State Use Only

APPROVED BY: Malcolm Brown TITLE Dist Supervisor DATE 7/27/2015

Conditions of Approval (if any):


JUL 28 2015

Cooper 3-6
API:3002535204
Sec 3 - 20S - 37E
Lea County, NM
WELLBORE SCHEMATIC

Current as of 7/14/15
Bethlehem 228D - 246 - 86 pmpg unit
25 hp elect motor
Stroke = 74" at 6 SPM

GL = 3561'
KB = 15'
KB = 3576'

Spud Date: 10/30/2000
Prepared by: mge
Updated by: rp 7/14/15

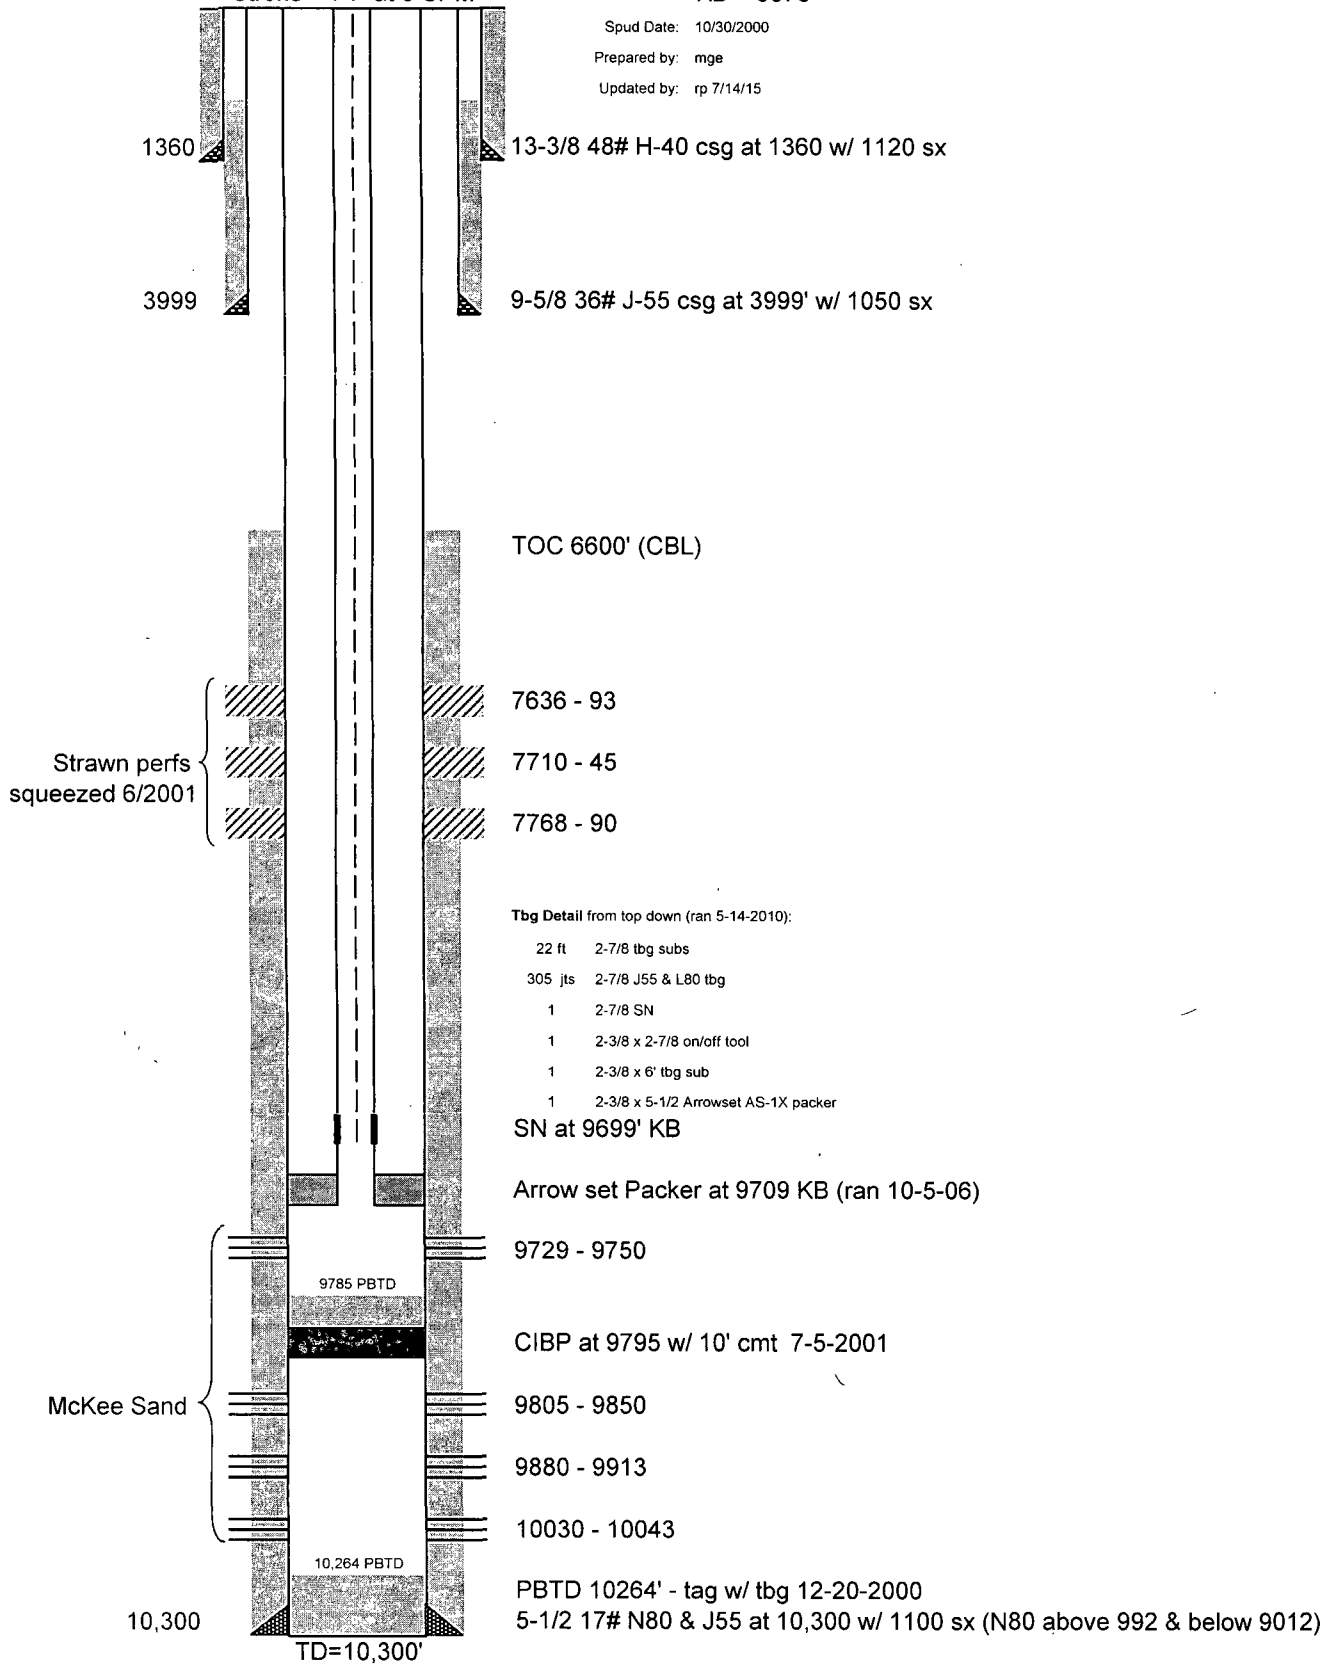

Cooper 3-6
 Sec 3 - 20S - 37E
 Lea County, NM
 Proposed P&A Wellbore Schematic

Prepared by: R. Patel
 Date: July 14/2015

