

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
June 19, 2008

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-28020
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name New Mexico AT State
8. Well Number 9
9. OGRID Number 213190
10. Pool name or Wildcat SAUNDERS PERMO Upper Penn
11. Elevation (Show whether DR, RKB, RT, GR, etc.) G.L. 4214'

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Crown Quest

3. Address of Operator
P.O. Box 53310 Midland, TX 79710

4. Well Location
Unit Letter **M** : **860** feet from the **South** line and **660'** feet from the **West** line
Section **15** Township **14S** Range **33E** NMPM **LCA** County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
G.L. 4214'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING <SWD INJECTION>	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	RE CONVERSION ☐	RBDMS ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	CC RETURN TO ☐	TA ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CA CSNG ☐	ENVIRO ☐
DOWNHOLE COMMINGLE ☐		INT TO PATM ☒	P&A NR ☐
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Move in and rig up. T1H w/ bit and scraper to 9850'.
POOH. Rig up wireline. Set. C.I.B.P. @ 9750'.

2. T1H w/ tbg. Circulate hole w/ mud laden fluid. Spot 25 sx cmt. on top of C.I.B.P. WOC - Tag. Spot 25 sx. cmt. 7095' - 6935' WOC - Tag (DV TOOL)

3. Spot 25 sx. cmt. 4265' - 4105' WOC - tag (8 5/8" shoe)
Spot 25 sx cmt 2600' - 2440' WOC - Tag Spot 25 sx cmt. 1650' - 1490' WOC TAG.

4. Spot 80 sx. 520' to surface. Cut off wellhead. Erect
dry hole marker. Rig down. Clean Locat. ow. Move out

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G.A. Baber TITLE Agent DATE 08/11/15
Type or print name G.A. Baber E-mail address: gababer@hotmail.com PHONE: 392-2495
For State Use Only

APPROVED BY: Mary Brown TITLE Dist. Supervisor DATE 8/12/2015
Conditions of Approval (if any):

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

AUG 12 2015


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

New Mexico AT State # 9

Property#: 200754-09

API # 3002528020

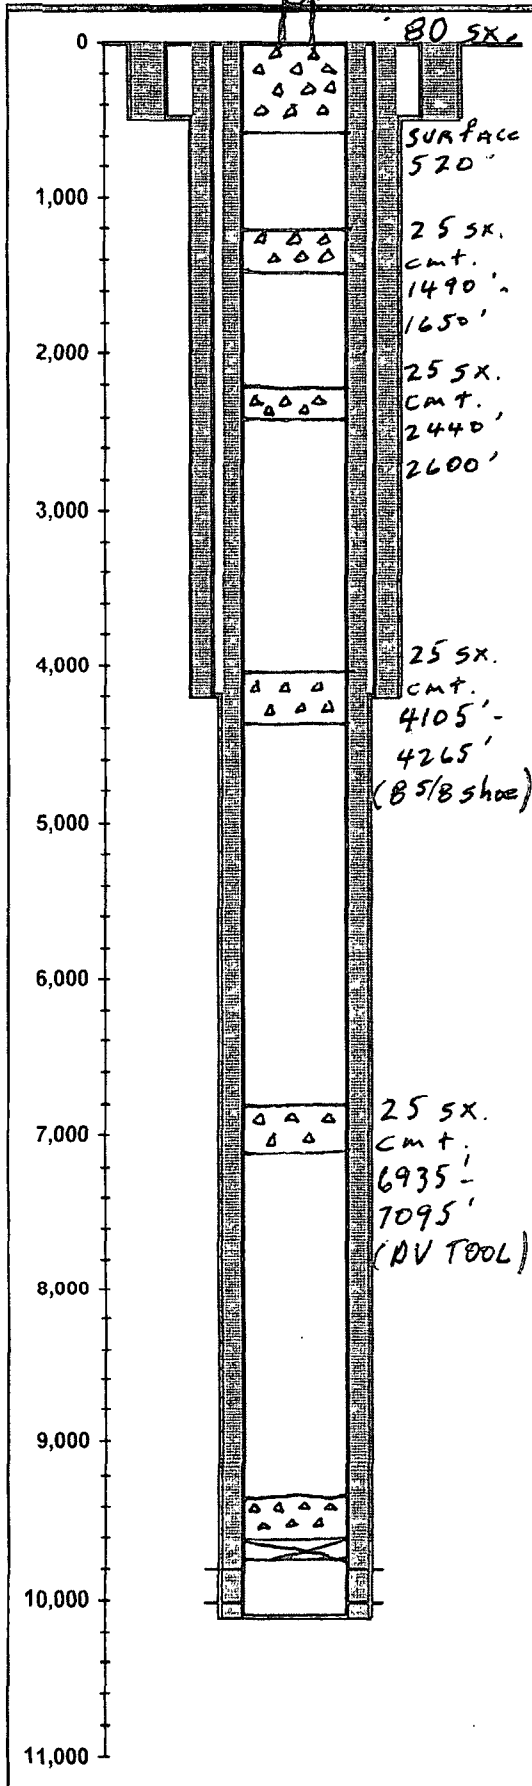

860' FSL & 660' FWL	GL Elev: 4,214.00	KOP:
Sec, Blk, Sur (Lbr, Lge, Sur) or (Sec, Twn, Rng): 15, ,	Fill Depth:	
County, State: Lea, NM	PBTD:	10,065.00
Aux ID:	TD:	10,100.00
KB = ; DF = ; All Depths Corr To:	BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	470.00	12/1/1982
11.0000	470.00	4,185.00	12/10/1982
7.8750	4,185.00	10,100.00	12/24/1982

Surface Casing

Date Ran: 12/1/1982

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	13	13.3750	48.00	H40	470.00	0.00	470.00

Intermediate Casing

Date Ran: 12/10/1982

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	99	8.6250	24.00	J55	4,185.00	0.00	4,185.00

Production Casing String 1

Date Ran: 12/24/1982

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	169	5.5000	17.00	J55	7,015.00	0.00	7,015.00
17# & 15.5# J-55, N-80 and S-95.							
D V Tool	1	5.5000			3.00	7,015.00	7,018.00
Casing	73	5.5000	17.00	J55	3,082.00	7,018.00	10,100.00

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
700	H		13.375	17.500	0.00	470.00	Circ
1800	H		8.625	11.000	0.00	4,185.00	Circ
2000	H		5.500	7.875	0.00	10,100.00	Circ

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,806.00	10,015.00	PENN	A			2	42

(2 spf, 42 holes) 9806', 09', 36', 53', 58', 61', 98', 99', 9900', 01', 08', 10', 25', 27', 58', 60', 65', 9971', 10,013', 14', & 10,015'

25 SX. cmt. on top
C.I.B.P. @ 9750'


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

New Mexico AT State # 9

Property#: 200754-09

API # 3002528020

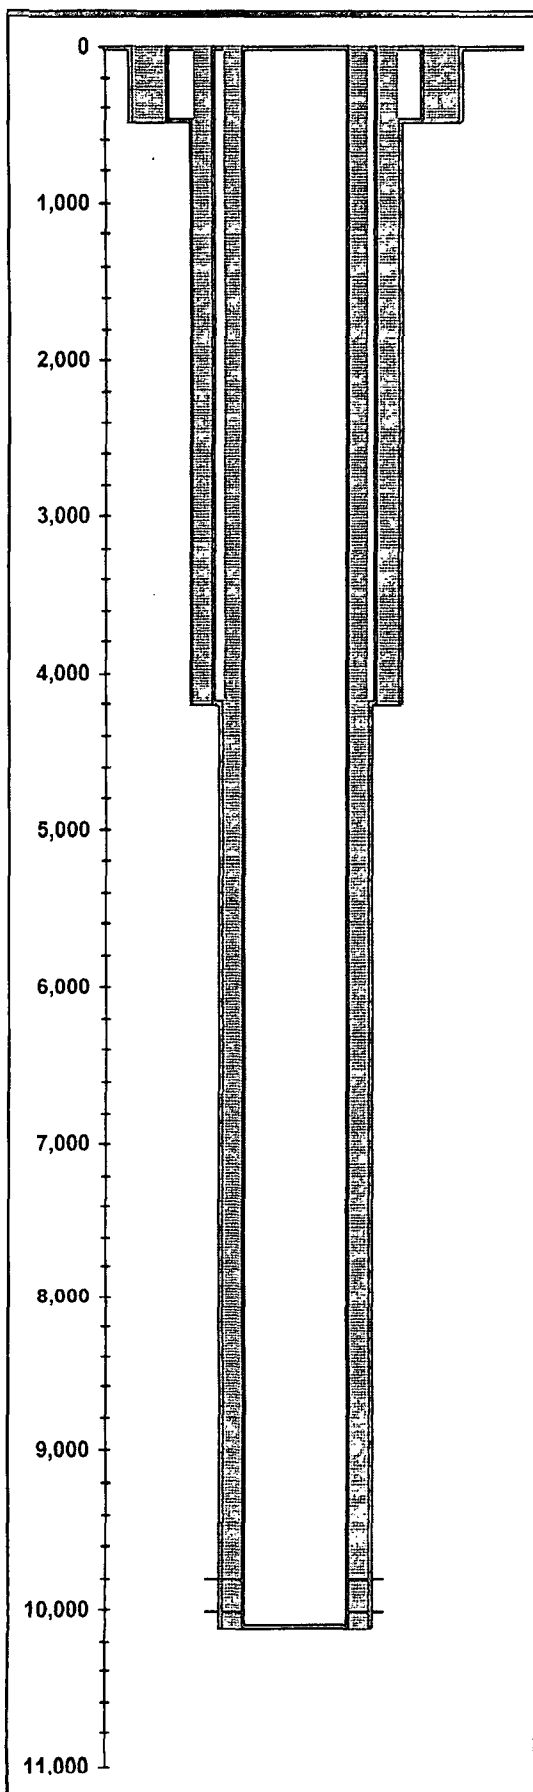

860' FSL & 660' FWL	GL Elev: 4,214.00	KOP:
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 15, ,		Fill Depth:
County, State: Lea, NM		PBTD: 10,065.00
Aux ID:		TD: 10,100.00
KB = : DF = : All Depths Corr To:		BOP:

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	470.00	12/1/1982
11.0000	470.00	4,185.00	12/10/1982
7.8750	4,185.00	10,100.00	12/24/1982

Surface Casing

Date Ran: 12/1/1982

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	13	13.3750	48.00	H40	470.00	0.00	470.00

Intermediate Casing

Date Ran: 12/10/1982

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	99	8.6250	24.00	J55	4,185.00	0.00	4,185.00

Production Casing String 1

Date Ran: 12/24/1982

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	169	5.5000	17.00	J55	7,015.00	0.00	7,015.00

17# & 15.5# J-55, N-80 and S-95.

D V Tool	1	5.5000			3.00	7,015.00	7,018.00
Casing	73	5.5000	17.00	J55	3,082.00	7,018.00	10,100.00

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
700	H		13.375	17.500	0.00	470.00	Circ
1800	H		8.625	11.000	0.00	4,185.00	Circ
2000	H		5.500	7.875	0.00	10,100.00	Circ

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,806.00	10,015.00	PENN	A			2	42

(2 spf, 42 holes) 9806', 09', 36', 53', 58', 61', 98', 99', 9900', 01', 08', 10', 25', 27', 58', 60', 65', 9971', 10,013', 14', & 10,015'