

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-06184
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 015823
7. Lease Name or Unit Agreement Name Eunice Monument Unit
8. Well Number 12
9. OGRID Number 003044
10. Pool name or Wildcat Eunice Monument; Grayburg-San Andres

4. Well Location Unit Letter <u>F</u> : <u>1980</u> feet from the <u>North</u> line and <u>1980</u> feet from the <u>West</u> line Section <u>19</u> Township <u>20 South</u> Range <u>37 East</u> NMPM Lea County
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3540' DF

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other - Shut-in

2. Name of Operator

Burgundy Oil & Gas of New Mexico, Inc.

3. Address of Operator

401 W. Texas Ave., Suite 1003 Midland, TX 79701

4. Well Location

Unit Letter F : 1980 feet from the North line and 1980 feet from the West line
Section 19 Township 20 South Range 37 East NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3540' DF

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☒
OTHER: ☐

E-PERMITTING <SWD INJECTION>
CONVERSION _____ RBDMS _____
RETURN TO _____ TA _____
CSNG _____ ENVIRO _____ CHG LOC _____
INT TO PA _____ P&A NR _____ P&A R _____
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Circ MLF; press test casing
2. 25 sx plug 2500' - 2300'
3. Perf @ 1168'; sq w/ 25 sx; WOC; tag @ 1068' or above
4. Perf @ 185'; sq w/ 35 sx
5. Dry hole marker & clean location

All void areas between plugs fill w/ 9.5 ppg mud laden fluid

**The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations**

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Cindy Campbell TITLE Production Accountant DATE 08/24/2015

Type or print name Cindy Campbell E-mail address: ccampbell.bogi@att.net PHONE: 432-684-4033

For State Use Only

APPROVED BY: Mary Brown TITLE Dist Supervisor DATE 8/31/2015

Conditions of Approval (if any):

AUG 31 2015

FIELD	EUNICE-MONUMENT GB-SI	OPERATOR	TEXACO INC.	DATE	APRIL 26, 1976
LEASE	EUNICE-MONUMENT UNIT	WELL NO.	12	LOCATION	1-19-205-37E

ORIG TEXAS CO. ST. of NM "H" Unit #19 5407-14

φ 8-37

DF 3540'
CL 3530'

"Current Well Bore"

$10 \frac{3}{4}$ " ^{32.75'} casing set at 137' with 12.5 sx of Common cement
Hole size 12 7/8"

$7 \frac{5}{8}$ " ^{26.4'} casing set at 1118' with 22.5 sx of Common cement
Hole size 9 5/8"

12-'58 F/OH w/ 20K gal Ref Oil x 20K lbs sand

3-'62 Vissqz OH 3765-3865' w/ 100K cement
5 10/15 gal Kerosene

$5 \frac{1}{2}$ " ^{17'} casing set at 3675' with 160 sx of _____ cement
Hole size 6 3/4" est. TOC 1600'

POTD 3791'

Total Depth 3865'

18P5A
3600'
apw/40'
ent


FIELD	EUNICE-MONUMENT GR-SI	OPERATOR	TEXACO INC.	DATE	APRIL 26, 1976
LEASE	EUNICE-MONUMENT UNIT	WELL NO.	12	LOCATION	A-19-205-37E

OR 16 TEXAS CO. ST. of NM "H" UNIT #19 SHUT-IN

8-39

DF 3540'
CL 3530'

"Proposed well bore"

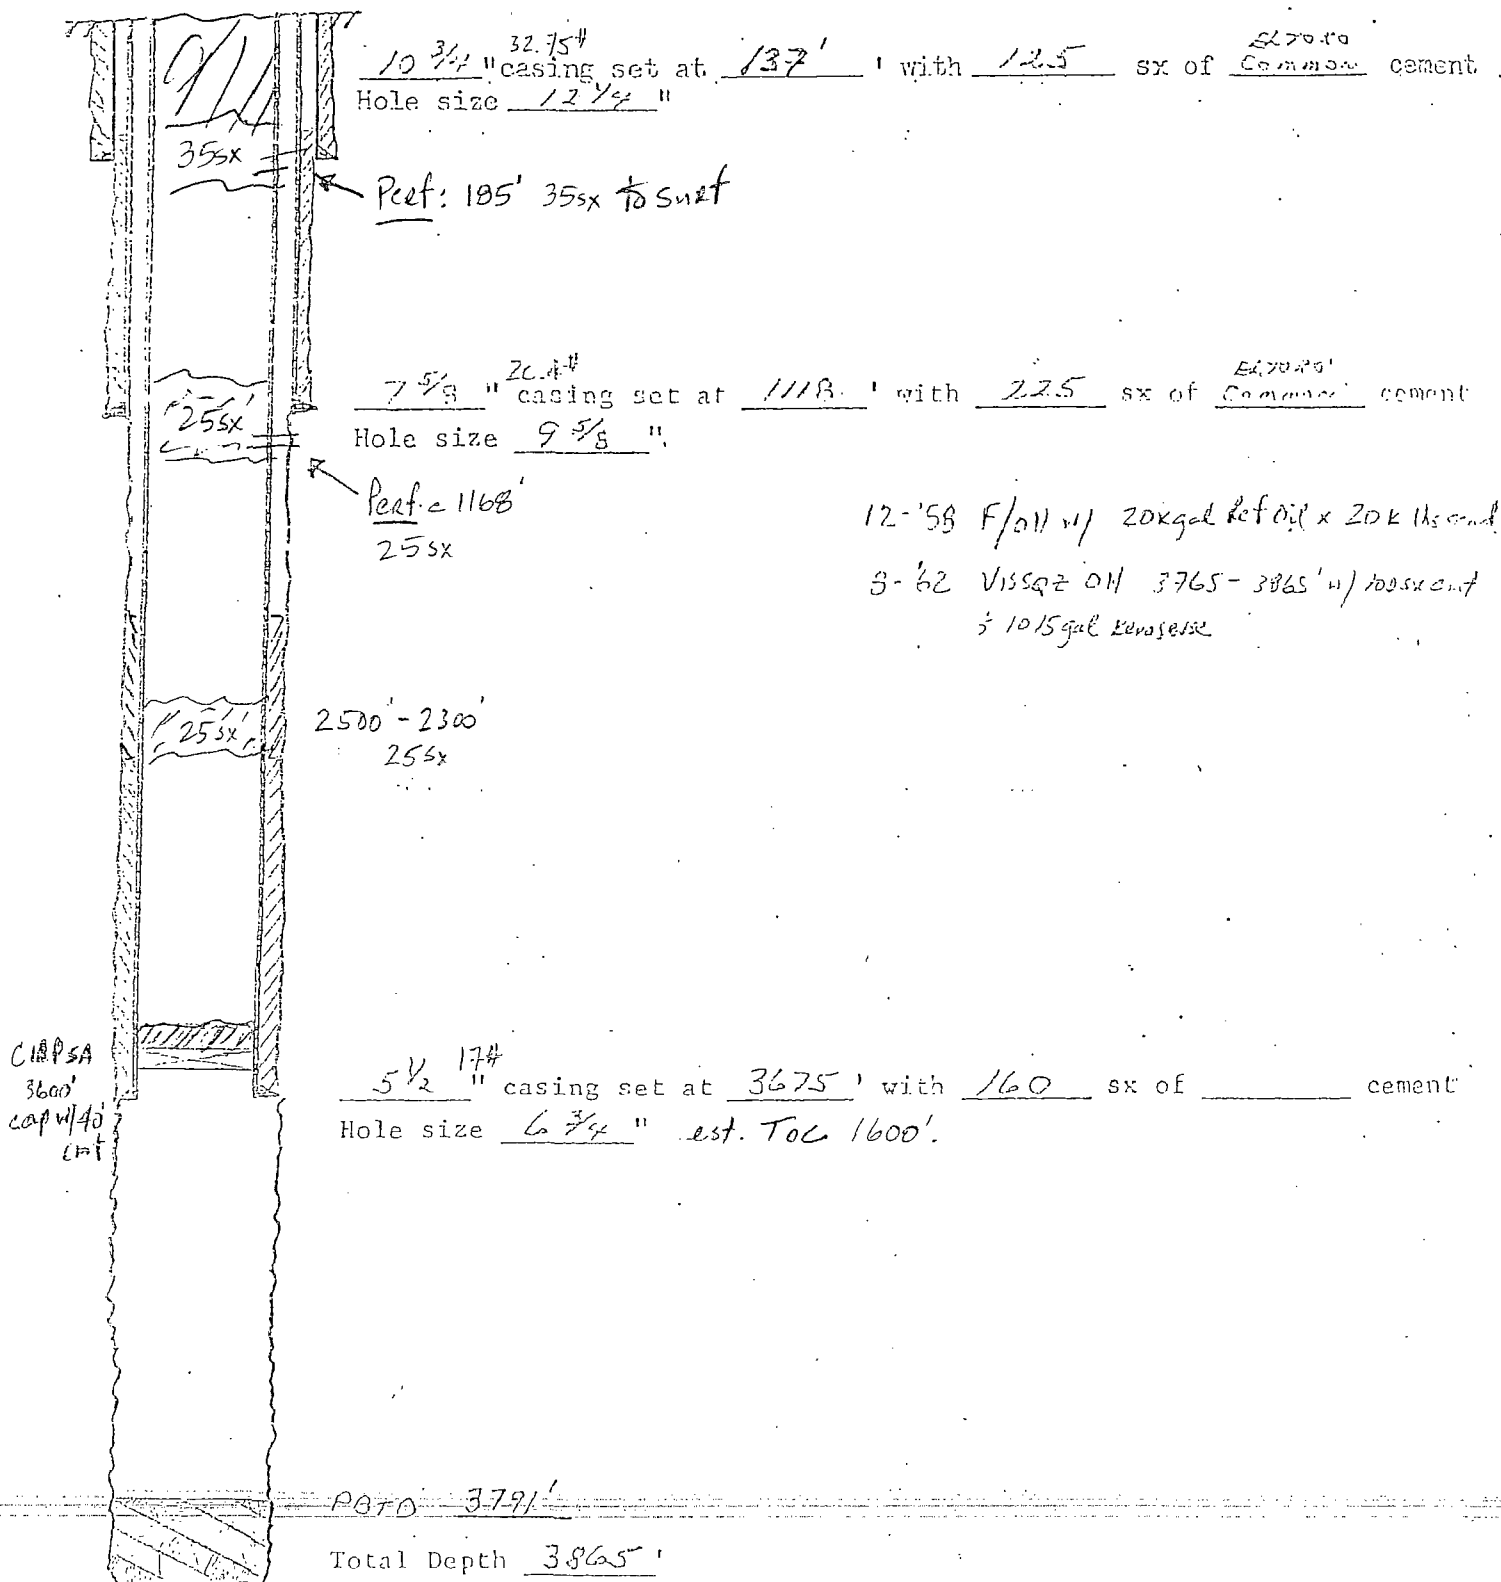

12-'58 F/OH w/ 20K gal Ref Oil x 20K lbs sand

8-'62 Vissqz OH 3765-3865' w/ 100sx cement
5 10/15 gal Kerosene