

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-41715
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name WEISSBEIR 23
8. Well Number 1H
9. OGRID Number 6137
10. Pool name or Wildcat HOBBS CHANNEL; BONE SPRING
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3755.2 KB; 3728.7' GL; 26.5' KB to GL

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Devon Energy Production Company, LP

3. Address of Operator
333 W. Sheridan Avenue, Oklahoma City, OK 73102

4. Well Location
Unit Letter O: 265 feet from the South line and 1350 feet from the East line
Section 14 Township 17S Range 37E NMPM Lea County, NM

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3755.2 KB; 3728.7' GL; 26.5' KB to GL

12. Check Appropriate Box to Indicate Nature of Notice. Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐ DOWNHOLE COMMINGLE ☐ CLOSED-LOOP SYSTEM ☐ OTHER: ☐	E-PERMITTING <SWD INJECTION> CONVERSION ☐ RBDMS ☐ RETURN TO ☐ TA ☐ CSNG ☐ ENVIRO ☐ CHG LOC ☐ INT TO P&A ☒ P&A NR ☐ P&A R ☐ OTHER: ☐
---	---

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU. POOH w/2-7/8" production tubing & ESP pump assembly from 8,600'.
2. Set CIBP @ 9,625'. Tag. Spot 30 sx (240') CI H on top @ 9,625' - 9,385'. (Open 2nd Bone Spring perfs from 9,675' to 14,150)
3. Spot 30 sx (190') CI C @ 7,250' - 7,060'. (Bone Spring top @ 7,239')
4. Spot 65 sx (410') CI C @ 4,060' - 3,650'. Tag TOC. (3,000' spacer; Yates @ 3,717')
5. Cut & pull 7" casing from 3,470'. Spot 55 sx (260') CI C @ 3,650' - 3,390'. Tag TOC. (B.Salt @ 3,512'; Stub @ 3,470')
6. Spot 65 sx (200') CI C @ 2,425' - 2,225'. Tag TOC. (T.Salt @ 2,418'; 13-3/8" shoe @ 2,275')
7. Spot 55 sx (170') CI C surface plug. (20" shoe @ 120')
8. Cut wellhead off. Set dry hole marker.

- 9# mud will be circulated between each plug.

The Oil Conservation Division

MUST BE NOTIFIED 24 Hours

Prior to the beginning of operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie Slack TITLE Production Technologist DATE 9-4-15

Type or print name Ronnie Slack E-mail address: Ronnie.Slack@dmn.com PHONE: 405-552-4615

For State Use Only


APPROVED BY: Mary Brown TITLE Dist. Supervisor DATE 9/10/2015

Conditions of Approval (if any)

SEP 09 2015

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: WEISSBEIR 23-1H		Field: WEIHEN	
Location: 265' FSL & 1350' FEL; SEC 14-T17S-R37E		County: LEA	State: NM
Elevation: 3755.2' KB; 3728.7' GL; 26.5' KB to GL		Spud Date: 10/7/14	Compl Date: 3/20/2015
API#: 30-025-41715	Prepared by: Ronnie Slack	Date: 9/2/15	Rev:

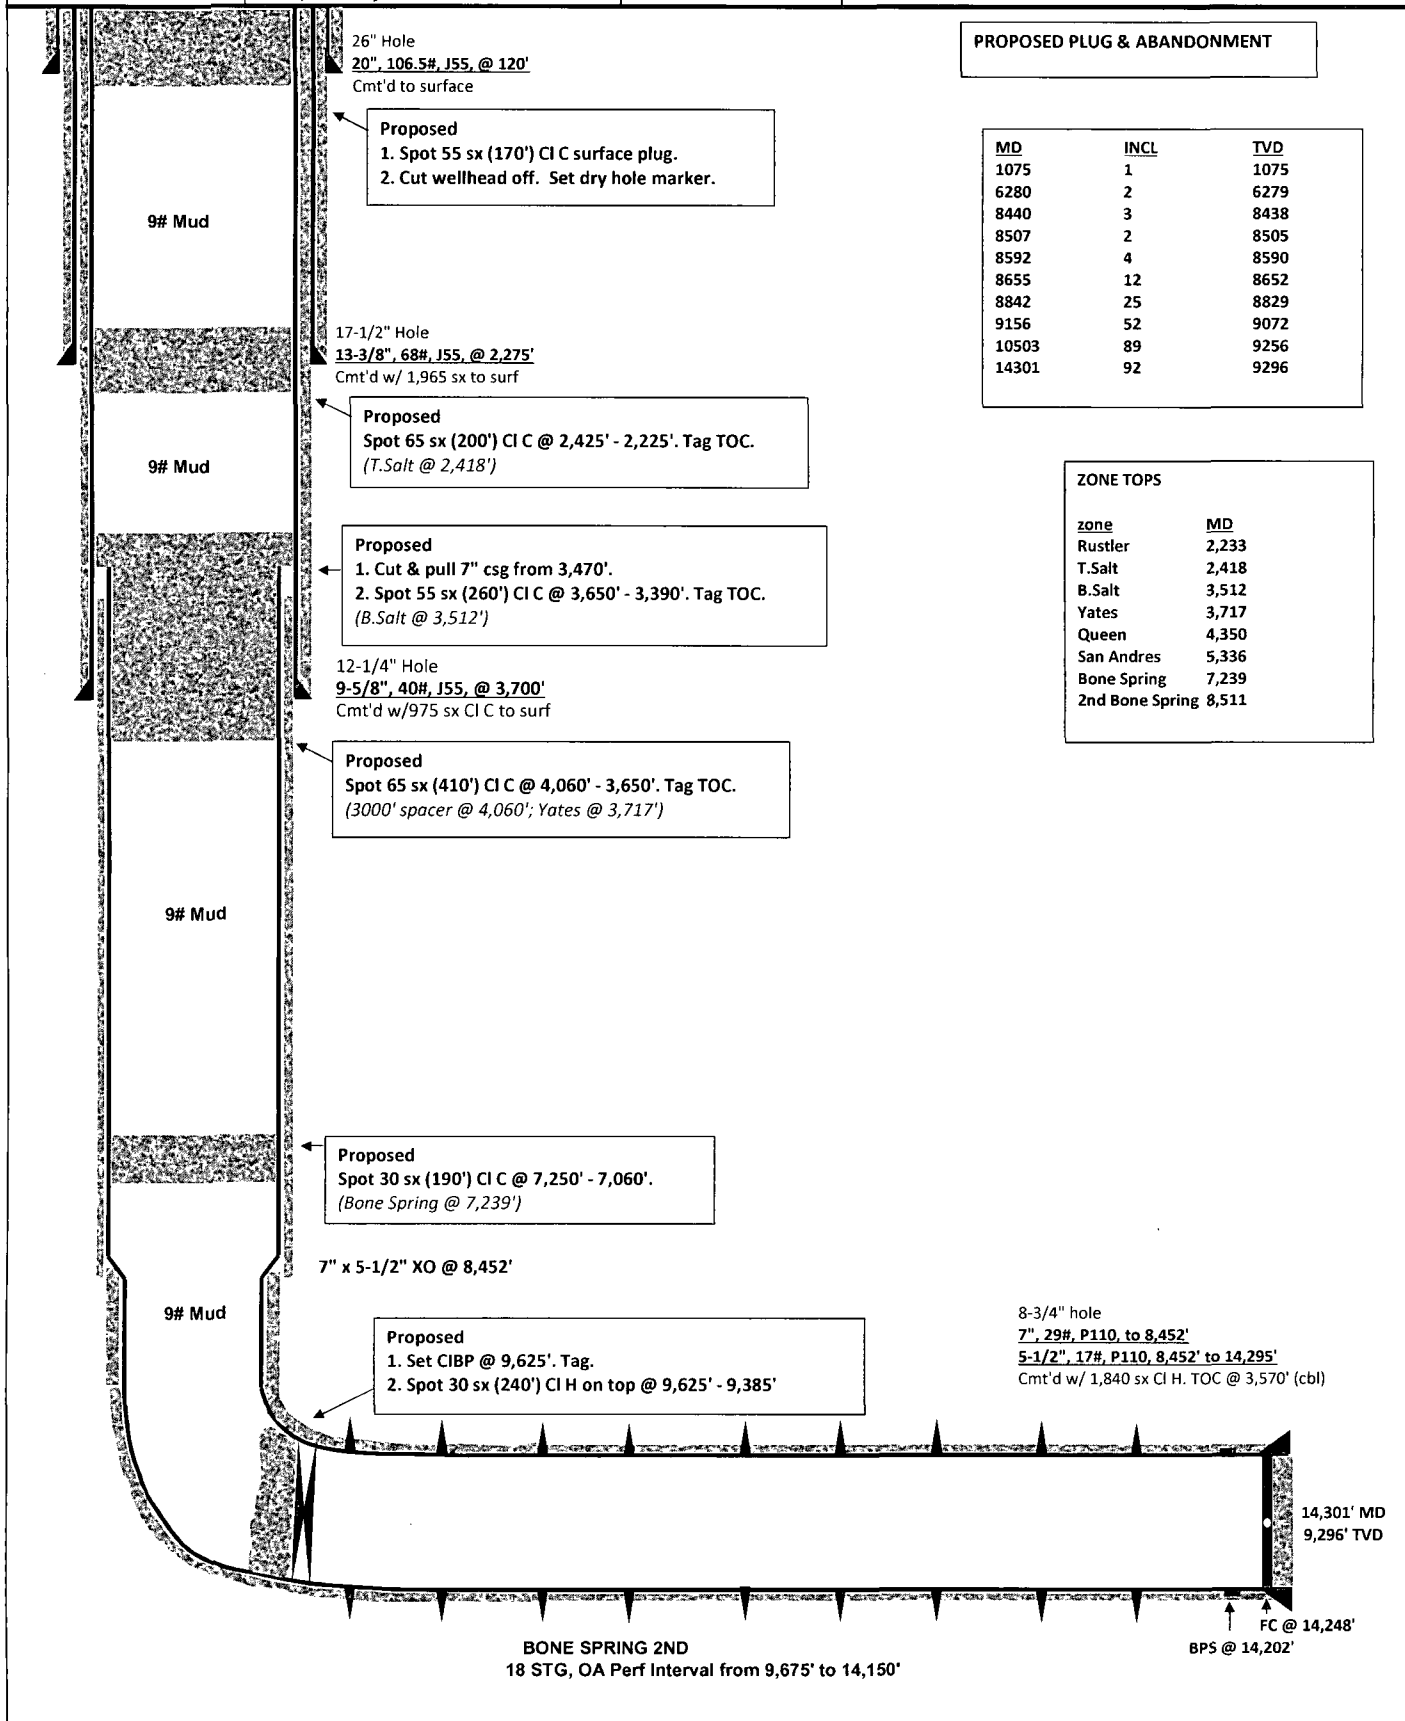

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: WEISSBEIR 23-1H		Field: WEIHEN	
Location: 265' FSL & 1350' FEL; SEC 14-T17S-R37E		County: LEA	State: NM
Elevation: 3755.2' KB; 3728.7' GL; 26.5' KB to GL		Spud Date: 10/7/14	Compl Date: 3/20/2015
API#: 30-025-41715	Prepared by: Ronnie Slack	Date: 5/20/14	Rev:

CURRENT WELLBORE SCHEMAT

MD	INCL	TVD
1075	1	1075
6280	2	6279
8440	3	8438
8507	2	8505
8592	4	8590
8655	12	8652
8842	25	8829
9156	52	9072
10503	89	9256
14301	92	9296

ZONE TOPS

zone	MD
Rustler	2,233
T.Salt	2,418
B.Salt	3,512
Yates	3,717
Queen	4,350
San Andres	5,336
Bone Spring	7,239
2nd Bone Spring	8,511

26" Hole
20", 106.5#, J55, @ 120'
Cmt'd to surface

17-1/2" Hole
13-3/8", 68#, J55, @ 2,275'
Cmt'd w/ 1,965 sx to surf

12-1/4" Hole
9-5/8", 40#, J55, @ 3,700'
Cmt'd w/ 975 sx CI C to surf

2-7/8", 6.5#, L80 production tubing to 8,153'

ESP pump assembly 8,153' to 8,273'

7" x 5-1/2" XO @ 8,452'

2-7/8", 6.5#, L80 production tubing 8,273' to 8,600'

8-3/4" hole
7", 29#, P110, to 8,452'
5-1/2", 17#, P110, 8,452' to 14,295'
Cmt'd w/ 1,840 sx CI H. TOC @ 3,570' (cbl)

14,301' MD
9,296' TVD

FC @ 14,248'
BPS @ 14,202'

BONE SPRING 2ND
18 STG, OA Perf Interval from 9,675' to 14,150'