

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-41716
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name WEISSBEIR 23
8. Well Number 2H
9. OGRID Number 6137
10. Pool name or Wildcat HOBBS CHANNEL; BONE SPRING
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3755.3 KB; 3728.8' GL; 26.5' KB to GL

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR TO GO BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Devon Energy Production Company, LP

3. Address of Operator
333 W. Sheridan Avenue, Oklahoma City, OK 73102

4. Well Location

Unit Letter P : 265 feet from the South line and 1300 feet from the East line
Section 14 Township 17S Range 37E NMPM Lea County, NM

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3755.3 KB; 3728.8' GL; 26.5' KB to GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

E-PERMITTING <SWD INJECTION>
CONVERSION RBDMS
RETURN TO TA
CSNG ENVIRO CHG LOC
INT TO P&A P&A NR P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU for P&A. Retrieve 5-1/2" packer from 8,048'. Retrieve 5-1/2" packer from 8,074'.
2. Set CIBP @ 9,050'. Tag. Spot 30 sx (240') Cl H on top @ 9,050' - 8,810'. (Open 2nd Bone Spring perfs from 9102' to 13,577')
3. Spot 30 sx (190') Cl C @ 7,100' - 6,910'. (Bone Spring top @ 7,080')
4. Spot 30 sx (190') Cl C @ 5,470' - 5,280'. Tag TOC. (9-5/8" shoe @ 5,420')
5. Spot 50 sx (315') Cl C @ 3,750' - 3,435'. Tag TOC. (Yates @ 3,715'; B. Salt @ 3,512')
6. Cut & pull 7" casing from 2,900'. Spot 35 sx (130') Cl C @ 2,950' - 2,820'. Tag TOC. (7" stub @ 2,900')
7. Spot 75 sx (230') Cl C @ 2,450' - 2,220'. Tag TOC. (T. Salt @ 2,418'; 13-3/8" shoe @ 2,276')
8. Spot 55 sx (170') Cl C surface plug. (20" shoe @ 120')
9. Cut wellhead off. Set dry hole marker.

- 9# mud will be circulated between each plug.

The Oil Conservation Division

MUST BE NOTIFIED 24 Hours

Prior to the beginning of operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie Slack TITLE Production Technologist DATE 9-4-15

Type or print name Ronnie Slack E-mail address: Ronnie.Slack@dmn.com PHONE: 405-552-4615

For State Use Only


APPROVED BY: Malyn Brown TITLE Dist Supervisor DATE 9/10/2015

Conditions of Approval (if any)

SEP 09 2015

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: WEISSBEIR 23-2H	Field: WEIHEN	
Location: 265' FSL & 1300' FEL; SEC 14-T17S-R37E	County: LEA	State: NM
Elevation: 3755.3' KB; 3728.8' GL; 26.5' KB to GL	Spud Date: 11/11/14	Compl Date:
API#: 30-025-41716	Prepared by: Ronnie Slack	Date: 9/4/15
		Rev:

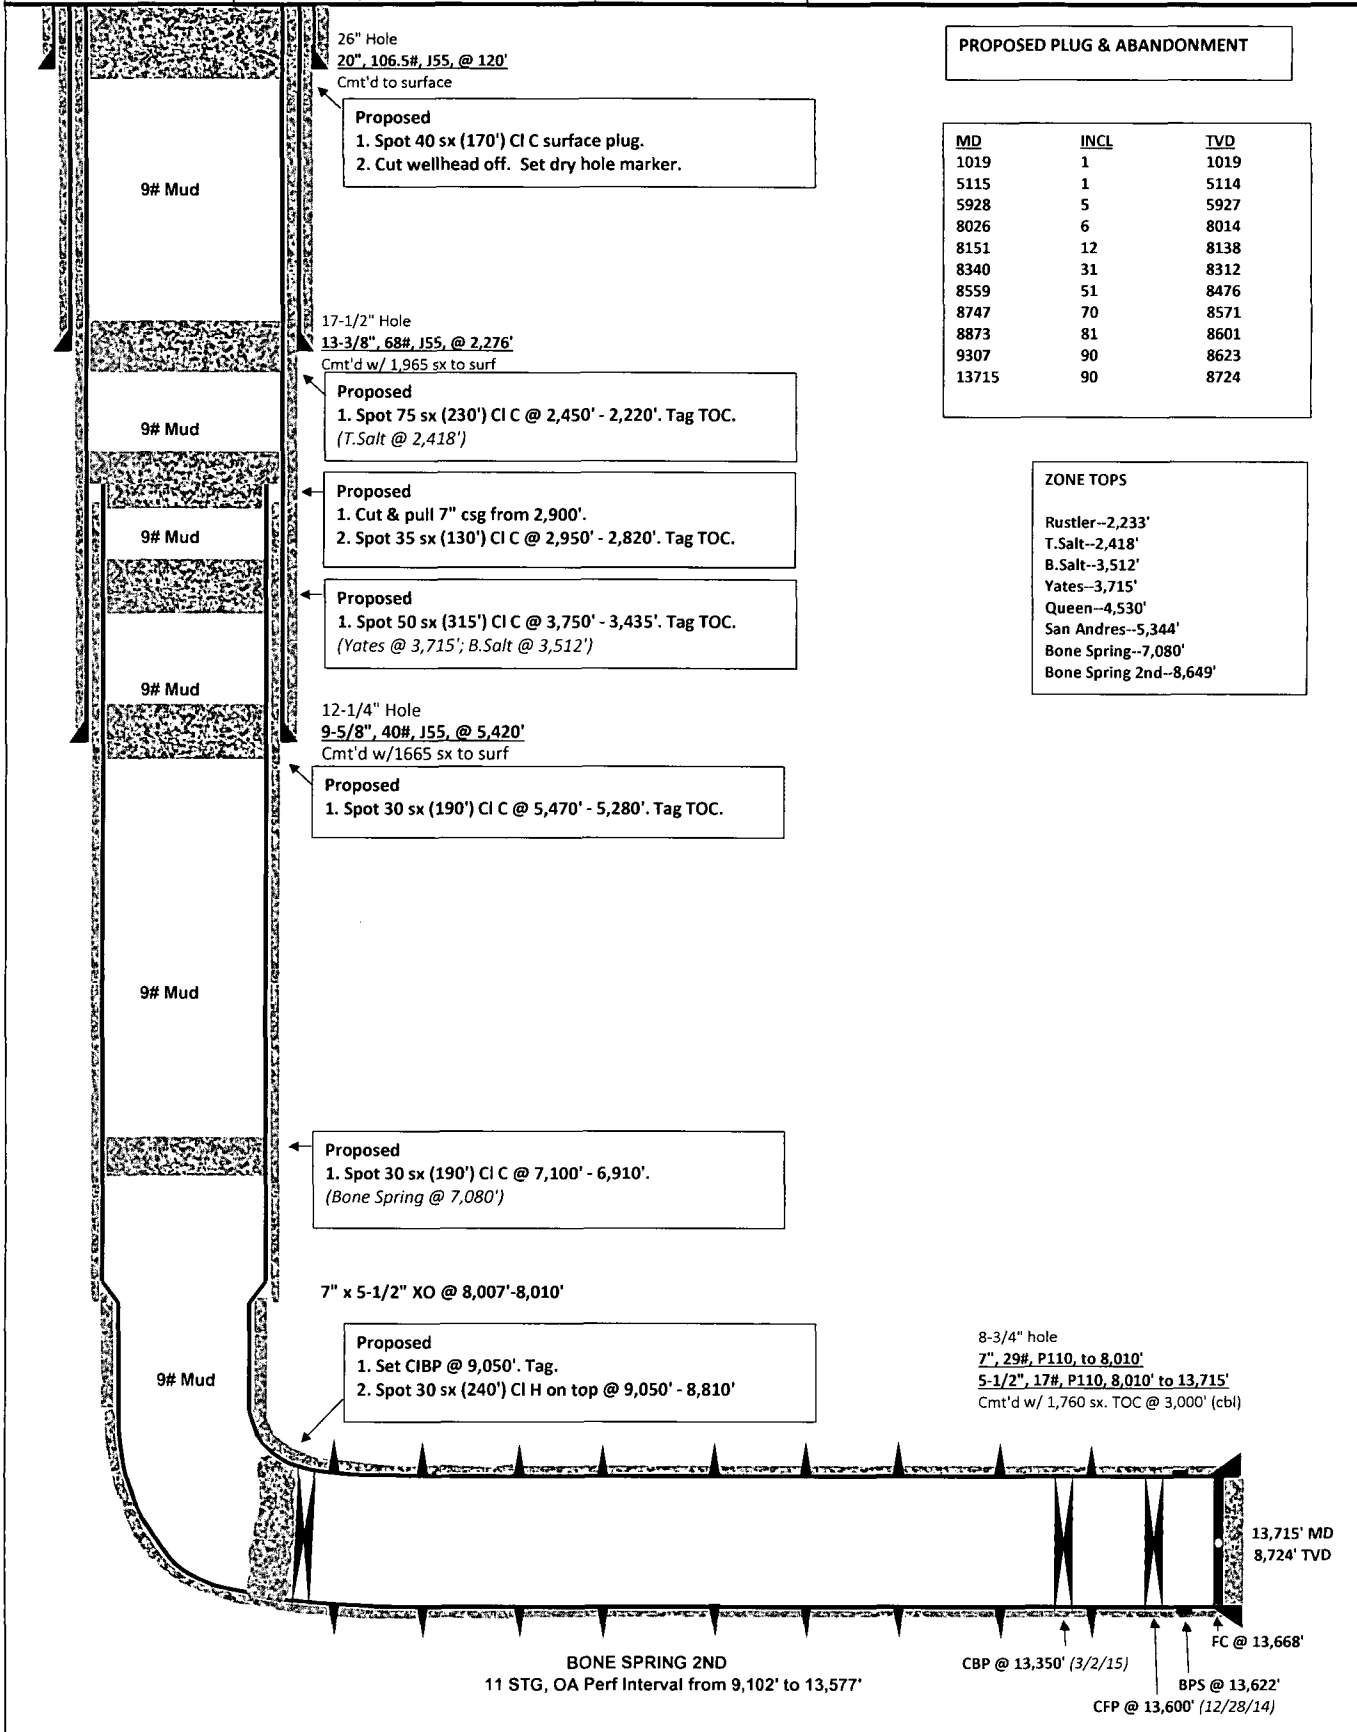

PROPOSED PLUG & ABANDONMENT

MD	INCL	TVD
1019	1	1019
5115	1	5114
5928	5	5927
8026	6	8014
8151	12	8138
8340	31	8312
8559	51	8476
8747	70	8571
8873	81	8601
9307	90	8623
13715	90	8724

ZONE TOPS

Rustler--2,233'
 T.Salt--2,418'
 B.Salt--3,512'
 Yates--3,715'
 Queen--4,530'
 San Andres--5,344'
 Bone Spring--7,080'
 Bone Spring 2nd--8,649'

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: WEISSBEIR 23-2H		Field: WEIHEN	
Location: 265' FSL & 1300' FEL; SEC 14-T17S-R37E		County: LEA	State: NM
Elevation: 3755.3' KB; 3728.8' GL; 26.5' KB to GL		Spud Date: 11/11/14	Compl Date:
API#: 30-025-41716	Prepared by: Ronnie Slack	Date: 8/7/15	Rev:

CURRENT WELLBORE SCHEMAT

MD	INCL	TVD
1019	1	1019
5115	1	5114
5928	5	5927
8026	6	8014
8151	12	8138
8340	31	8312
8559	51	8476
8747	70	8571
8873	81	8601
9307	90	8623
13715	90	8724

ZONE TOPS

Rustler--2,233'
 T.Salt--2,418'
 B.Salt--3,512'
 Yates--3,715'
 Queen--4,530'
 San Andres--5,344'
 Bone Spring--7,080'
 Bone Spring 2nd--8,649'

26" Hole
 20", 106.5#, J55, @ 120'
 Cmt'd to surface

17-1/2" Hole
 13-3/8", 68#, J55, @ 2,276'
 Cmt'd w/ 1,965 sx to surf

12-1/4" Hole
 9-5/8", 40#, J55, @ 5,420'
 Cmt'd w/1665 sx to surf

7" x 5-1/2" XO @ 8,007'-8,010'

5-1/2, ASIX Pkr @ 8,048' (5/23/15)

5-1/2, ASIX Pkr @ 8,074', w/2.25 profile, 6' pup w/pump out plug (5/21/15)

8-3/4" hole
 7", 29#, P110, to 8,010'
 5-1/2", 17#, P110, 8,010' to 13,715'
 Cmt'd w/ 1,760 sx. TOC @ 3,000' (cbl)

13,715' MD
 8,724' TVD

BONE SPRING 2ND
 11 STG, OA Perf Interval from 9,102' to 13,577'

CBP @ 13,350' (3/2/15)

BPS @ 13,622'

CFP @ 13,600' (12/28/14)

FC @ 13,668'