Form 3160-5
(June 1990)

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
   Oil ☐ Well   Gas ☒ Well   ☐ Other

2. Name of Operator
   SAMSON RESOURCES

3. Address and Telephone No.
   TWO WEST SECOND STREET, TULSA, OK 74103-3103   (918) 583-1791

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
   ꭍ
   Surface: 1,980' FSL & 1,980' FEL, Sec 15-20S-33E

FORM APPROVED
Budget Bureau No. 1004-0135

5. Lease Designation and Serial No.
   NM-13279

6. If Indian, Allottee or Tribe Name
   N/A

7. If Unit or CA, Agreement Designation
   N/A

8. Well Name and No.
   Bandit 15 Federal Com #2

9. API Well No.
   30-025-37231

10. Field and Pool, or Exploratory Area
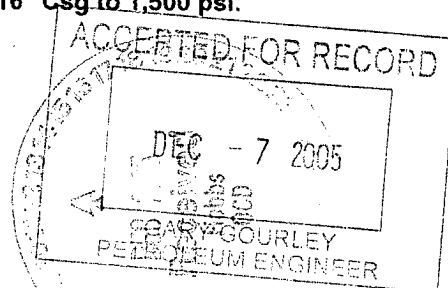
11. County or Parish, State
    Lea, NM

12   **CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION	
☐ Notice of Intent	☐ Abandonment	☐ Change of Plans
	☐ Recompletion	☐ New Construction
☒ Subsequent Report	☐ Plugging Back	☐ Non-Routine Fracturing
	☐ Casing Repair	☐ Water Shut-Off
☐ Final Abandonment Notice	☐ Altering Casing	☐ Conversion to Injection
	☒ Other **Spud Well and Run and Cement Surface Casing**	☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13   Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

11/23/2005 01:30 Spud Well. 11/25/2005 Notified Pat Hutchings/BLM of intent to set and cement surface casing. Set 16" 75# J-55 BT&C casing at 1,454'. Cemented with 840 sacks of HLC Prem Plus w/ 2% CaCl2 mixed @ 14.8 ppg. Circulated 365 sacks to surface. 11/27/2005 Tested 16" Csg to 1,500 psi.

ACCEPTED FOR RECORD
DEC - 7 2005
GARY GOURLEY
PETROLEUM ENGINEER

14. I hereby certify that the foregoing is true and correct
    Signed _____ **Todd Wiley**   Title **Drilling Engineer**   Date **November 28, 2005**

(This space for Federal or State office use)
    Approved by _____   Title _____   Date _____
    Conditions of approval, if any:

*See Instruction on Reverse Side