Form 3160-5 (August 1999)

13.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD-HOBBS

FORM APPROVED OMB NO. 1004-0135 Expires: November 30, 2000

5. Lease Serial No.

LC-031736 /Y//

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an

6. If Indian, Allottee or Tribe Name abandoned well. Use Form 3160-3 (APD) for such proposals. SUBMIT IN TRIPLICATE - Other instructions on reverse side 7. If Unit or CA/Agreement, Name and/or No. Type of Well Oil Well X Gas Well Other 8. Well Name and No. Gillully Federal 2. Name of Operator Gas Com Occidental Permian Ltd. 157984 9. API Well No. 3a. Address 3b. Phone No. (include area code) 30-025-04310 P.O. Box 50250. Midland. TX 79710-0250 <u>432-685-5717</u> 10. Field and Pool, or Exploratory Area 4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Eumont Yates-SR-On 660 FSL 1980 FEL SWSE(0) Sec 24 T20S R36E 11. County or Parish, State 12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION X Notice of Intent Acidize Deepen Production (Start/Resume) Water Shut-Off Alter Casing Fracture Treat Reclamation Well Integrity Subsequent Report Casing Repair New Construction Recomplete Other Change Plans Plug and Abandon Temporarily Abandon Final Abandonment Notice Convert to Injection Water Disposal Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion on recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.) TD - 3858' PBTD - 3650' PERFS - 2683-3613' 13-3/8" 40# @ 298', 17-1/2", cmt w/200sx, TOC-Surf-Calc 9-5/8" 36# @ 2515', 12-1/4", cmt w/600sx. TOC-Surf-Calc 7" 22# @ 3750', 8-3/4", cmt w/300sx, TOC-1500'-Calc 5/71-Sqz OH w/ 325sx cmt, Perf @ 3686-3733' 10/74-CIBP @ 3650' Sqz 200sx cmt @ 2683-2685', Perf 2683-3613' RIH & Tag CIBP @ 3650', dump 8sx cmt 1. 2. RIH & Set CIBP @ 2633', dump 8sx cmt 3. M&P 25sx cmt @ 2565-2465 4. Perf @ 1200', sqz 45sx cmt to 1100' WOC-Tag 5. Perf @ 348', sqz 45sx cmt to 248' M&P 15sx cmt Surface Plug 10# MLF BETWEEN PLUGS I hereby certify that the foregoing is true and correct Name (Printed/Typed) Title David Stewart Sr. Regulatory Analyst Date

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by SEER SGD. DAVID R. GLASS

JAN 112006

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

SEE ATTACHED FOR

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and will the make to any department of seems will the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

Ocidental Permian LP Gillully Federal Gas Com #7 API No. 30-025-04310

15sx Surface

45sx @ 348-248'


45sx @ 1200-1100' WOC-Tag

THE PRINTS 2 SH

25sx @ 2565-2465'

CIBP @ 2633' w/ 8sx cmt

Tag CIBP & Spot 8sx cmt 10/74-CIBP @ 3650'

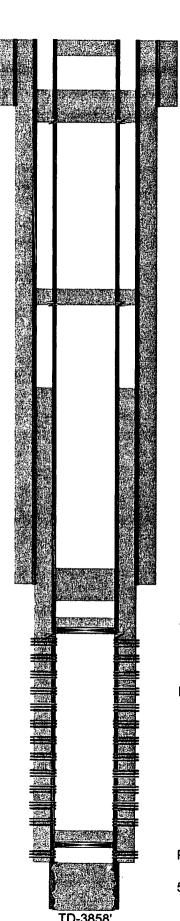

17-1/2" hole @ 298' 13-3/8" csg @ 298' w/200sx-TOC-Surf-Calc

Perf @ 348'

Perf @ 1200'

12-1/4" hole @ 2515' 9-5/8" csg @ 2515' w/600sx-TOC-Surf-Calc

10/74-Perf & Sqz 200sx cmt @ 2683-2685'

Perfs @ 2683-3613'

8-3/4" hole @ 3858' 7" csg @ 3750' w/300sx-TOC-1554'-Calc

Perf @ 3686-3733'

5/71-Sqz OH w/ 325sx cmt