

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-28067
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name LANGLIE "A" STATE
8. Well Number 003
9. OGRID Number 162683
10. Pool name or Wildcat JALMAT (GAS)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well ☒ Other

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location

Unit Letter I : 1980 feet from the SOUTH line and 330 feet from the EAST line
Section 36 Township 24S Range 36E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,254' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

REM E-PERMITTING <SWD INJECTION>
COI CONVERSION RBDMS
CAS RETURN TO TA
CSNG ENVIRO CHG LOC
INT TO P&A NR P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 7" CIBP @ 2,750'; PUMP 50 SXS. CMT. @ 2,750'-2580' (T/YATES, B/SALT); WOC X TAG CMT. PLUG.
- 2) CIRC. WELL W/ PXA FLUID; PRES. TEST 5-1/2" CSG. TO 500#.
- 3) PUMP 60 SXS. CMT. @ 1,262'-1,060' (T/SALT, T/ANHY.); WOC X TAG CMT. PLUG.
- 4) MIX X CIRC. TO SURF. 100 SXS. CMT. @ 451'-3' (9-5/8" CSG.SHOE).
- 5) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyer TITLE: AGENT

DATE: 11/05/15

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033

For State Use Only

APPROVED BY: Mark Whitaker TITLE: Compliance Officer DATE: 11/12/2015

Conditions of Approval (if any):

NOV 18 2015



Cimarex Energy Co. of Colorado

LANGLIE "A" STATE #3

1980' FSL & 330' FEL

Sec. 36, T-24-S, R-36E, Lea Co., NM


J PIWETZ

11/3/2015

API #30-025-28067

Spudded: 12/8/1982

Original Operator: Doyle Hartman

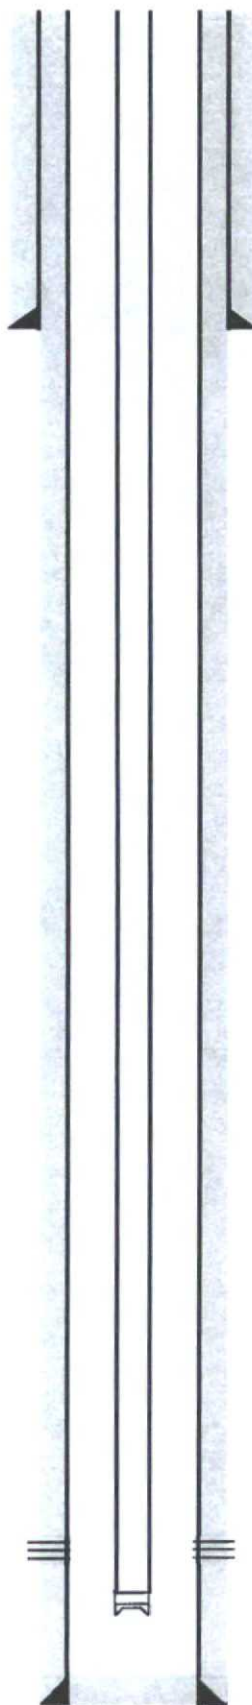

9 5/8", csg @ 401'
cmdt w/ 250 sx, Circulated

No tubing data available

Tbg Detail

KB - 10'

92 jts 2 3/8" J55 tbg 2892.45'

2 3/8" X 7" TAC, 3.15'

2 3/8" SN, 1.10'

2 3/8" X 4' pref sub, 4.00'

2 3/8" mud jt./ OE, 31.30'

ROD DETAIL

1-1/2" X 16' Flakeline PR	1
3/4" rods	109
1 1/2" sinker bars	4
Right hand release tool	1
2" X 1 1/4" X 16' RHAC	1
w/ 6' gas anchor	

T. ANHY 1110'

2,785' - 2,877'

7", ?# @ 3367' cmdt w/ 675 sx

23

circ.

PBTD @ 3039'
TD @ 3367'

NOTE: No well files exist for this well, all
information taken from ODC reports and may
not reflect actual existing well conditions

J PIWETZ 11/3/2015

Spudded: 12/8/1982
Original Operator: Doyle Hartman

Cimarex Energy Co. of Colorado


LANGLIE "A" STATE #3

1980' FSL & 330' FEL

Sec. 36, T-24-S, R-36E, Lea Co., NM

J PIWETZ 30-025-28067 11/3/2015

T/ANHY. ~ 1,110'
T/SALT ~ 1,212'
B/SALT ~ 2,630'
T/YAES ~ 2,783'
T/7-R ~ 2,992'

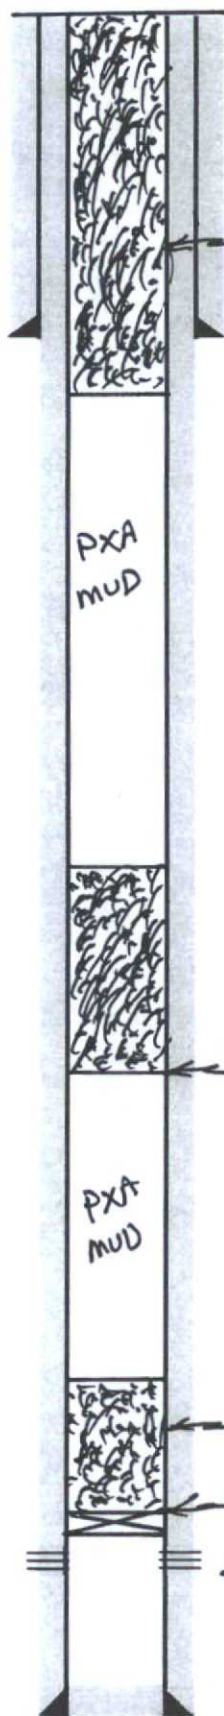

CDRC. 100 SXS. @ 451'-3'

9 5/8", csg @ 401'
cmtd w/ 250 sx, Circulated

PXA
MUD

PXA
MUD

Pump 6D SXS. @ 1262'-1060'-TAG

Pump. 5D SXS. @ 2750'-2580'-TAG

SET 7" CBP @ 2750'

2,785'-2,877'

7", ?# @ 3367' cmtd w/ 675 sx

PBTD @ 3039'
TD @ 3367'

NOTE: No well files exist for this well, all
information taken from ODC reports and may
not reflect actual existing well conditions

J PIWETZ 11/3/2015

DtE 11/05/15