

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.

30-025-32394

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☒ Brine

2. Name of Operator

Basic Energy Services

3. Address of Operator

P.O. Box 10460 Midland, TX 79702

4. Well Location

Unit Letter A : 1305 feet from the North line and 60 feet from the East line
Section 20 Township 25 S Range 37 E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3073' GL

Lease Name or Unit Agreement Name

Salado Brine Well

8. Well Number

002

9. OGRID Number

246368

10. Pool name or Wildcat

BSW: Salado

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

CIBP

- MIRU - RIH WL - Set CIBP at 1,050' - ~~Set 200sx cmt under CIBP~~
- Pump 180sx cmt @ 1,050' to surface
- Cut and Cap - Install dry hole marker

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE P&A Tech DATE 12/17/15

Type or print name Greg Bryant E-mail address: PHONE:

For State Use Only

APPROVED BY: [Signature] TITLE Compliance Officer DATE 12/22/2015

Conditions of Approval (if any):

DEC 31 2015 1/4/16

Basic Energy Services

SALADO BRINE 23W-025

Unit A W-1305-F North 160th East, Sec 20, T25N, R37E, MFL #3000554239, Leake County, IN

Current 8/14/14

14 3/4" Hole
10" csg. @ 60'
30 sks class (C) to Surf..

9 7/8" Hole
7" csg. @ 1100' per 6/16/09 Log
475 sks class C to Surf.

6 1/8" Open Hole
down to 1420'

8/13/14 Extracted & LD 40 jnts 2 7/8 J-55 tubing

TD @ 1650'

0 - 1'	Top soil
1 - 12'	Broken cliché
12 - 15'	Granite
15 - 40'	Red sand
40 - 60'	Gray & red shale
60 - 120'	Red bed
120 - 130'	Blue shale
130 - 137'	Brown lime
137 - 145'	Red & brown rock - hard
145 - 165'	Gray shale
165 - 175'	Red bed
175 - 205'	Brown shale w / streaks of gray
205 - 325'	Red bed
325 - 340'	Brown lime, medium
340 - 355'	Red sand & water
355 - 485'	Hard red sandy shale
485 - 495'	Red rock
495 - 525'	Brown sand & water
525 - 580'	Red bed
580 - 600'	Red rock
600 - 675'	Red bed
675 - 1025'	Red rock & anhydrite
1025 - 1080'	Gray lime
1080 - 1095'	Anhydrite
1095 - 1125'	Red sand
1125 - 1140'	Gray lime
1140 - 1185'	Salt & anhydrite
1185 - 1230'	Blue shale
1230 - 1240'	Anhydrite & potash, some salt
1240 - 1400'	Salt

Basic Energy Services

SALADO BRINE 162 BW 1025

Wellbore: 1305 ft North 60th East Sec 20 T125 S R37 E API # 40-02532394 SLEBa County NM


Current 8/14/14

14 3/4" Hole
10" csg. @ 60'
30 sks class (C) to Surf..

Spot 1805x@1050'-3'

9 7/8" Hole
7" csg. @ 1100' per 6/16/09 Log
475 sks class C to Surf.

6 1/8" Open Hole
down to 1420'

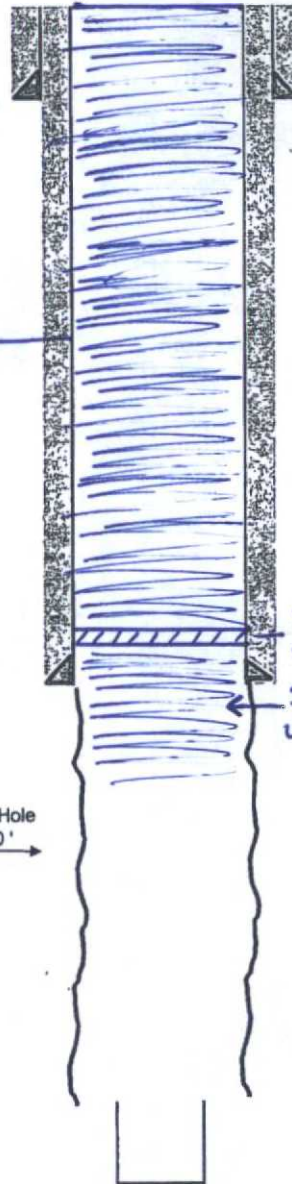

0 - 1'	Top soil
1 - 12'	Broken cliché
12 - 15'	Granite
15 - 40'	Red sand
40 - 60'	Gray & red shale
60 - 120'	Red bed
120 - 130'	Blue shale
130 - 137'	Brown lime
137 - 145'	Red & brown rock - hard
145 - 165'	Gray shale
165 - 175'	Red bed
175 - 205'	Brown shale w / streaks of gray
205 - 325'	Red bed
325 - 340'	Brown lime, medium
340 - 355'	Red sand & water
355 - 485'	Hard red sandy shale
485 - 495'	Red rock
495 - 525'	Brown sand & water
525 - 580'	Red bed
580 - 600'	Red rock
600 - 675'	Red bed
675 - 1025'	Red rock & anhydrite
1025 - 1080'	Gray lime
1080 - 1095'	Anhydrite
1095 - 1125'	Red sand
1125 - 1140'	Gray lime
1140 - 1185'	Salt & anhydrite
1185 - 1230'	Blue shale
1230 - 1240'	Anhydrite & potash, some salt
1240 - 1400'	Salt

Set C1CR

@ 1050'

S92 2005x
under CR

8/13/14 Extracted & LD 40 jnts 2 7/8 J-55 tubing

TD @ 1650'