

Drilling 12-1/4" hole
below 13 3/8" Casing


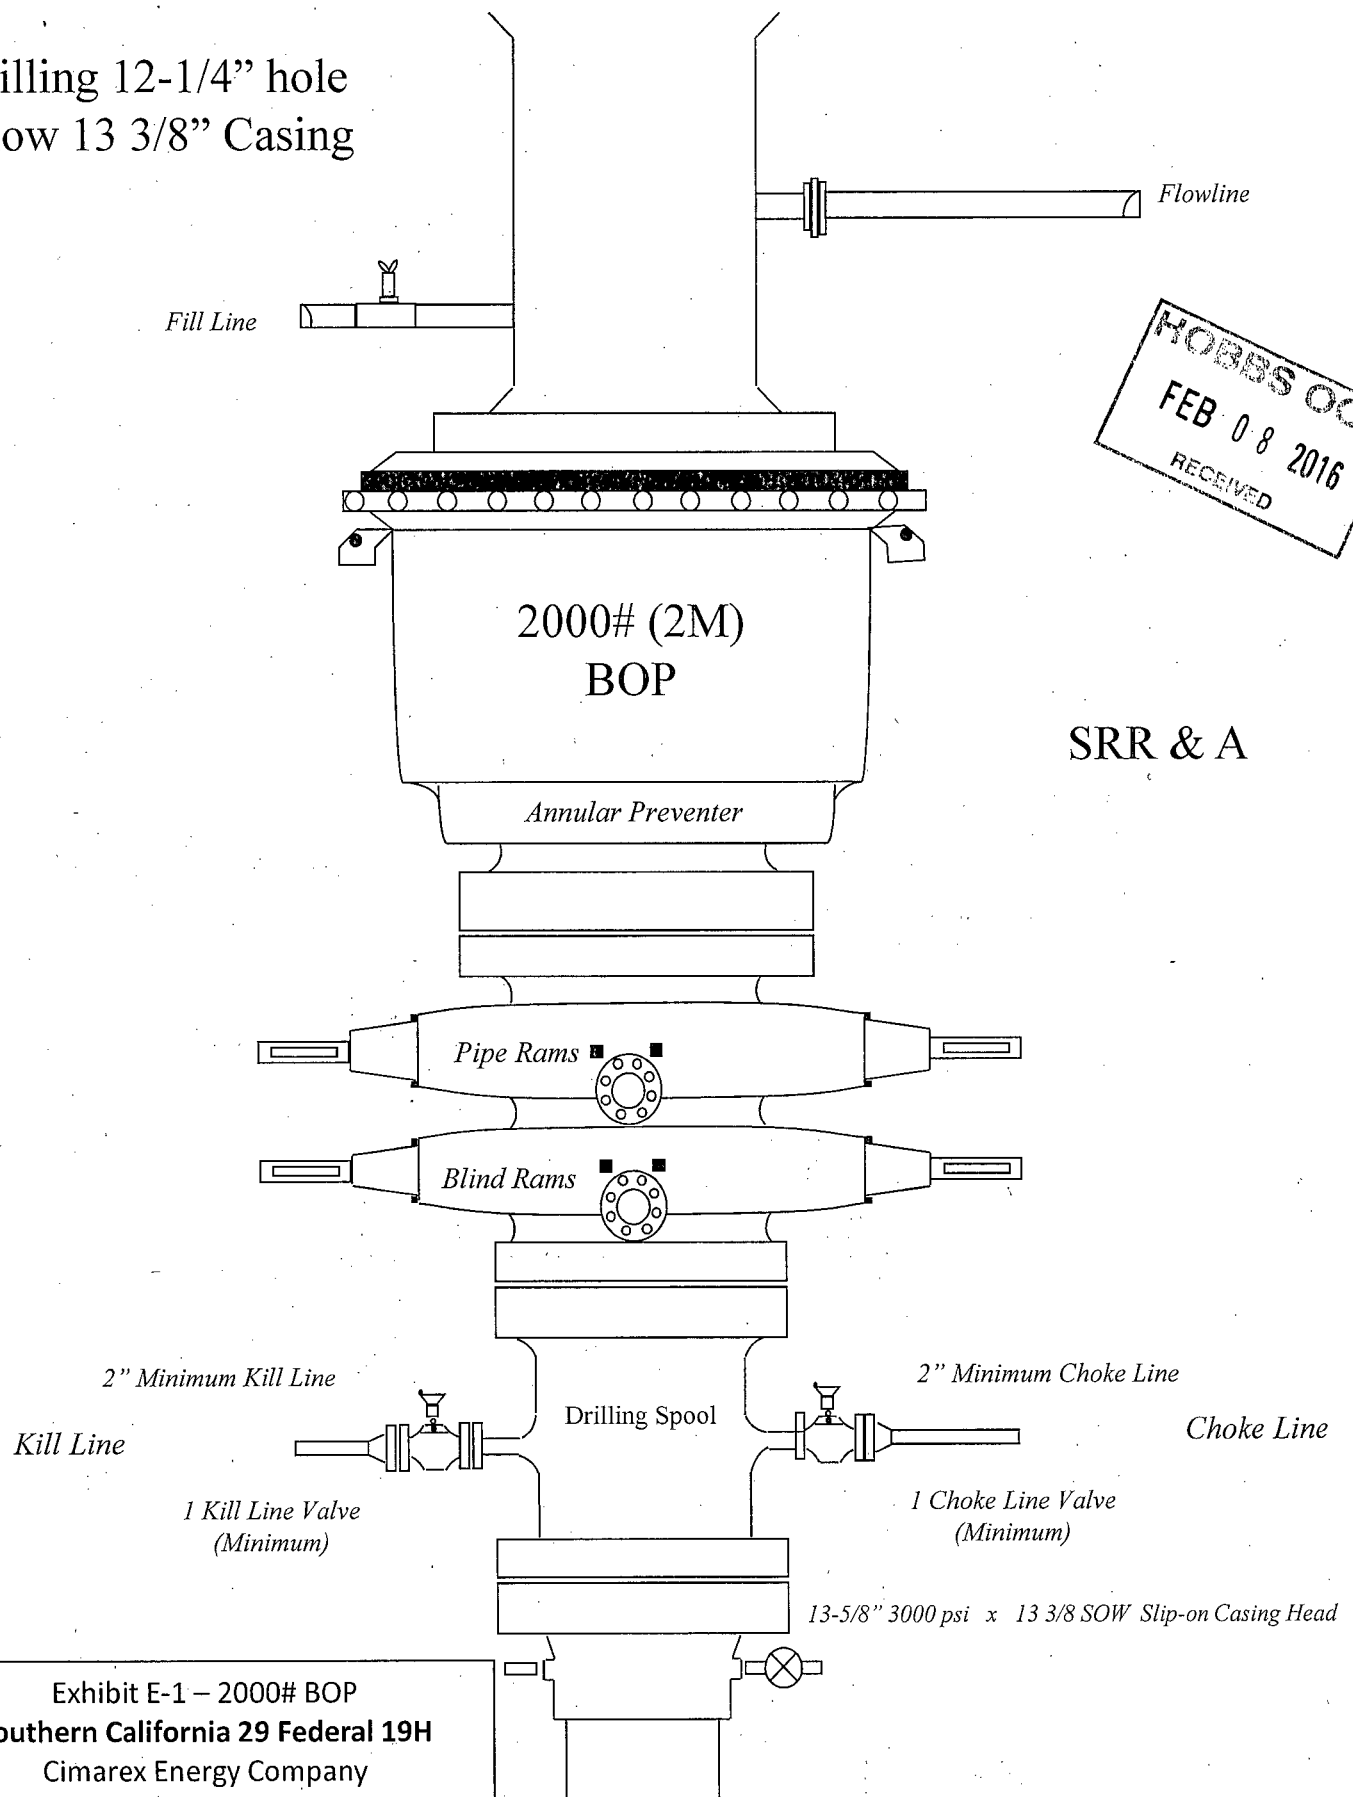


Exhibit E-1 – 2000# BOP
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM

FEB 11 2016

Drilling 8-3/4" hole
below 9 5/8" Casing

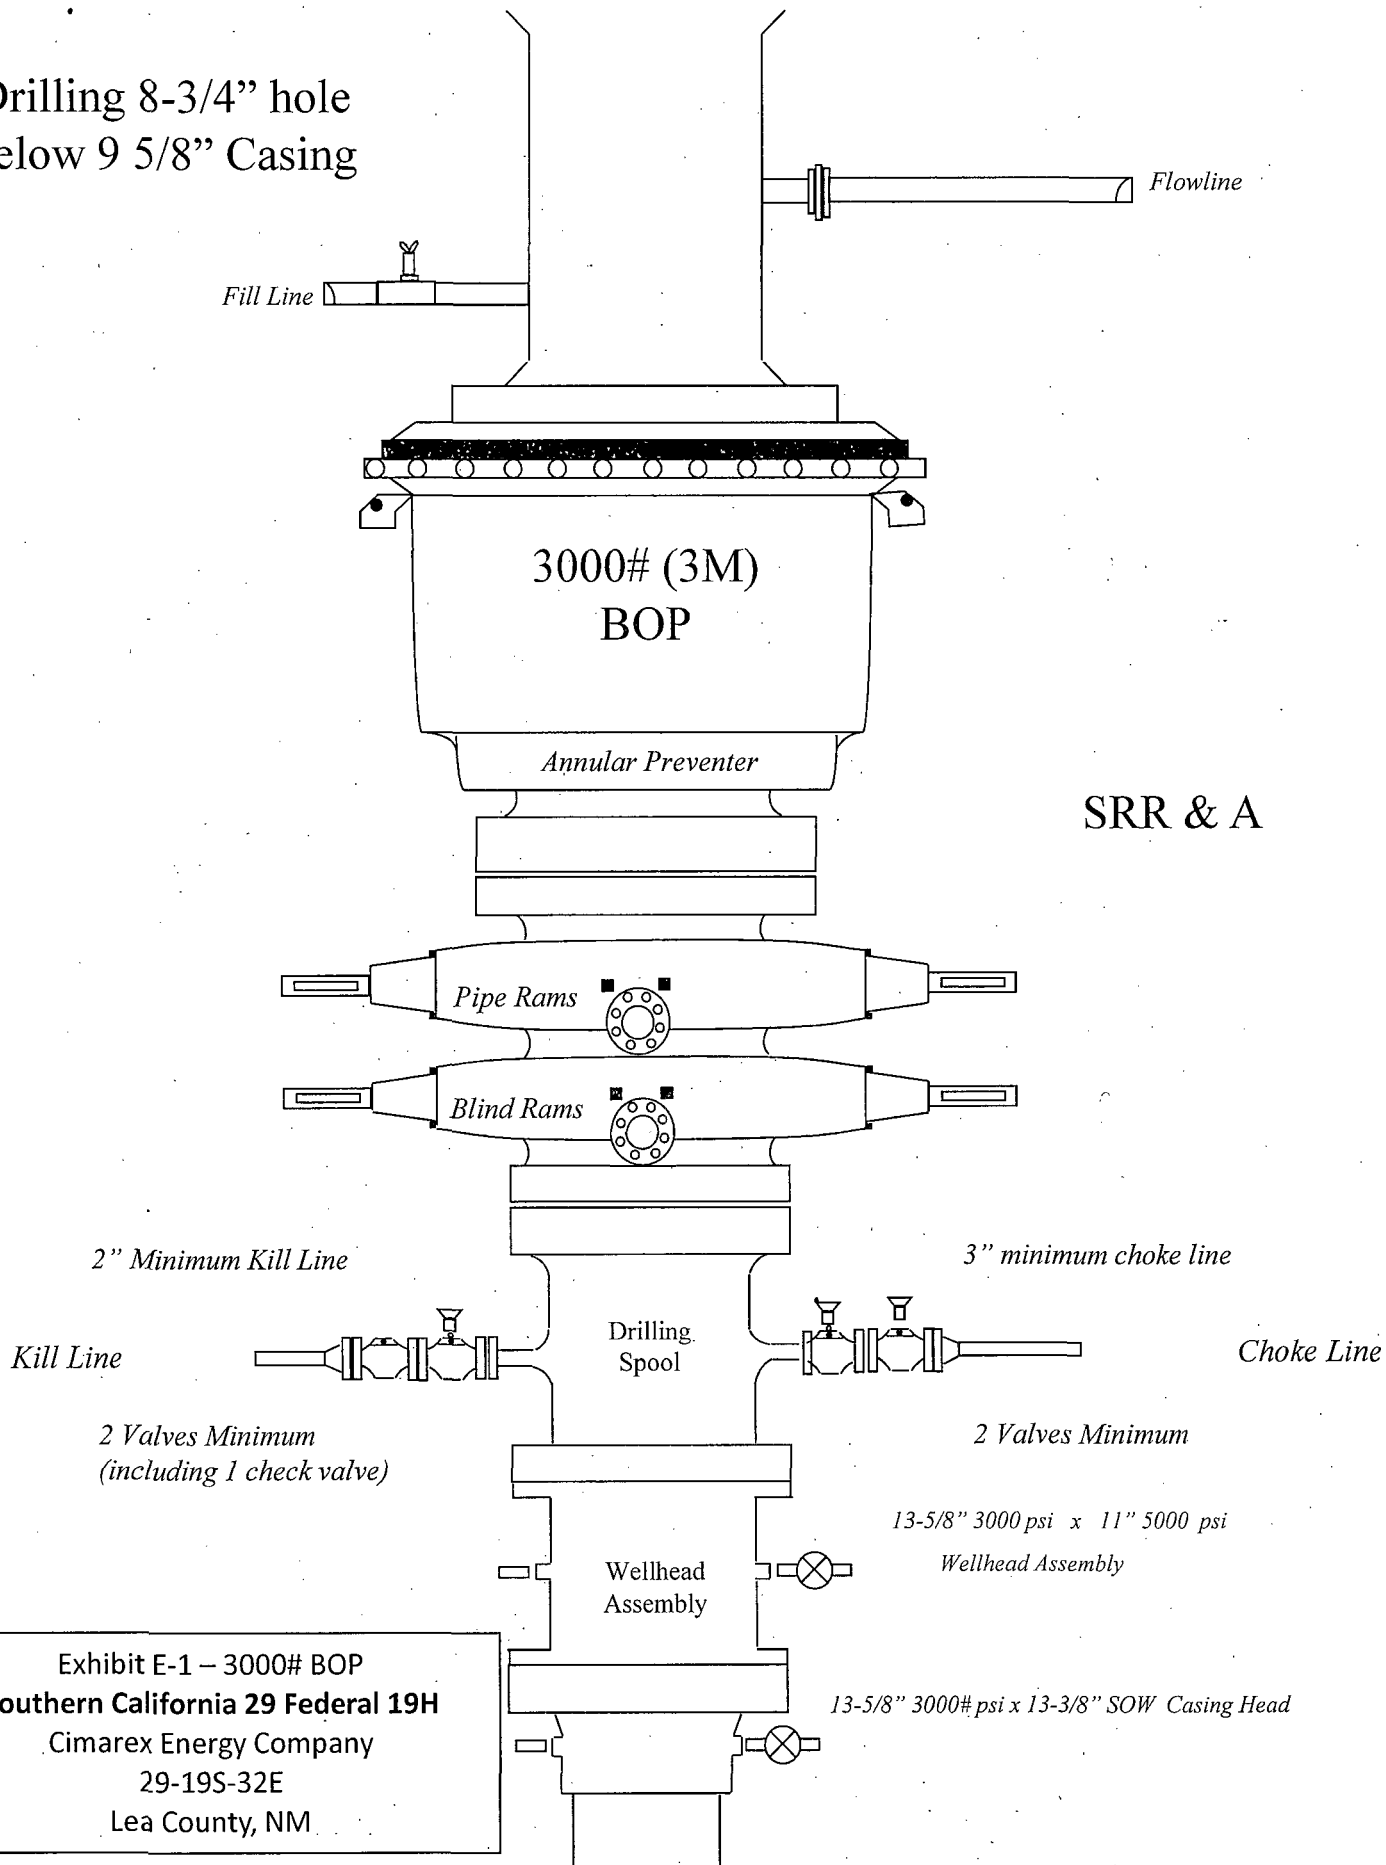

SRR & A

Exhibit E-1 – 3000# BOP
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM

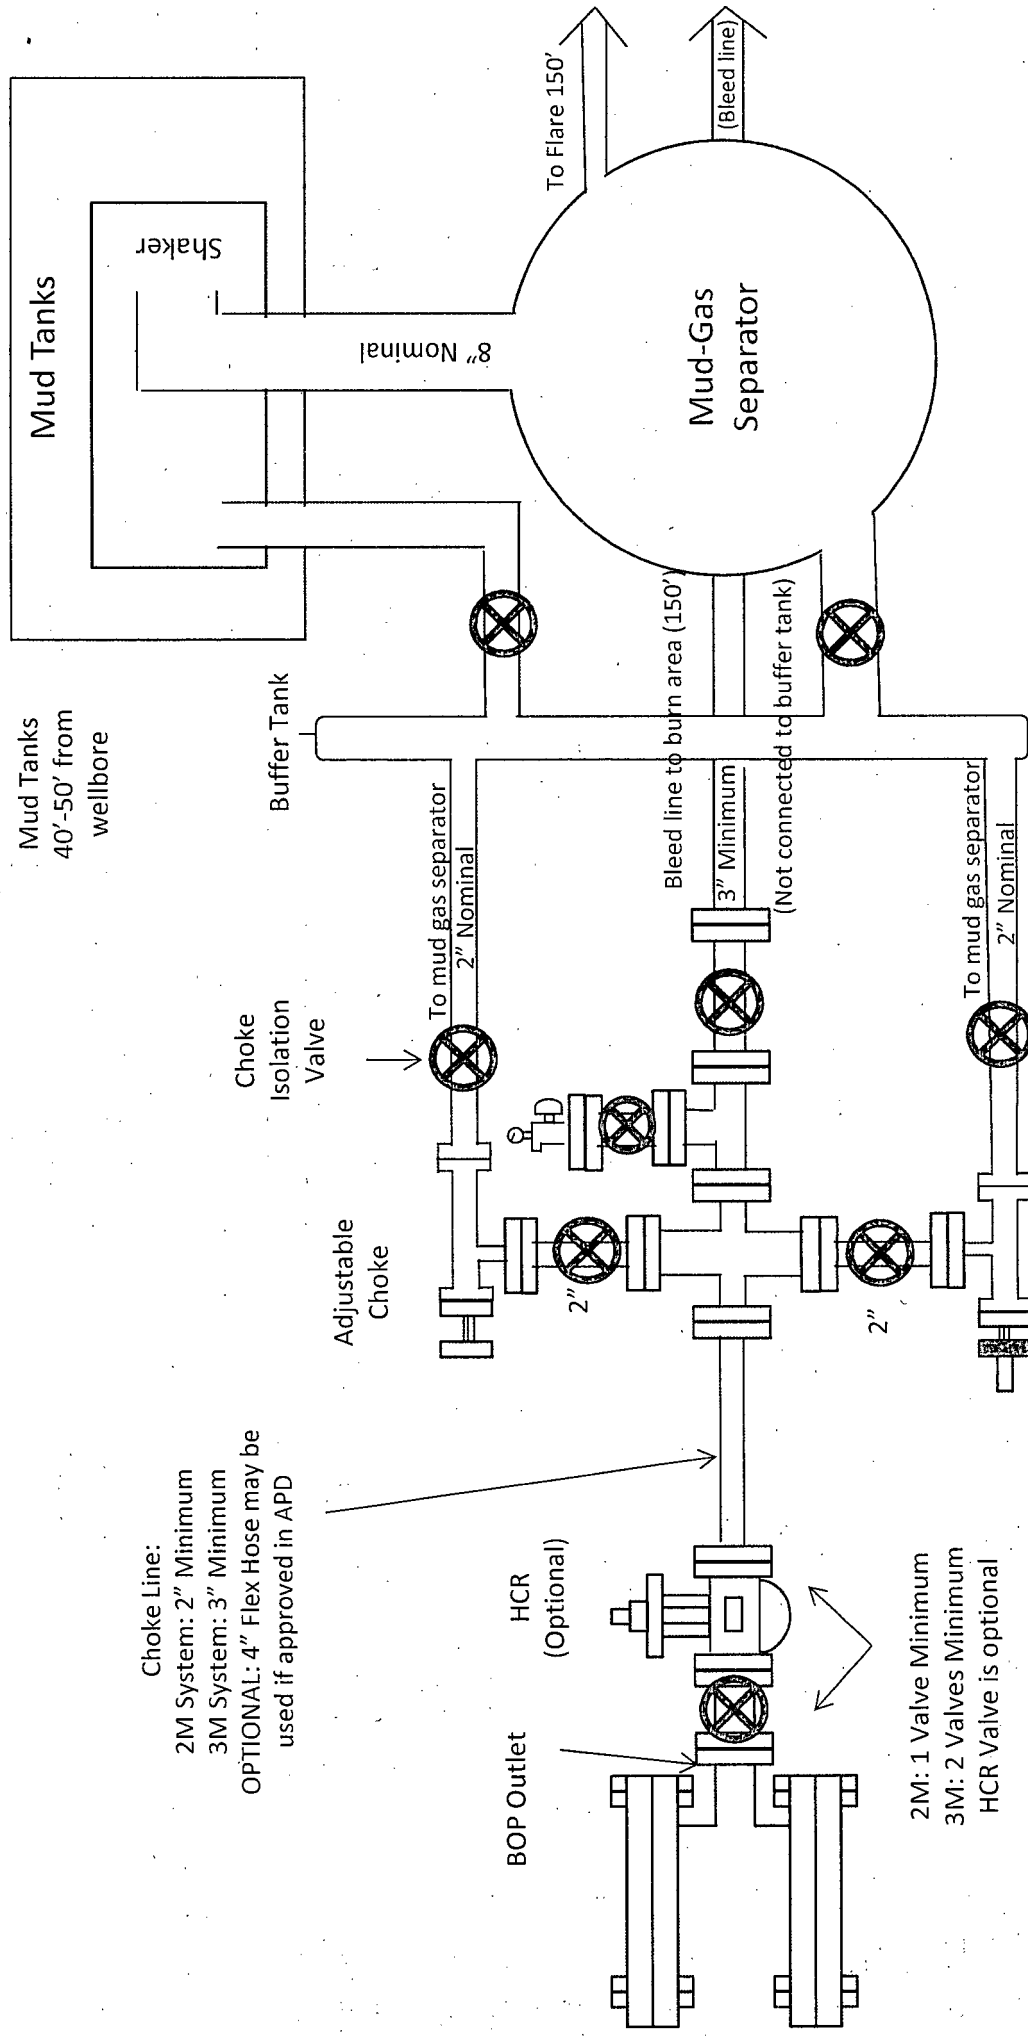



Exhibit E-1 – Choke Manifold Diagram
Southern California 29 Federal 19H
 Cimarex Energy Company
 29-19S-32E
 Lea County, NM

Exhibit F-1
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM



Midwest Hose & Specialty, Inc.

INTERNAL HYDROSTATIC TEST REPORT		
Customer: Oderco Inc		P.O. Number: odyd-271
HOSE SPECIFICATIONS		
Type: Stainless Steel Armor Choke & Kill Hose	Hose Length: 45'ft.	
I.D. 4 INCHES	O.D. 9 INCHES	
WORKING PRESSURE 10,000 PSI	TEST PRESSURE 15,000 PSI	BURST PRESSURE 0 PSI
COUPLINGS		
Stem Part No. OKC OKC	Ferrule No. OKC OKC	
Type of Coupling: Swage-It		
PROCEDURE		
<u>Hose assembly pressure tested with water at ambient temperature.</u>		
TIME HELD AT TEST PRESSURE 15 MIN.	ACTUAL BURST PRESSURE: 0 PSI	
Hose Assembly Serial Number: 79793	Hose Serial Number: OKC	
Comments:		
Date: 3/8/2011	Tested: <i>A. Joins</i>	Approved: <i>Kevin</i>



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

Customer: Houston.

Pick Ticket #: 94260

March 3, 2011

Hose Specifications

Hose Type

C & K

I.D.

4"

Length

45'

O.D.

6.09"

Verification

Type of Fitting

41/1610K

Die Size

6.38"

Coupling Method

Swage

Final O.D.

6.25"

Working Pressure

10000 PSI

Burst Pressure

Standard Safety Multiplier Applies


Hose Serial #

5544

Hose Assembly Serial #

79793

Pressure Test

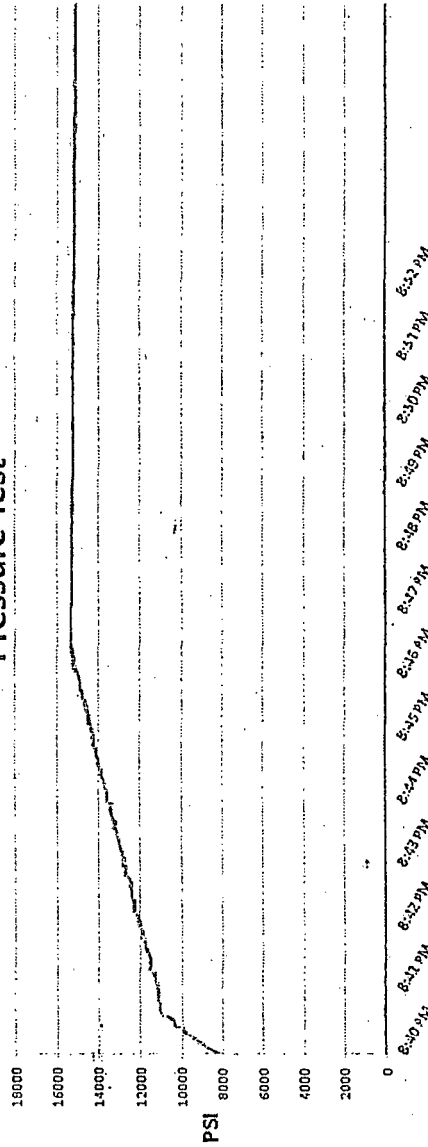

Test Pressure 15000 PSI
Time Held at Test Pressure 11 Minutes
Actual Burst Pressure 15483 PSI
Peak Pressure 15483 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Zac McConnell

Approved By: Kim Thomas

[Signature]

[Signature]

Exhibit F-2 - Co-Flex Hose
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM



Midwest Hose & Specialty, Inc.

Certificate of Conformity

Customer:		PO	
DEM		ODYD-271	
SPECIFICATIONS			
Sales Order		Dated:	
79793		3/8/2011	
We hereby certify that the material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards Supplier: Midwest Hose & Specialty, Inc. 10640 Tanner Road Houston, Texas 77041			
Comments:			
Approved:		Date:	
<i>David Garcia</i>		3/8/2011	




Exhibit F -3- Co-Flex Hose
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM


Specification Sheet Choke & Kill Hose

The Midwest Hose & Specialty Choke & Kill hose is manufactured with only premium components. The reinforcement cables, inner liner and cover are made of the highest quality material to handle the tough drilling applications of today's industry. The end connections are available with API flanges, API male threads, hubs, hammer unions or other special fittings upon request. Hose assembly is manufactured to API 7K. This assembly is wrapped with fire resistant vermiculite coated fiberglass insulation, rated at 2000 degrees with stainless steel armor cover.

Working Pressure:	5,000 or 10,000 psi working pressure
Test Pressure:	10,000 or 15,000 psi test pressure
Reinforcement:	Multiple steel cables
Cover:	Stainless Steel Armor
Inner Tube:	Petroleum resistant, Abrasion resistant
End Fitting:	API flanges, API male threads, threaded or butt weld hammer unions, unbolt and other special connections
Maximum Length:	110 Feet
ID:	2-1/2", 3", 3-1/2", 4"
Operating Temperature:	-22 deg F to +180 deg F (-30 deg C to +82 deg C)

Exhibit F – Co-Flex Hose
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM

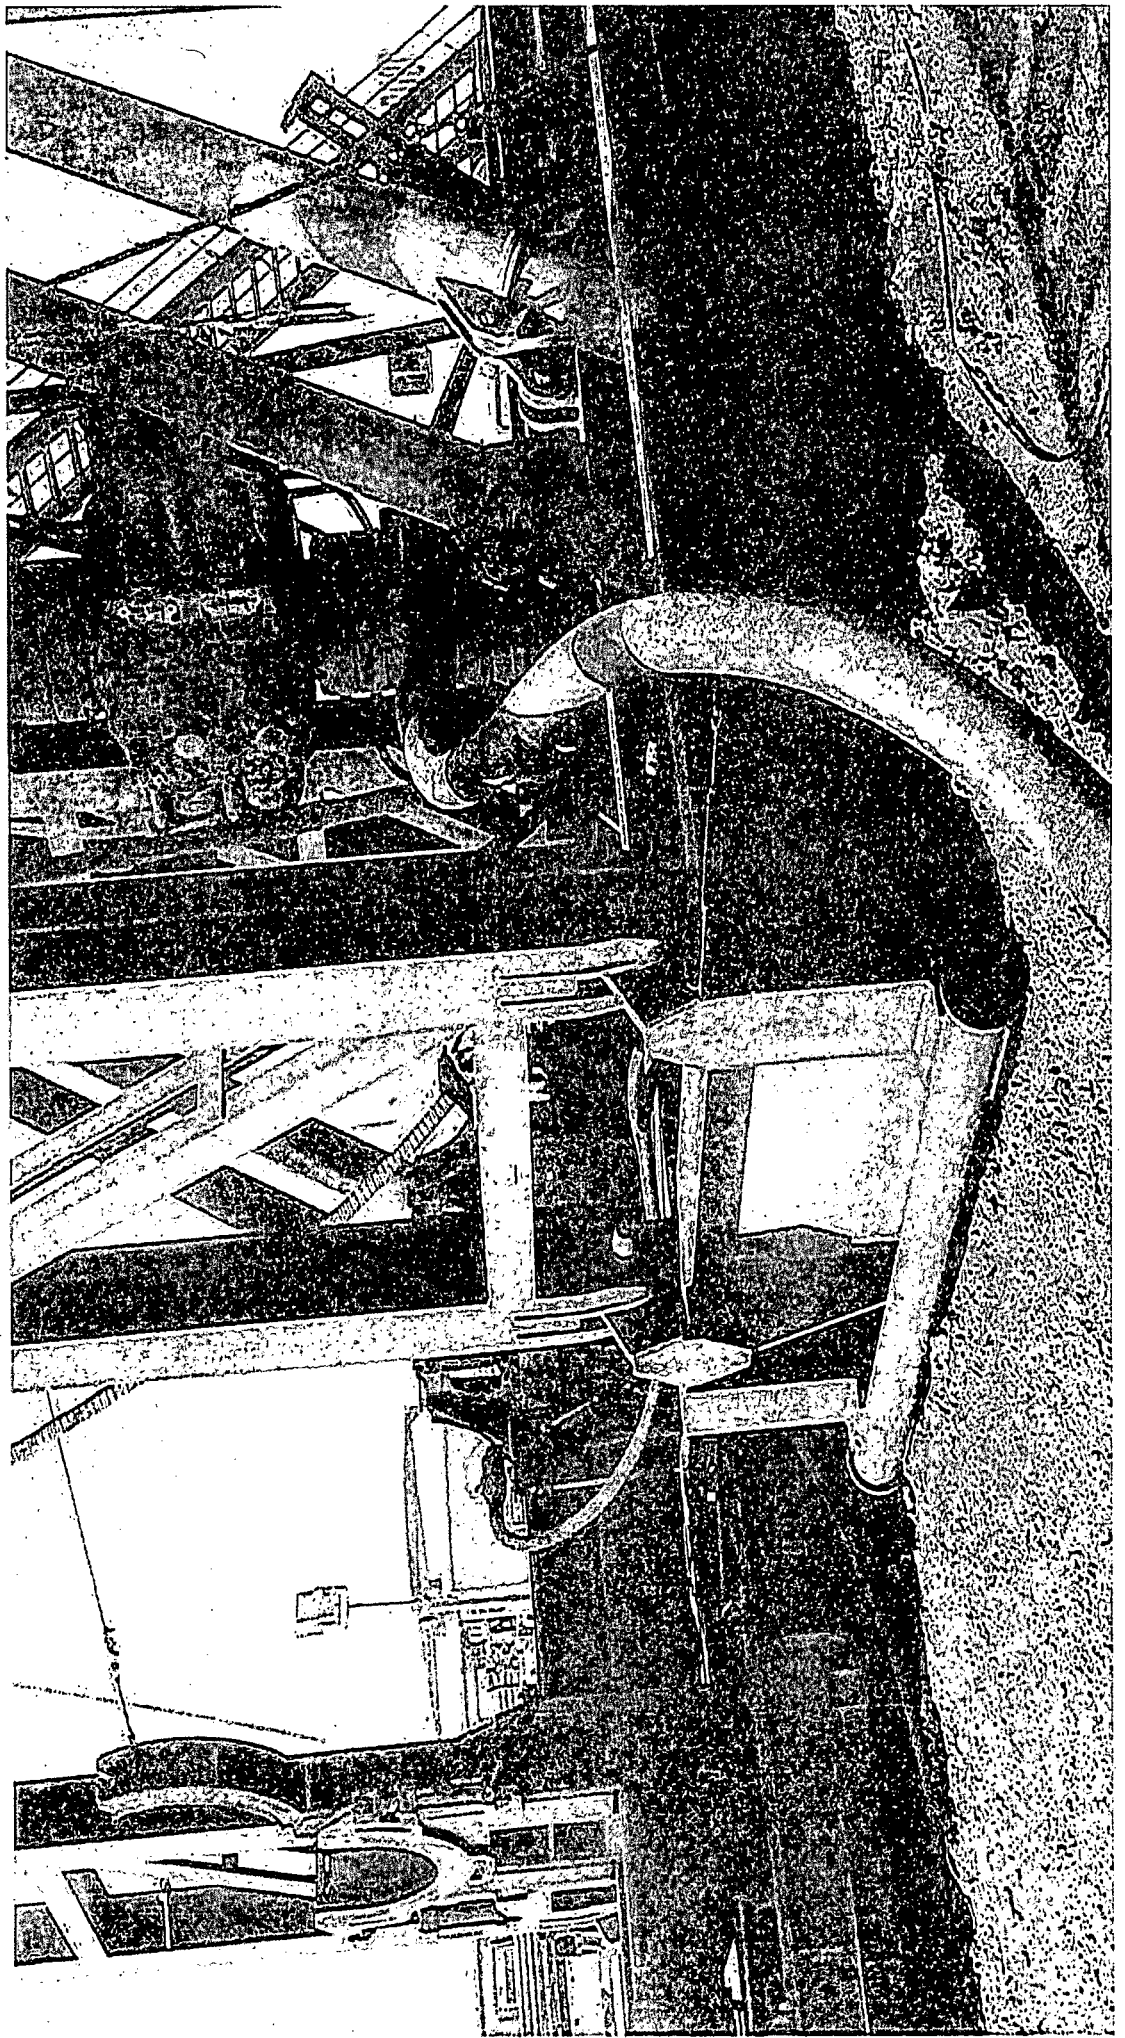

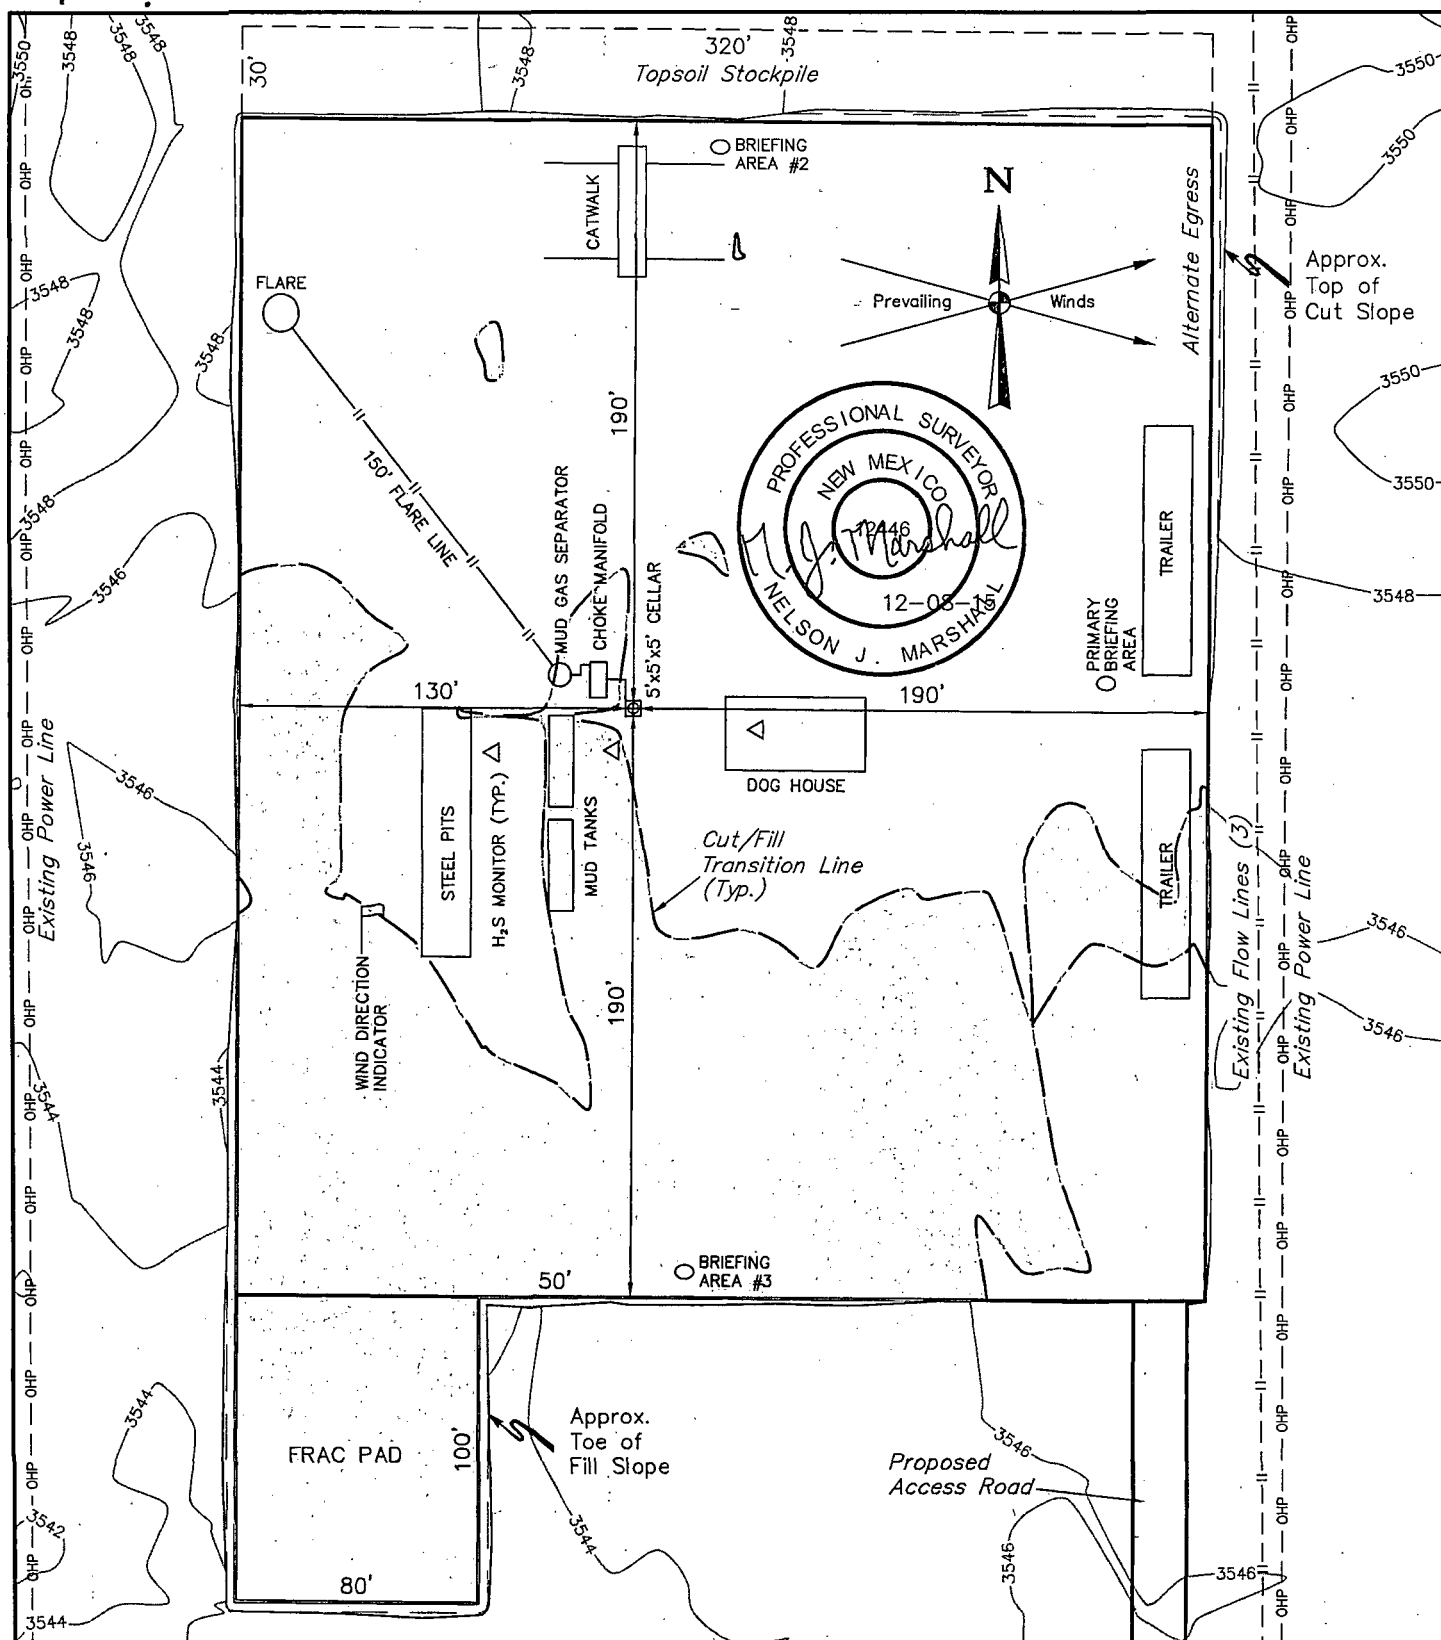

NOTES:

- Contours shown at 2' intervals.

CIMAREX ENERGY CO.

SOUTHERN CALIFORNIA 29 FEDERAL 19H
1390' FSL 308' FWL
NW 1/4 SW 1/4, SECTION 29, T19S, R32E, N.M.P.M.
LEA COUNTY, NEW MEXICO



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

DRAWN BY: B.D.H.	DATE DRAWN: 12-02-15
SCALE: 1" = 60'	REVISED: 00-00-00

TYPICAL RIG LAYOUT

EXHIBIT D


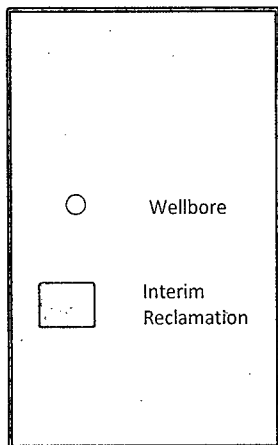
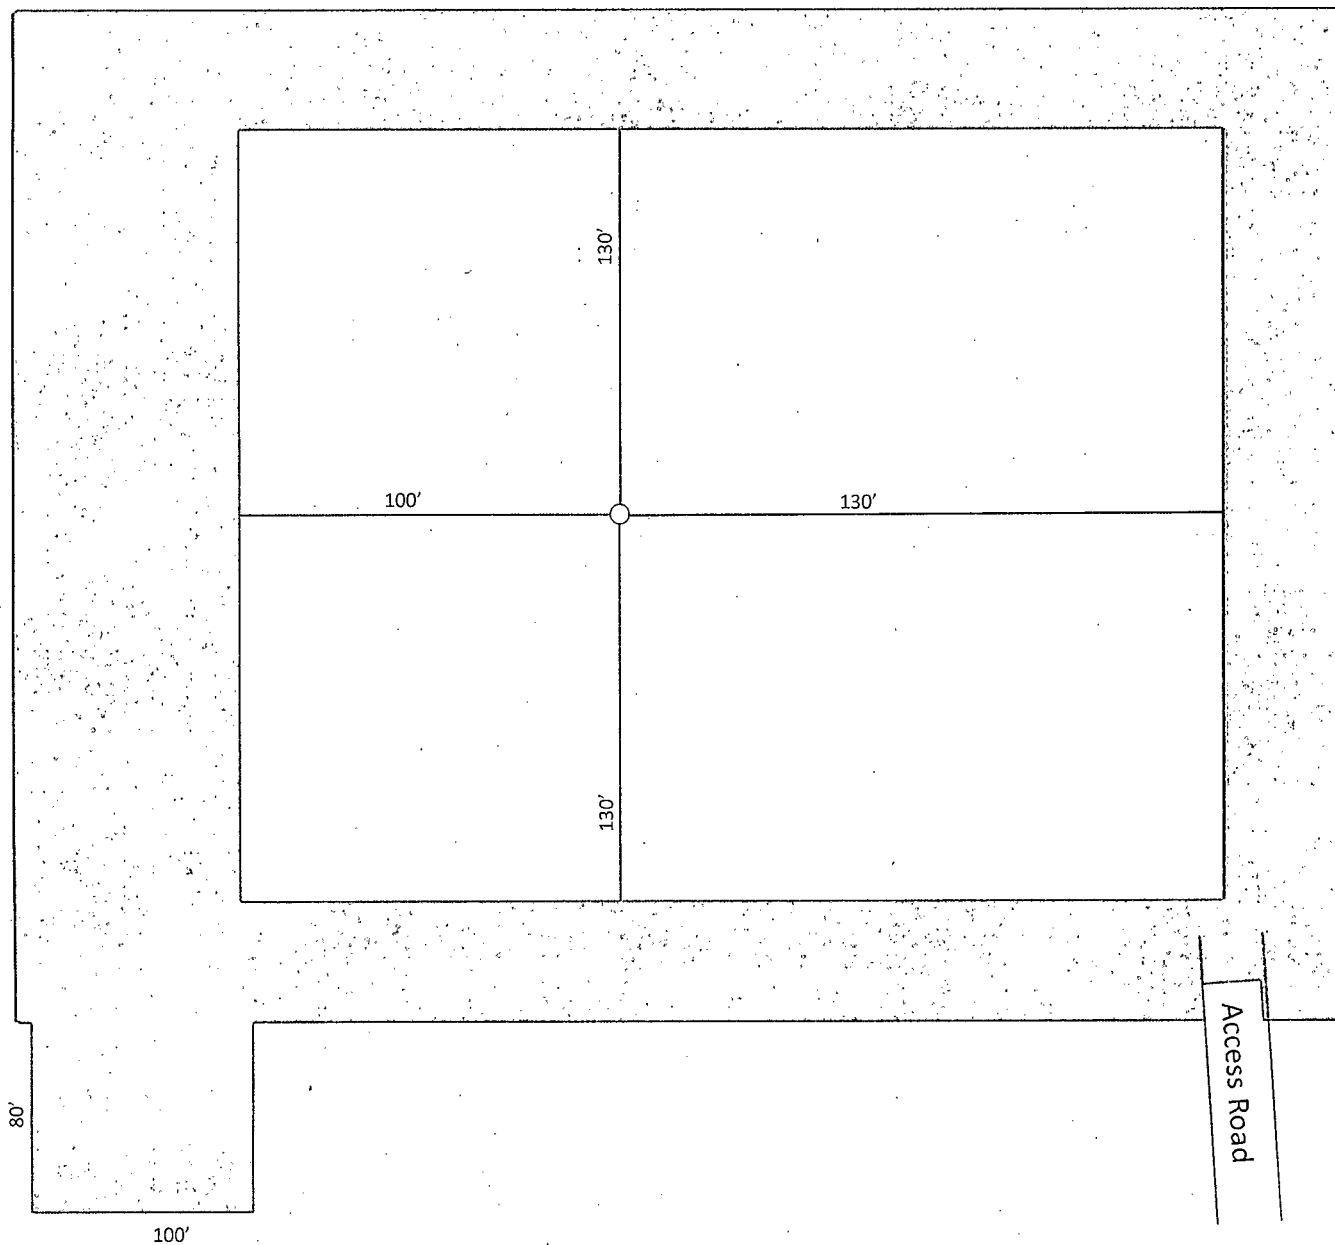


Exhibit D-1
Interim Reclamation Diagram
Southern California 29 Federal 19H
Cimarex Energy Company
29-19S-32E
Lea County, NM