

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-28673	✓
5. Indicate Type of Lease STATE ☒ FEE ☐	✓
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name LEA AQ STATE	✓
8. Well Number 004	✓
9. OGRID Number 162683	✓
10. Pool name or Wildcat PEARL SAN ANDRES, WEST	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,739' - GR	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter O : 330 feet from the SOUTH line and 2310 feet from the EAST line
Section 29 Township 19S Range 35E NMPM County LEA

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,739' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐ DOWNHOLE COMMINGLE ☐ OTHER: ☐	SUBSEQUENT REMEDIAL WORK COMMENCE DRILLING OPERATIONS CASING/CEMENT JOB OTHER: WELL PLUGGED AND ABANDONED
--	--

INT TO PA ☒
P&A NR ☐
P&A R ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 5-1/2" CIBP @ 5,675'; PUMP 60 SXS. CMT. @ 5,675'-5,211' (T/S.A.). *CIRC mud laden fluid & pressure test*
2) PUMP 55 SXS. CMT. @ 3,639'-3,230' (T/YATES, B/SALT); WOC X TAG CMT. PLUG.
3) PUMP 25 SXS. CMT. @ 2,760'-2,640' (T/SALT); WOC X TAG CMT. PLUG.
4) PUMP 25 SXS. CMT. @ 1,869'-1,750' (8-5/8" CSG.SHOE, T/ANHY.); WOC X TAG CMT. PLUG.
5) MIX X CIRC. TO SURF. 25 SXS. CMT. @ 200'-3' 250'
6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

R

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING
PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyler TITLE: AGENT

DATE: 02/25/16

Type or print name: DAVID A. EYLER

E-mail address: deyler@milagro-res.com

PHONE: 432.687.3033

For State Use Only

APPROVED BY: Mah Whitaker

TITLE Petroleum Engr. Specialist

DATE 03/09/2016

Conditions of Approval (if any):

MAR 15 2016

dy


CIMAREX

Spudded: 4/23/1984
Original Operator: Gulf Oil Corp.

T/ANHY. ~ 1,800'
T/SALT ~ 2,700'
B/SALT ~ 3,280'
T/YATEZ ~ 3,589'
T/7-R ~ 3,985'
T/DN. ~ 4,662'
T/S.A. ~ 5,261'

8 5/8", 24# csg @ 1819'
Cmt'd w/900 sxs, circl'd cmt

5 1/2" 15.5# K-55 LT&C + ST&C @ 5920'
Cmt'd w/ 1450 sxs, circl'd cmt

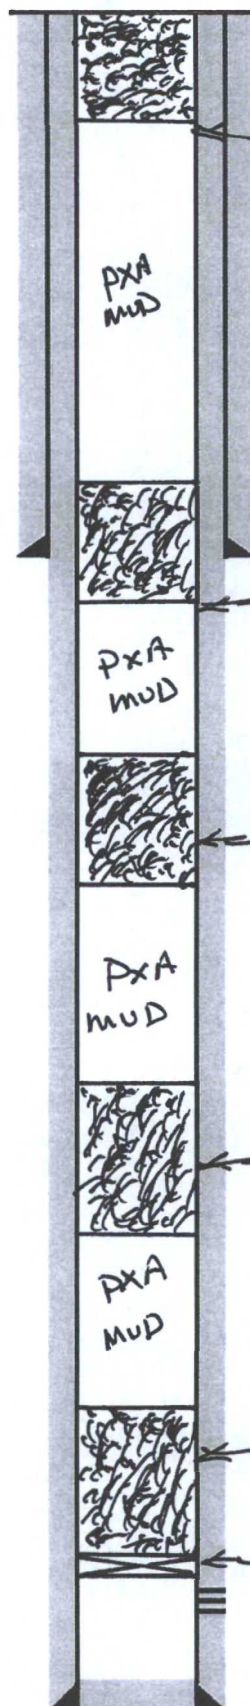

PBTD @ 5922'
TVD @ 5870'

Cimarex Energy Co. of Colorado

Lea AQ State #4

330' FSL & 2310' FEL

Sec. 29, T-19-S, R-35-E, Lea Co., NM

A. Santiago

9/23/15

API #30-025-28673

CIRC. 25 SXS. @ 200'-3'

Pump 25 SXS. @ 1869' - 1750' - TAG

Pump 25 SXS. @ 260' - 2640' - TAG

Pump 55 SXS. @ 3639' - 3230' - TAG

Pump 60 SXS. @ 5675' - 5211'

SET 5 1/2" CIBPC @ 5675'

San Andres perfs (5756 - 5856')

DAE 02/25/16



Spudded: 4/23/1984
Original Operator: Gulf Oil Corp.

Cimarex Energy Co. of Colorado

Lea AQ State #4

330' FSL & 2310' FEL


Sec. 29, T-19-S, R-35-E, Lea Co., NM

A. Santiago

9/23/15

API #30-025-28673

8 5/8", 24# csg @ 1819'
Cmt'd w/900 sxs, circl'd cmt

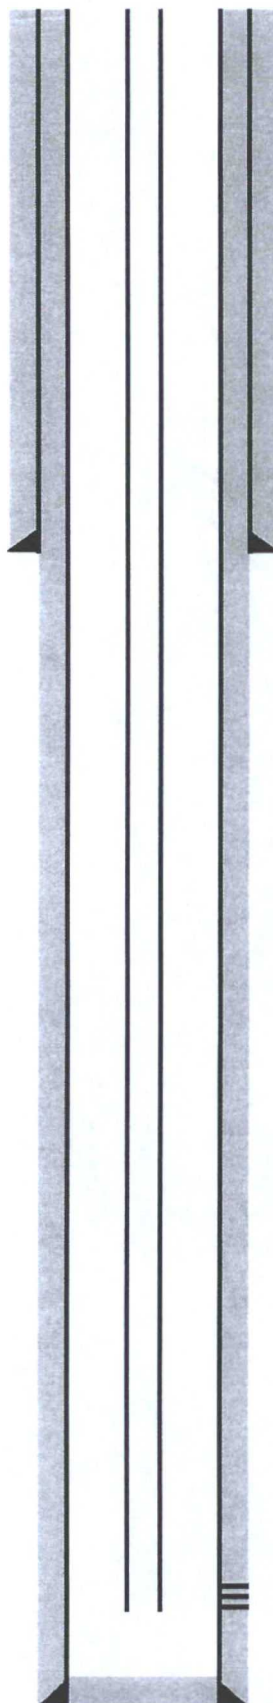

Tubing & Rod Detail:
See Tubing Tab

5 1/2" 15.5# K-55 LT&C + ST&C @ 5920'
Cmt'd w/ 1450 sxs, circl'd cmt

San Andres perms (5756 - 5856')

PBTD @ 5922'
TVD @ 5870'