

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

HOBBS OCD

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

JUN 15 2016

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-23701
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator ConocoPhillips Company		6. State Oil & Gas Lease No. B-2073
3. Address of Operator P.O. Box 51810 Midland, TX 79710		7. Lease Name or Unit Agreement Name East Vacuum GSA Unit Tr 0524
4. Well Location Unit Letter F : 1650 feet from the North line and 2310 feet from the West line Section 5 Township 18-S Range 35-E NMPM County Lea		8. Well Number 118
		9. OGRID Number 217817
		10. Pool name or Wildcat Vacuum (GB/SA)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3966' RKB		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT F	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	INT TO PA PM P&A NR _____ P&A R _____
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

--MIRU. ND WH, NU BOP.
--RIH Tbg - Tag BP @ 4,420'. Circ hole w/ MLF. Spot 50sx cmt to 3,740'. WOC-Tag
--Spot 30sx cmt @ 3,100' - 2,778'. WOC-Tag
--Perf @ 1,500' - Sqz 40sx cmt to 1,350'. WOC-Tag
--Spot 35sx cmt @ 452' to surface
--POOH. Fill wellbore. Verify cmt @ surface in all annuli

Amended from previous C103
to P&A approved on 3-30-2015.

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING
PLUGGING OPERATIONS

A closed-loop system will be used for all fluids from this wellbore and disposed of required by OCD Rule 19.15.17

Spud Date: **2/9/71** Rig Release Date: **2/20/71**

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE **Greg Bryant** TITLE **Area Mgr - Basic Energy Services** DATE **6/13/16**
Type or print name **Greg Bryant** E-mail address: _____ PHONE: **432-563-3355**
For State Use Only
APPROVED BY: **Mark W. [Signature]** TITLE **Petroleum Engr. Specialist** DATE **6/16/2016**
Conditions of Approval (if any):

WELLBORE SKETCH
ConocoPhillips Company - Lower 48 - Mid-Continent BU / Permian Operations

Date: March 10, 2015

RKB @ 3966'
 DF @ 3965'
 GF @ 3956'

Subarea : Buckeye
 Lease & Well No. : East Vacuum GB/SA Unit, Tract 0524 118
 Legal Description : 1650 FNL & 2310 FWL, Sec. 5, T-18S, R-35E
 County : Lea State : New Mexico
 Field : Vacuum (Grayburg-San Andres)
 Date Spudded : 2/9/1971 Rig Released: 2/20/1971
 API Number : 30-025-23701
 Status: Producing

State Lease No. B-2073
 OGRID No. 017643

Stimulation History:

Interval	Date	Type	Gals	Lbs. Sand	Max Press	ISIP	Max Rate	Max Down
	2/23/1971	Perf 4579-4585, 4592-4600, 4604-4610 w/ 1 SPF						
4579-4610	2/24/1971	15% NEA	1000					
	12/17/1974	Perf 4472-4474, 4482-4484, 4491-4493, 4510-4512, 4520-4522, 4534-4536, 4562-4564 w/ 2 SPF						
4472-4564	12/18/1974	28% HCL	5000		2800			
	8/18/1991	Perf 4471-4475, 4479-4483, 4490-4497, 4505-4513, 4518-4526, 4529-4541, 4555-4564, 4567-4569, 4578-4587						
4471-4587	8/19/1991	15% NEFE	6000					
	9/3/1991	Isolate lk fr 430-438; sqz several times total of 1400 sxs cmt						
4471-4587	1/28/2009	Xylene	1000					
	6/8/2016	Set CIBP @ 4420'						

12 1/4" Hole

8 5/8" 32# K-55 @ 402'
 Cmt'd w/ 350 sxs, circ 25 sxs
 TOC @ Surface

Top Salt @

Sqz csg lk @ 430-438 w/ 1400 sxs cmt

TOC 4 1/2" @ 2700' (TS)

Base Salt @

4471-4587'

4472-4564'

4579-4610'

7 7/8" Hole
 4 1/2" 11.6# J-55 @ 4696'
 Cmt'd w/ 275 sxs
 TOC @ 2700' (TS)

Formation Tops:

Rustler
 Yates 2828'
 Queen 3790'
 Grayburg 4090'
 San Andres 4427'
 Glorieta

PBTD @ 4688'
 TD @ 4700'

WELLBORE SKETCH
ConocoPhillips Company - Lower 48 - Mid-Continent BU / Permian Operations

Date: March 10, 2015


RKB @ 3966'
DF @ 3965'
GF @ 3956'

Subarea : Buckeye
Lease & Well No. : East Vacuum GB/SA Unit, Tract 0524 118
Legal Description : 1650 FNL & 2310 FWL, Sec. 5, T-18S, R-35E
County : Lea State : New Mexico
Field : Vacuum (Grayburg-San Andres)
Date Spudded : 2/9/1971 Rig Released: 2/20/1971
API Number : 30-025-23701
Status: Producing

State Lease No. B-2073
OGRID No. 017643

Stimulation History:

Interval	Date	Type	Gals	Lbs. Sand	Max Press	ISIP	Max Rate	Down
	2/23/1971	Perf 4579-4585, 4592-4600, 4604-4610 w/ 1 SPF						
4579-4610	2/24/1971	15% NEA	1000					
	12/17/1974	Perf 4472-4474, 4482-4484, 4491-4493, 4510-4512, 4520-4522, 4534-4536, 4562-4564 w/ 2 SPF						
4472-4564	12/18/1974	28% HCL	5000		2800			
	8/18/1991	Perf 4471-4475, 4479-4483, 4490-4497, 4505-4513, 4518-4526, 4529-4541, 4555-4564, 4567-4569, 4578-4587						
4471-4587	8/19/1991	15% NEFE	6000					
	9/3/1991	Isolate lk fr 430-438; sqz several times total of 1400 sxs cmt						
4471-4587	1/28/2009	Xylene	1000					
	6/8/2016	Set CIBP @ 4420'						

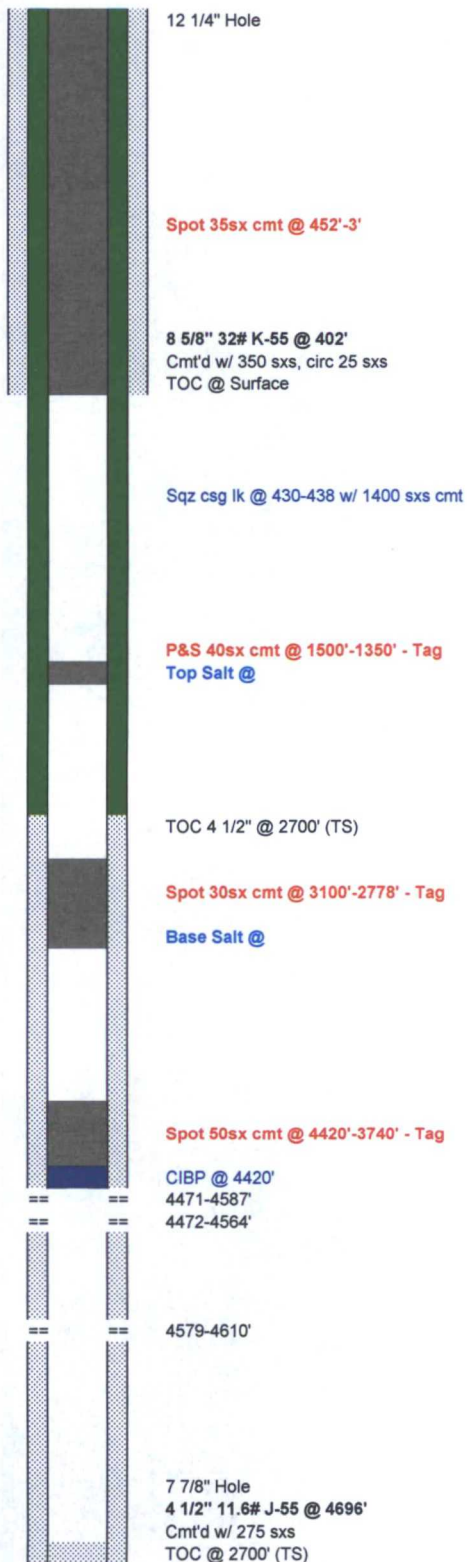

Formation Tops:

Rustler
Yates 2828'
Queen 3790'
Grayburg 4090'
San Andres 4427'
Glorieta

PBTD @ 4688'
TD @ 4700'