

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-31366
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name LOVINGTON SAN ANDRES UNIT
8. Well Number 72
9. OGRID Number 241333 4323
10. Pool name or Wildcat LOVINGTON SAN ANDRES G/B

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☒ WATER INJECTOR ☒	7. Lease Name or Unit Agreement Name LOVINGTON SAN ANDRES UNIT
2. Name of Operator CHEVRON U.S.A. INC.	8. Well Number 72
3. Address of Operator DEAUVILLEE BLVD. RM #n3002 MIDLAND, TX. 79706	9. OGRID Number 241333 4323
4. Well Location GPS Y-LAT 32. X-LONG -103. Unit Letter P : 156 feet from the SOUTH line and 1130 feet from the EAST line Section 36 Township 16-S Range 36-E NMPM County LEA	10. Pool name or Wildcat LOVINGTON SAN ANDRES G/B
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,828' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT

REMEDIAL WORK ☐ INT TO PA ☒
COMMENCE DRILLING OPNS. ☐ P&A NR ☐
CASING/CEMENT JOB ☐ P&A R ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 8 5/8" 24 # @ 408', TOC SURF. 5 1/2" 15.5# @ 5,070' TOC SURF, PERFS 4,620' - 5,016', TD 5,070'.

ON OR BEFORE 07/29/16 MIRU, NDWH, NU BOP & TEST. POOH TBG. & ESP, RHT TO 5,016', CIR MLF.

MIX & SPOT 65 SX CL "C" CMT 5,016' - 4,500', WOC TAG & TEST (LOVINGTON DRINKARD, SAN ANDRES)

Set CIBP at 4570'. Cap w/ 25 sx. Circ MLF. Pressure test CSG.

MIX & SPOT 180 SX CL "C" CMT FROM 4,421' - 2,900'. (GRAYBURG, QUEEN, 7 RIVERS, YATES)

Spot 30 sx classic at 2100'. (T. Salt)

MIX & SPOT 55 SX CL "C" CMT FROM 460' BACK TO SURFACE. CUT ALL CASING & ANCHORS & REMOVED 3' BELOW GRADE. WELD ON DRY HOLE MARKER AS PER RULE 19.15.7.14. OF NMAC, CLEAN LOCATION.

Verify Cement to surface all strings

ALL CEMENT PLUGS CLASS "C", W/ CLOSED LOOP SYSTEM.

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING
PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Monty L. McCarver TITLE Agent for Chevron DATE 07/26/16
Type or print name Monty L. McCarver E-mail address: monty.mccarver@cjes.com PHONE: 713-325-6288

For State Use Only
APPROVED BY: Wanda Whitaker TITLE Petroleum Engr Specialist DATE 7/28/2016

Conditions of Approval (if any):

Monty McCarver

From: Humphries, Sharon <SHumphries@chevron.com>
Sent: Monday, July 25, 2016 9:43 AM
To: Humphries, Sharon
Subject: WBD LSAU 72

CURRENT WELLBORE DIAGRAM

Lease: Lovington San Andres Unit **Well No:** 72 **Field:** Lovington (Drinkard)
Location: 156' FSL & 1130' FEL **Sec:** 36 **Blk:** T16S, R36E **Survey:**
County: Lea **St:** NM **Refno:** OQ3282 **API:** 30-025-31366 **Cost Center:** BCFA30700
Current Status: SI-OL **Anchor Test Date:**
Directions to Wellsite:

Surface Csg.

Size: 8-5/8"
Wt.: 24#
Set @: 408'
Sxs cmt: 300sx
Circ: Yes
TOC: Surface
Hole Size: 12-1/4"

KB:
DF:
GL: 3820'
Spud Date: 10/15/1991
Compl. Date: 11/21/1991

Production Csg.

Size: 5-1/2"
Wt.: 15.5#
Set @: 5070'
Sxs Cmt: 1300sx
Circ: Yes
TOC: Surface
Hole Size: 7-7/8"

Tubing Detail

# Jts.	Size		Footage
1	2-7/8"	Ext Upset - 2.441 ID 2.347	6.00
1	2-7/8"	Crossover Nipple	1.00
145	2-7/8"	J-55 6.5# - 2.441 ID 2.347	4541.00
1		ESP Motor	11.00
1		ESP Seal	6.00
1		ESP Pump	16.00
149			4581.00

ESP / Rod Detail

End of Equipment **4581.00**

FORMATION TOPS

Yates 3029'
7 Rivers 3269'
Queen 3680'
Grayberg 4371'
San Andres 4580'

COTD:
PBTD: 5026'
TD: 5070'

Perfs

2 JSPF

4620-34' 4927-35'
 4647-53' 4960-70'
 4666-76' 4985-94'
 4787-90' 5003-06'
 4810-16' 5013-16'
 4837-40'
 4842-45'
 4862-66'
 4896-4906'

PBTD 5026'
 TD 5070'

Remarks: See Failure History

Monty McCarver

From: Humphries, Sharon <SHumphries@chevron.com>
Sent: Monday, July 25, 2016 9:43 AM
To: Humphries, Sharon
Subject: WBD LSAU 72

P+A

WELLBORE DIAGRAM

Lease: Lovington San Andres Unit **Well No:** 72 **Field:** Lovington (Drinkard)
Location: 156' FSL & 1130' FEL **Sec:** 36 **Blk:** T16S, R36E **Survey:**
County: Lea **St:** NM **Refno:** OQ3282 **API:** 30-025-31366 **Cost Center:** BCFA30700
Current Status: SI-OL **Anchors Test Date:**
Directions to Wellsite:

Surface Csg.

Size: 8-5/8"
Wt.: 24#
Set @: 408'
Sxs cmt: 300sxs
Circ: Yes
TOC: Surface
Hole Size: 12-1/4"

KB:
DF:
GL: 3820'
Spud Date: 10/15/1991
Compl. Date: 11/21/1991

Production Csg.


Size: 5-1/2"
Wt.: 15.5#
Set @: 5070'
Sxs Cmt: 1300sxs
Circ: Yes
TOC: Surface
Hole Size: 7-7/8"

FORMATION TOPS

Yates	3029'
7 Rivers	3269'
Queen	3680'
Grayberg	4371'
San Andres	4580'

COTD:
PBTD: 5026'
TD: 5070'

PBTD 5026'
TD 5070'

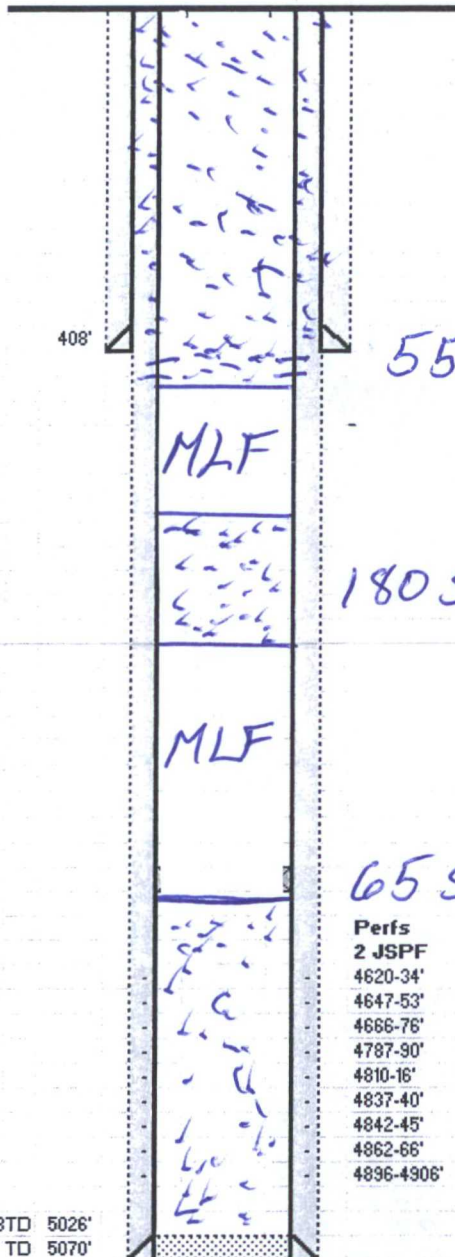

55 SX FROM 460'-SURFACE

180 SX 4,421'-2,900'

65 SX 5,014'-4,500' WOC TAG + TEST

Perfs

2 JSPF

4620-34' 4927-35'
 4647-53' 4960-70'
 4666-76' 4985-94'
 4787-90' 5003-06'
 4810-16' 5013-16'
 4837-40'
 4842-45'
 4862-66'
 4896-4906'

Remarks: See Failure History