

30-025-43361

**PHOENIX****TECHNOLOGY SERVICES USA INC.***Celebrating 20 Years of Focused Solutions*

3610 Elkins Road, Midland, Texas 79705 T. 432.684.0057 F. 432.686.7964 www.phxtech.com

September 8, 2016

Oil Conservation Division
 State of New Mexico
 1625 N. French Drive
 Hobbs, New Mexico 88240

HOBBS OCD
SEP 16 2016
RECEIVED

Dear District 1 - Hobbs

Attention: Regulatory Department

Re: Mewbourne Oil ✓
 Salado Draw 10 W1DM Fee Com 2H
 Lea County, New Mexico
 API #30-025-43361
 Job No. 60313

Enclosed please find the Survey Data Certification, and the original Plat and one copy of the Survey Report performed on the above referenced Well by Phoenix Technology Services, Inc. (P-5 No. 664171). Other information required by your office is as follows:

Name & Title of Surveyor	Drain Hole Number	Surveyed Depths		Dates Performed		Type of Survey
		From	To	Start	End	
Noe Garza	2H	0	11527	08/25/16	08/25/16	Gyro

A certified plat on which the bottom hole location is oriented both to the surface location and to the lease lines (or unit lines in case of pooling) is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

Best Regards,

Claudia Carreon
 Operations Administrator

SURVEY CERTIFICATION FORM



PHOENIX
TECHNOLOGY SERVICES

3610 Elkins Road Midland, TX 79705 t:432-684-0057 f: 432-686-7964

HOBBS OCD

SEP 16 2016

RECEIVED

Company: Mewbourne

Job #: 60313

Well Name: Salado Draw 10 W1DM Fee Com 2H

County/State: Lea Co., New Mexico

Survey Instrument Type: North Seek Rate Gyro

API # 30-025-43361

TIE-IN DATA

Measure Depth (ft)	Vertical Depth (ft)	Inclination (°)	Azimuth (°)	N-S Coordinates	E-W Coordinates	Data Source
0	0	0	0	0	0	Surface

First Survey

Date	Depth (ft)	Inclination (°)	Azimuth (°)
2016-08-25	0	0	0

Last Survey

Date	Depth (ft)	Inclination (°)	Azimuth (°)
2016-08-25	11527	4.15	244.21

Projected TD Survey

Date	Depth (ft)	Inclination (°)	Azimuth (°)
0	0	0	0

Grid Correction
-0.41

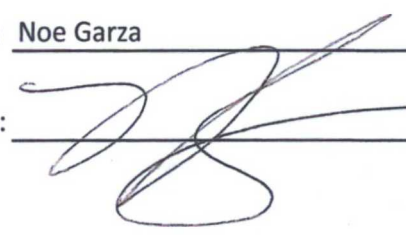
Gyro Operator: Phoenix Technology Services USA Ltd.

Gyro Supervisor: Jaime Stephenson

To the best of my knowledge I certify this survey data to be correct and true

Date: 08-25-16

Print Name: Noe Garza

Signature: 



Company: Mewbourne
 Well: SaladoDraw10W1DMFeeCom2H
 Location: Lea Co., New Mexico
 Rig: Patterson 270

Job Number: 60313
 Grid Corr.: -0.41
 Lat: 32.06
 Long: -103.57

Date: 08-25-16
 Calculation Method: Minimum Curvature
 Proposed Azimuth:
 RKB - MSL in feet: 28 Feet
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
Enter Tie-In Survey on Line 10													
FIELD COPY, NON-DEFINITIVE													
TIE IN	0			0	0	0	0	0					
Gyro	100.00	0.80	252.76	100	100.00	-0.21	0.21 S	0.67 W	0.70	252.76	0.80	0.80	252.76
	200.00	0.93	269.40	100	199.99	-0.42	0.42 S	2.15 W	2.19	258.86	0.28	0.13	16.64
	300.00	0.66	196.06	100	299.98	-0.98	0.98 S	3.12 W	3.27	252.47	0.97	-0.27	-73.34
	400.00	0.89	234.79	100	399.97	-1.99	1.99 S	3.91 W	4.39	243.08	0.56	0.23	38.73
	500.00	0.36	269.37	100	499.96	-2.44	2.44 S	4.86 W	5.44	243.36	0.63	-0.53	34.58
	600.00	0.80	304.03	100	599.96	-2.05	2.05 S	5.75 W	6.11	250.39	0.54	0.44	34.66
	700.00	0.62	11.82	100	699.95	-1.13	1.13 S	6.22 W	6.32	259.71	0.81	-0.18	-292.21
	800.00	0.52	35.30	100	799.95	-0.23	0.23 S	5.85 W	5.85	267.75	0.25	-0.10	23.48
	900.00	0.64	329.28	100	899.94	0.62	0.62 N	5.87 W	5.90	276.04	0.64	0.12	293.98
	1000.00	0.78	201.04	100	999.94	0.47	0.47 N	6.40 W	6.42	274.16	1.28	0.14	-128.24
	1100.00	0.82	288.75	100	1099.93	0.06	0.06 N	7.32 W	7.32	270.47	1.11	0.04	87.71
	1200.00	0.89	294.10	100	1199.92	0.61	0.61 N	8.71 W	8.73	273.99	0.11	0.07	5.35
	1300.00	0.58	12.53	100	1299.92	1.42	1.42 N	9.31 W	9.41	278.67	0.96	-0.31	-281.57
	1400.00	0.28	128.76	100	1399.91	1.76	1.76 N	9.01 W	9.18	281.06	0.75	-0.30	116.23
	1500.00	0.42	125.25	100	1499.91	1.40	1.40 N	8.52 W	8.63	279.31	0.14	0.14	-3.51
	1600.00	0.36	161.68	100	1599.91	0.89	0.89 N	8.12 W	8.17	276.23	0.25	-0.06	36.43
	1700.00	0.13	284.53	100	1699.91	0.62	0.62 N	8.13 W	8.15	274.33	0.44	-0.23	122.85
	1800.00	0.37	183.03	100	1799.91	0.32	0.32 N	8.26 W	8.26	272.23	0.42	0.24	-101.50
	1900.00	0.21	326.73	100	1899.91	0.15	0.15 N	8.37 W	8.37	271.05	0.55	-0.16	143.70
	2000.00	0.29	331.33	100	1999.91	0.53	0.53 N	8.60 W	8.61	273.52	0.08	0.08	4.60
	2100.00	0.27	352.91	100	2099.91	0.98	0.98 N	8.75 W	8.80	276.42	0.11	-0.02	21.58
	2200.00	0.28	244.23	100	2199.90	1.11	1.11 N	9.00 W	9.06	277.04	0.45	0.01	-108.68
	2300.00	0.35	252.75	100	2299.90	0.91	0.91 N	9.51 W	9.55	275.50	0.08	0.07	8.52
	2400.00	0.31	67.37	100	2399.90	0.93	0.93 N	9.55 W	9.59	275.55	0.66	-0.04	-185.38
	2500.00	0.13	72.99	100	2499.90	1.07	1.07 N	9.19 W	9.25	276.61	0.18	-0.18	5.62
	2600.00	0.29	348.88	100	2599.90	1.35	1.35 N	9.13 W	9.23	278.39	0.31	0.16	275.89
	2700.00	0.74	65.31	100	2699.90	1.87	1.87 N	8.59 W	8.79	282.25	0.73	0.45	-283.57
	2800.00	0.36	11.59	100	2799.89	2.44	2.44 N	7.94 W	8.31	287.09	0.60	-0.38	-53.72



Company: Mewbourne
 Well: SaladoDraw10W1DMFeeCom2H
 Location: Lea Co., New Mexico
 Rig: Patterson 270

Job Number: 60313
 Grid Corr.: -0.41
 Lat: 32.06
 Long: -103.57

Calculation Method: Minimum Curvature
 Proposed Azimuth:
 RKB - MSL in feet: 28 Feet
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	2900.00	0.99	92.39	100	2899.89	2.71	2.71 N	7.02 W	7.52	291.15	1.00	0.63	80.80
	3000.00	1.28	96.11	100	2999.87	2.56	2.56 N	5.04 W	5.66	296.91	0.30	0.29	3.72
	3100.00	1.47	95.39	100	3099.84	2.32	2.32 N	2.66 W	3.53	311.14	0.19	0.19	-0.72
	3200.00	1.35	94.93	100	3199.81	2.10	2.10 N	0.21 W	2.11	354.42	0.12	-0.12	-0.46
	3300.00	1.43	104.47	100	3299.78	1.69	1.69 N	2.18 E	2.75	52.25	0.24	0.08	9.54
	3400.00	1.28	107.89	100	3399.75	1.03	1.03 N	4.45 E	4.57	76.96	0.17	-0.15	3.42
	3500.00	1.03	115.77	100	3499.73	0.30	0.30 N	6.32 E	6.33	87.31	0.30	-0.25	7.88
	3600.00	0.89	134.29	100	3599.72	-0.64	0.64 S	7.69 E	7.71	94.73	0.34	-0.14	18.52
	3700.00	0.81	158.16	100	3699.71	-1.83	1.83 S	8.50 E	8.70	102.18	0.36	-0.08	23.87
	3800.00	0.86	154.28	100	3799.70	-3.17	3.17 S	9.09 E	9.63	109.20	0.08	0.05	-3.88
	3900.00	0.72	153.54	100	3899.69	-4.41	4.41 S	9.70 E	10.65	114.43	0.14	-0.14	-0.74
	4000.00	0.99	161.76	100	3999.68	-5.79	5.79 S	10.25 E	11.77	119.46	0.30	0.27	8.22
	4100.00	1.61	121.44	100	4099.65	-7.34	7.34 S	11.72 E	13.83	122.07	1.07	0.62	-40.32
	4200.00	1.79	121.18	100	4199.61	-8.88	8.88 S	14.25 E	16.79	121.93	0.18	0.18	-0.26
	4300.00	1.77	126.82	100	4299.56	-10.62	10.62 S	16.83 E	19.90	122.25	0.18	-0.02	5.64
	4400.00	1.95	122.61	100	4399.51	-12.46	12.46 S	19.49 E	23.14	122.58	0.23	0.18	-4.21
	4500.00	2.31	129.26	100	4499.44	-14.65	14.65 S	22.49 E	26.84	123.09	0.44	0.36	6.65
	4600.00	2.19	140.82	100	4599.36	-17.41	17.41 S	25.26 E	30.67	124.58	0.47	-0.12	11.56
	4700.00	1.86	151.85	100	4699.30	-20.32	20.32 S	27.23 E	33.98	126.73	0.51	-0.33	11.03
	4800.00	1.42	184.35	100	4799.26	-22.99	22.99 S	27.90 E	36.15	129.49	1.01	-0.44	32.50
	4900.00	1.05	194.69	100	4899.24	-25.11	25.11 S	27.57 E	37.29	132.32	0.43	-0.37	10.34
	5000.00	1.26	162.79	100	4999.22	-27.05	27.05 S	27.67 E	38.69	134.35	0.67	0.21	-31.90
	5100.00	1.37	184.90	100	5099.19	-29.29	29.29 S	27.89 E	40.44	136.40	0.52	0.11	22.11
	5200.00	1.04	102.06	100	5199.17	-30.67	30.67 S	28.68 E	41.99	136.92	1.61	-0.33	-82.84
	5300.00	1.06	130.82	100	5299.16	-31.46	31.46 S	30.26 E	43.65	136.11	0.52	0.02	28.76
	5400.00	1.30	155.99	100	5399.14	-33.10	33.10 S	31.42 E	45.64	136.49	0.57	0.24	25.17
	5500.00	1.22	125.47	100	5499.11	-34.76	34.76 S	32.75 E	47.76	136.70	0.67	-0.08	-30.52
	5600.00	1.32	199.02	100	5599.10	-36.46	36.46 S	33.24 E	49.34	137.64	1.52	0.10	73.55
	5700.00	0.99	221.87	100	5699.08	-38.20	38.20 S	32.29 E	50.02	139.79	0.56	-0.33	22.85
	5800.00	1.12	286.53	100	5799.06	-38.56	38.56 S	30.78 E	49.34	141.40	1.13	0.13	64.66
	5900.00	0.97	256.93	100	5899.05	-38.47	38.47 S	29.02 E	48.19	142.98	0.55	-0.15	-29.60



Company: Mewbourne
 Well: SaladoDraw10W1DMFeeCom2H
 Location: Lea Co., New Mexico
 Rig: Patterson 270

Job Number: 60313
 Grid Corr.: -0.41
 Lat: 32.06
 Long: -103.57

Calculation Method: Minimum Curvature
 Proposed Azimuth:
 RKB - MSL in feet: 28 Feet
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	6000.00	0.84	237.41	100	5999.03	-39.06	39.06 S	27.58 E	47.81	144.78	0.33	-0.13	-19.52
	6100.00	0.87	180.74	100	6099.02	-40.21	40.21 S	26.95 E	48.41	146.17	0.81	0.03	-56.67
	6200.00	0.72	150.73	100	6199.02	-41.52	41.52 S	27.25 E	49.66	146.73	0.44	-0.15	-30.01
	6300.00	0.62	233.83	100	6299.01	-42.39	42.39 S	27.12 E	50.32	147.39	0.89	-0.10	83.10
	6400.00	0.69	248.19	100	6399.00	-42.93	42.93 S	26.12 E	50.25	148.68	0.18	0.07	14.36
	6500.00	0.54	293.25	100	6499.00	-42.97	42.97 S	25.13 E	49.78	149.68	0.49	-0.15	45.06
	6600.00	0.66	327.31	100	6598.99	-42.30	42.30 S	24.38 E	48.82	150.04	0.37	0.12	34.06
	6700.00	0.31	49.28	100	6698.99	-41.64	41.64 S	24.28 E	48.20	149.75	0.69	-0.35	-278.03
	6800.00	0.64	271.43	100	6798.99	-41.45	41.45 S	23.93 E	47.86	150.00	0.89	0.33	222.15
	6900.00	0.68	208.62	100	6898.98	-41.95	41.95 S	23.08 E	47.89	151.18	0.69	0.04	-62.81
	7000.00	0.64	266.03	100	6998.98	-42.51	42.51 S	22.24 E	47.98	152.38	0.63	-0.04	57.41
	7100.00	0.70	270.78	100	7098.97	-42.54	42.54 S	21.07 E	47.48	153.65	0.08	0.06	4.75
	7200.00	0.65	300.41	100	7198.96	-42.25	42.25 S	19.97 E	46.73	154.70	0.35	-0.05	29.63
	7300.00	0.61	187.20	100	7298.96	-42.49	42.49 S	19.42 E	46.72	155.44	1.05	-0.04	-113.21
	7400.00	0.81	165.34	100	7398.95	-43.70	43.70 S	19.53 E	47.87	155.92	0.33	0.20	-21.86
	7500.00	0.35	199.52	100	7498.95	-44.67	44.67 S	19.61 E	48.79	156.30	0.56	-0.46	34.18
	7600.00	0.70	244.92	100	7598.94	-45.22	45.22 S	18.95 E	49.03	157.26	0.52	0.35	45.40
	7700.00	0.70	265.31	100	7698.94	-45.53	45.53 S	17.79 E	48.88	158.66	0.25	0.00	20.39
	7800.00	0.61	260.11	100	7798.93	-45.67	45.67 S	16.66 E	48.61	159.96	0.11	-0.09	-5.20
	7900.00	0.86	258.90	100	7898.92	-45.91	45.91 S	15.39 E	48.42	161.46	0.25	0.25	-1.21
	8000.00	0.87	212.66	100	7998.91	-46.69	46.69 S	14.25 E	48.82	163.03	0.68	0.01	-46.24
	8100.00	1.03	234.40	100	8098.90	-47.85	47.85 S	13.11 E	49.62	164.68	0.39	0.16	21.74
	8200.00	0.72	141.04	100	8198.89	-48.86	48.86 S	12.77 E	50.51	165.35	1.29	-0.31	-93.36
	8300.00	1.20	277.99	100	8298.88	-49.21	49.21 S	12.13 E	50.68	166.15	1.79	0.48	136.95
	8400.00	0.89	224.54	100	8398.87	-49.62	49.62 S	10.55 E	50.72	168.00	0.98	-0.31	-53.45
	8500.00	1.27	214.44	100	8498.85	-51.08	51.08 S	9.38 E	51.94	169.60	0.42	0.38	-10.10
	8600.00	1.43	267.43	100	8598.83	-52.05	52.05 S	7.50 E	52.59	171.80	1.21	0.16	52.99
	8700.00	1.27	288.93	100	8698.80	-51.75	51.75 S	5.21 E	52.01	174.25	0.53	-0.16	21.50
	8800.00	1.34	316.28	100	8798.78	-50.54	50.54 S	3.35 E	50.66	176.21	0.62	0.07	27.35
	8900.00	1.31	257.20	100	8898.75	-49.95	49.95 S	1.43 E	49.97	178.36	1.31	-0.03	-59.08
	9000.00	1.49	266.92	100	8998.72	-50.28	50.28 S	0.98 W	50.29	181.12	0.30	0.18	9.72



Company: Mewbourne
 Well: SaladoDraw10W1DMFeeCom2H
 Location: Lea Co., New Mexico
 Rig: Patterson 270

Job Number: 60313
 Grid Corr.: -0.41
 Lat: 32.06
 Long: -103.57

Calculation Method: Minimum Curvature
 Proposed Azimuth:
 RKB - MSL in feet: 28 Feet
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	9100.00	1.65	270.74	100	9098.69	-50.33	50.33 S	3.72 W	50.46	184.23	0.19	0.16	3.82
	9200.00	1.86	277.27	100	9198.64	-50.10	50.10 S	6.77 W	50.56	187.70	0.29	0.21	6.53
	9300.00	2.64	285.19	100	9298.56	-49.29	49.29 S	10.60 W	50.42	192.14	0.84	0.78	7.92
	9400.00	2.77	290.95	100	9398.45	-47.83	47.83 S	15.08 W	50.15	197.50	0.30	0.13	5.76
	9500.00	3.11	301.71	100	9498.32	-45.54	45.54 S	19.65 W	49.59	203.34	0.65	0.34	10.76
	9600.00	4.55	301.34	100	9598.09	-42.05	42.05 S	25.34 W	49.09	211.08	1.44	1.44	-0.37
	9700.00	6.69	297.04	100	9697.61	-37.34	37.34 S	33.92 W	50.44	222.25	2.18	2.14	-4.30
	9800.00	7.13	296.66	100	9796.88	-31.90	31.90 S	44.65 W	54.88	234.46	0.44	0.44	-0.38
	9900.00	7.18	296.01	100	9896.10	-26.38	26.38 S	55.82 W	61.74	244.70	0.10	0.05	-0.65
	10000.00	6.30	297.98	100	9995.41	-21.06	21.06 S	66.28 W	69.54	252.37	0.91	-0.88	1.97
	10100.00	5.37	299.68	100	10094.89	-16.17	16.17 S	75.19 W	76.91	257.86	0.95	-0.93	1.70
	10200.00	5.17	294.19	100	10194.47	-12.01	12.01 S	83.36 W	84.23	261.80	0.54	-0.20	-5.49
	10300.00	4.74	285.58	100	10294.10	-9.05	9.05 S	91.45 W	91.90	264.35	0.86	-0.43	-8.61
	10400.00	3.46	269.97	100	10393.84	-7.95	7.95 S	98.45 W	98.77	265.39	1.69	-1.28	-15.61
	10500.00	3.21	277.76	100	10493.67	-7.57	7.57 S	104.24 W	104.52	265.85	0.52	-0.25	7.79
	10600.00	2.74	270.57	100	10593.54	-7.17	7.17 S	109.41 W	109.64	266.25	0.60	-0.47	-7.19
	10700.00	2.40	238.74	100	10693.44	-8.23	8.23 S	113.59 W	113.89	265.86	1.45	-0.34	-31.83
	10800.00	2.38	198.28	100	10793.36	-11.29	11.29 S	116.03 W	116.58	264.44	1.65	-0.02	-40.46
	10900.00	1.77	160.70	100	10893.30	-14.72	14.72 S	116.17 W	117.10	262.78	1.46	-0.61	-37.58
	11000.00	2.82	204.52	100	10993.22	-18.41	18.41 S	116.68 W	118.13	261.03	1.97	1.05	43.82
	11100.00	3.44	197.28	100	11093.08	-23.52	23.52 S	118.59 W	120.90	258.78	0.73	0.62	-7.24
	11200.00	4.65	204.29	100	11192.83	-30.08	30.08 S	121.15 W	124.83	256.06	1.30	1.21	7.01
	11300.00	4.47	214.90	100	11292.51	-36.97	36.97 S	125.05 W	130.40	253.53	0.86	-0.18	10.61
	11400.00	4.88	228.23	100	11392.18	-43.00	43.00 S	130.45 W	137.35	251.76	1.16	0.41	13.33
	11527.00	4.15	244.21	127	11518.79	-48.59	48.59 S	138.62 W	146.89	250.68	1.14	-0.57	12.58

District I
1626 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
911 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form: C-102
August 1, 2011
Permit 223646

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number 30-025-43361	2. Pool Code 83600	3. Pool Name RED HILLS;WOLFCAMP (GAS)
4. Property Code 316516	5. Property Name SALADO DRAW 10 W1DM FEE COM	6. Well No. 002H
7. OGRID No. 14744	8. Operator Name MEWBOURNE OIL CO	9. Elevation 3330

10. Surface Location

UL - Lot D	Section 10	Township 26S	Range 33E	Lot Idn D	Feet From 310	N/S Line N	Feet From 330	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

11. Bottom Hole Location If Different From Surface

UL - Lot M	Section 10	Township 26S	Range 33E	Lot Idn M	Feet From 330	N/S Line S	Feet From 330	E/W Line W	County Lea
12. Dedicated Acres 640.00			13. Joint or Infill		14. Consolidation Code			15. Order No.	

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION
	<i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location(s) or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i>
	E-Signed By: Monty Whetstone Title: Vice President Operations Date: 7/19/2016
	SURVEYOR CERTIFICATION
	<i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>
	Surveyed By: Robert Howett Date of Survey: 10/24/2014 Certificate Number: 19680