

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-23499	☒
5. Indicate Type of Lease STATE ☒ FEE ☐	☒
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name State 36	☒
8. Well Number 2	☒
9. OGRID Number 213190	☒
10. Pool name or Wildcat Undes, Baum, Upper Penn	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☒ **HOBBS OCD**

2. Name of Operator
CrownQuest Operating, LLC

JAN 11 2017

3. Address of Operator
P.O. Box 53310, Midland, TX 79710

RECEIVED

4. Well Location
Unit Letter **F**: **1980** feet from the **North** line and **1980** feet from the **West** line
Section **36** Township **13S** Range **32E** NMPM County **Lea**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4292' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUEN

REMEDIAL WORK
COMMENCE DRILLING OPN
CASING/CEMENT JOB

INT TO PA **Pm. x**
P&A NR
P&A R

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Set CIBP @ 9700' w/ 20 sxs cmt. Circulate hole w/ mud laden fluid. **Pr**

60s 2. Perf & sqz 50 sxs @ 6800-6700'. WOC & TAG

3. Cut & pull 5 1/2 csg @ 4150'.

70s 4. Spot 65 sxs @ ~~4100-4000'~~ **4200' - 4000'** WOC & TAG **Pressure test casing**

60s 5. Perf & Sqz 44 sxs @ 2600-2500'. WOC & TAG

6. Perf & Sqz 44 sxs @ 1600-1500'. WOC & TAG

7. Perf & Sqz 60 sxs @ 415-315'. WOC & TAG

8. Perf & Sqz 45 sxs @ 100' to surface.

9. Cut off well head, weld on Dry Hole Marker.

Verify cement to surface all strings

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ben mty TITLE Agent DATE 1-10-17

Type or print name Ben Montgomery E-mail address: Benm@bcmassociates.com PHONE: 432-580-7161

For State Use Only


APPROVED BY: Mable Pitman TITLE Petroleum Engr. Specialist DATE 01/11/2017

Conditions of Approval (if any):

State 36 # 2

Property#: 10021

API # 3002523499

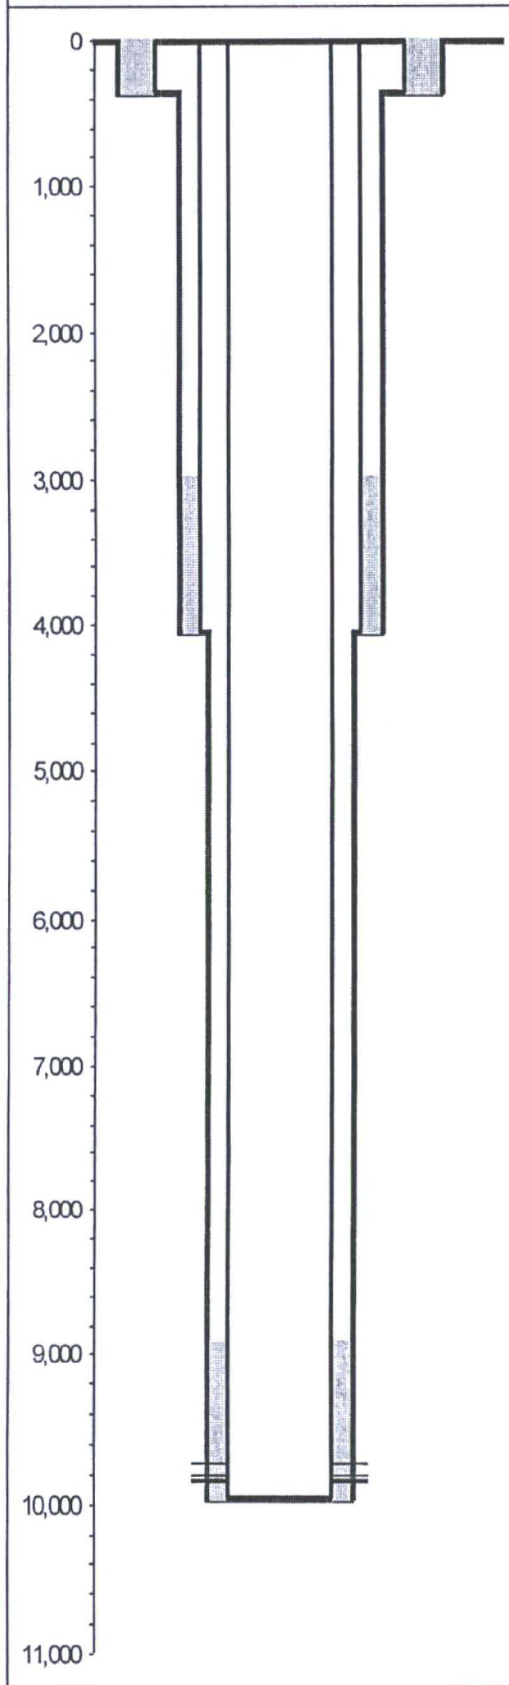

1980' FNL & 1980' FWL

GL Elev: 4,292.60

KOP:

EOC:

County, State: Lea, NM

Fill Depth:

Aux ID: 200999-02

PBTD:

9,904.00

KB = ; DF = ; All Depths Corr To:

TD:

9,950.00

BOP:

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	365.00	5/5/1970
11.0000	365.00	4,050.00	5/11/1970
7.8750	4,050.00	9,950.00	5/31/1970

Surface Casing

Date Ran: 5/5/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	11	13.3750	48.00	H40	365.00	0.00	365.00

Intermediate Casing

Date Ran: 5/11/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	112	8.6250	32.00	J55	4,050.00	0.00	4,050.00

J-55 24# & 32# LT&C and ST&C

Production Casing String 1

Date Ran: 5/31/1970

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	296	5.5000	17.00	J55	9,950.00	0.00	9,950.00

J-55 & N-80

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
350	H		13.375	17.500	0.00	365.00	Circ
300	C		8.625	11.000	2,988.00	4,050.00	Calc
200	C		5.500	7.875	8,911.00	9,950.00	Calc

Zone and Perfs

Penn

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,726.00	9,730.00	PENN	A			2	10
(2 spf, 10 holes) 9726' - 9730'							
9,808.00	9,830.00	PENN	A			1	23
(1 spf, 23 holes) 9808' - 9830'							
9,835.00	9,848.00	PENN	A			1	14
(1 spf, 14 holes) 9835' - 9848'							

Lat 33.1499825

Long -103.6732101

Wellbore Schematic (From Surface to TD)

Printed: 1/9/2017

Page 3

State 36 # 2

Property#: 10021

API # 3002523499

