

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO. 30-025-29686
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name CH Weir A
8. Well Number: 19
9. OGRID Number 4323
10. Pool name or Wildcat Skaggs, Drinkard

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other	
2. Name of Operator Chevron USA INC	
3. Address of Operator 6301 DEAUVILLE BLVD., MIDLAND, TX 79706	
4. Well Location Unit Letter <u>F</u> : 1980 feet from the <u>NORTH</u> line and <u>1651</u> feet from the <u>West</u> line Section <u>12</u> Township <u>20S</u> Range <u>37E</u> NMPM County <u>Lea</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3564' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT
REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐

INT TO PA ☒
P&A NR
P&A R

OTHER: ☐

OTHER: TEMPORARILY ABANDON ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 11 3/4" 42# @ 1412' TOC surface, 8 5/8" 32# @ 4000' TOC surface, 5 1/2" 15.5# & 17# @ 7200' TOC surface, Perfs 6614'-6930' 1428'

Chevron USA INC respectfully request to abandon this well as follows:

1. MIRU, NDWH, NU BOPE.
2. POOH with all rods and tubing if present.
3. Set CIBP between 6613'-6513', circulate well with 9.5 ppm salt gel and spot 25 sx ~~DR~~ of CL "C" cement on top of BP (perfs, drunkard, ABO).
4. Spot 25 sx cement plug at 6308'-6108' (Tubb).
5. Spot 25 sx cement plug at 5788'-5588' (Blincy).
6. Spot 25 sx cement plug at 5332'-5060' (Paddock, Glorieta). - WOC & TAG (DV Tool)
3557. Spot 25 sx cement plug at 4050'-3850' (8 5/8" shoe). / Grayhurst WOC & TAG
8. Spot 60 sx cement plug at 2630'-2430' (base of Salt), WOC & tag.
9. Spot 40 sx cement plug at 1520'-1200' (top of Salt, 11 3/4" shoe, Any), WOC & tag.
10. Spot 40 sx cement from 300' to surface. 1478' - 1200'
11. Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location.

Note: All cement plugs class "C" with closed loop system used.

VERIFY CMT ALL STRINGS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Engineer DATE 7/6/17

Type or print name Ricky Spiller E-mail address: rcspiller@chevron.com PHONE: (432) 687-7479


For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 07/12/2017

Conditions of Approval (if any):

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS


Proposed Wellbore
CH Weir 19 # 1

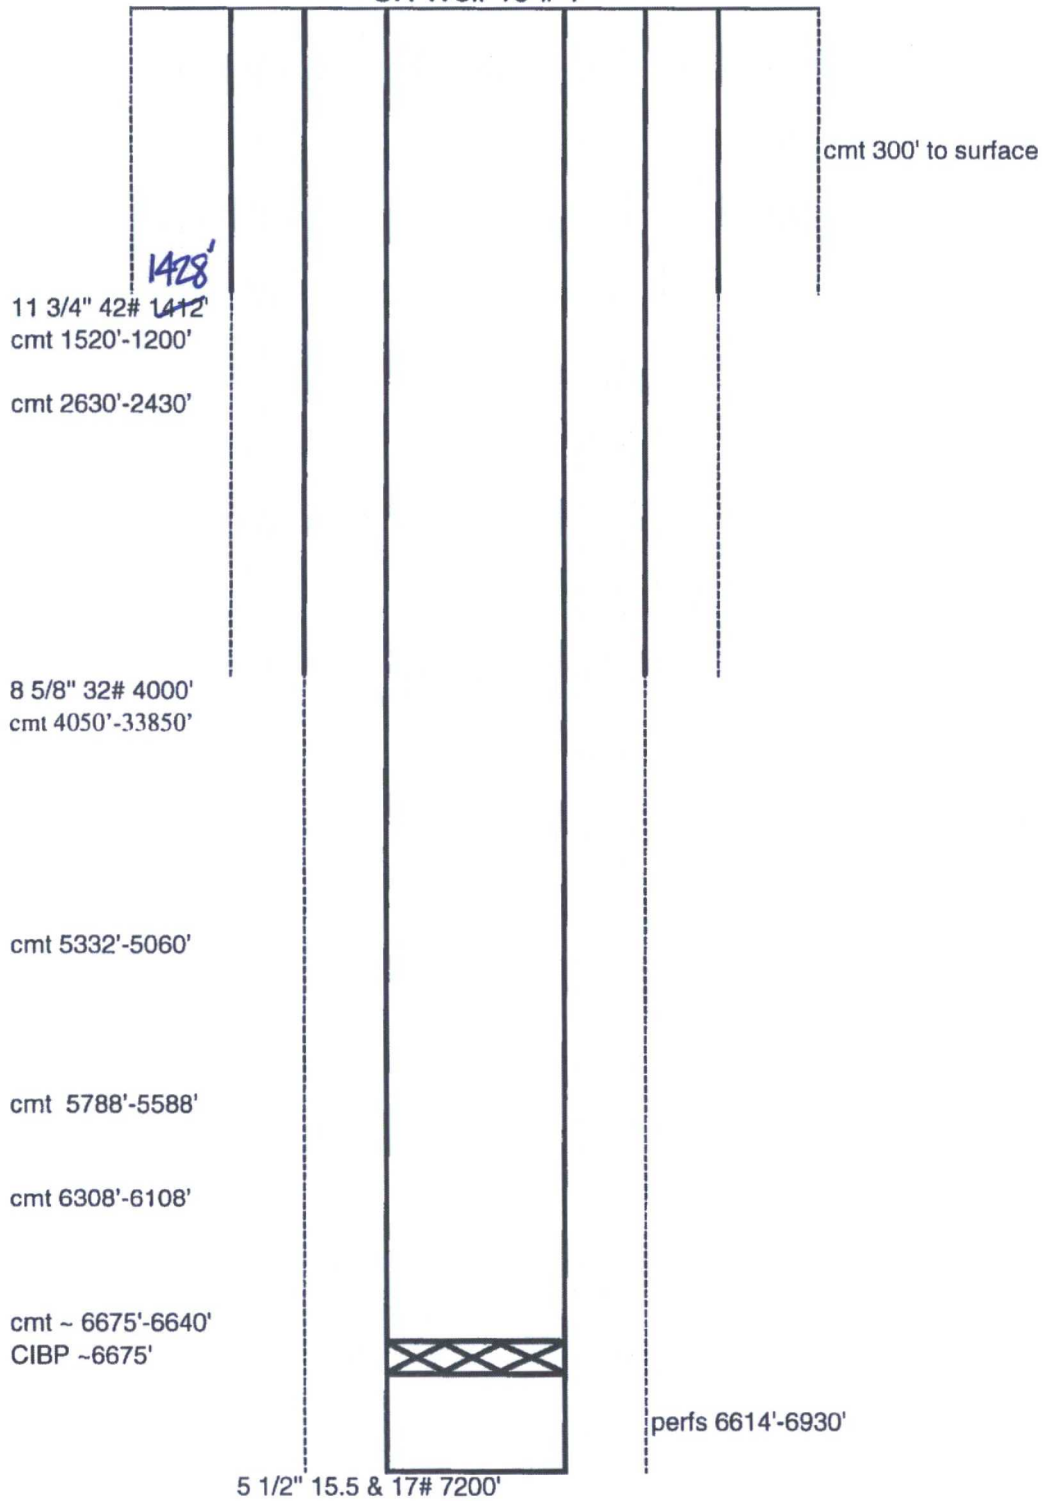

Chevron U.S.A. Inc. Wellbore Diagram : WEIRCHA19



[Lease] OHO HOBBS FMT [Well No.] WEIR C. H. -A- 19 [Field] Z - FLD-SKAGGS
 [Location] 1980FNL1651FWL [Sec.] N/A [Blk] _____ [Survey] N/A
 [County] Lea [St.] New Mexico [Refno] IF2332 [API] 3002529686 [Cost Center] UCL211300
 [Section] E037 [Township] 12 S [Range] S020 E
 [Current Status] ACTIVE [Dead Man Anchors Test Date] 06/04/2007
 [Directions] _____

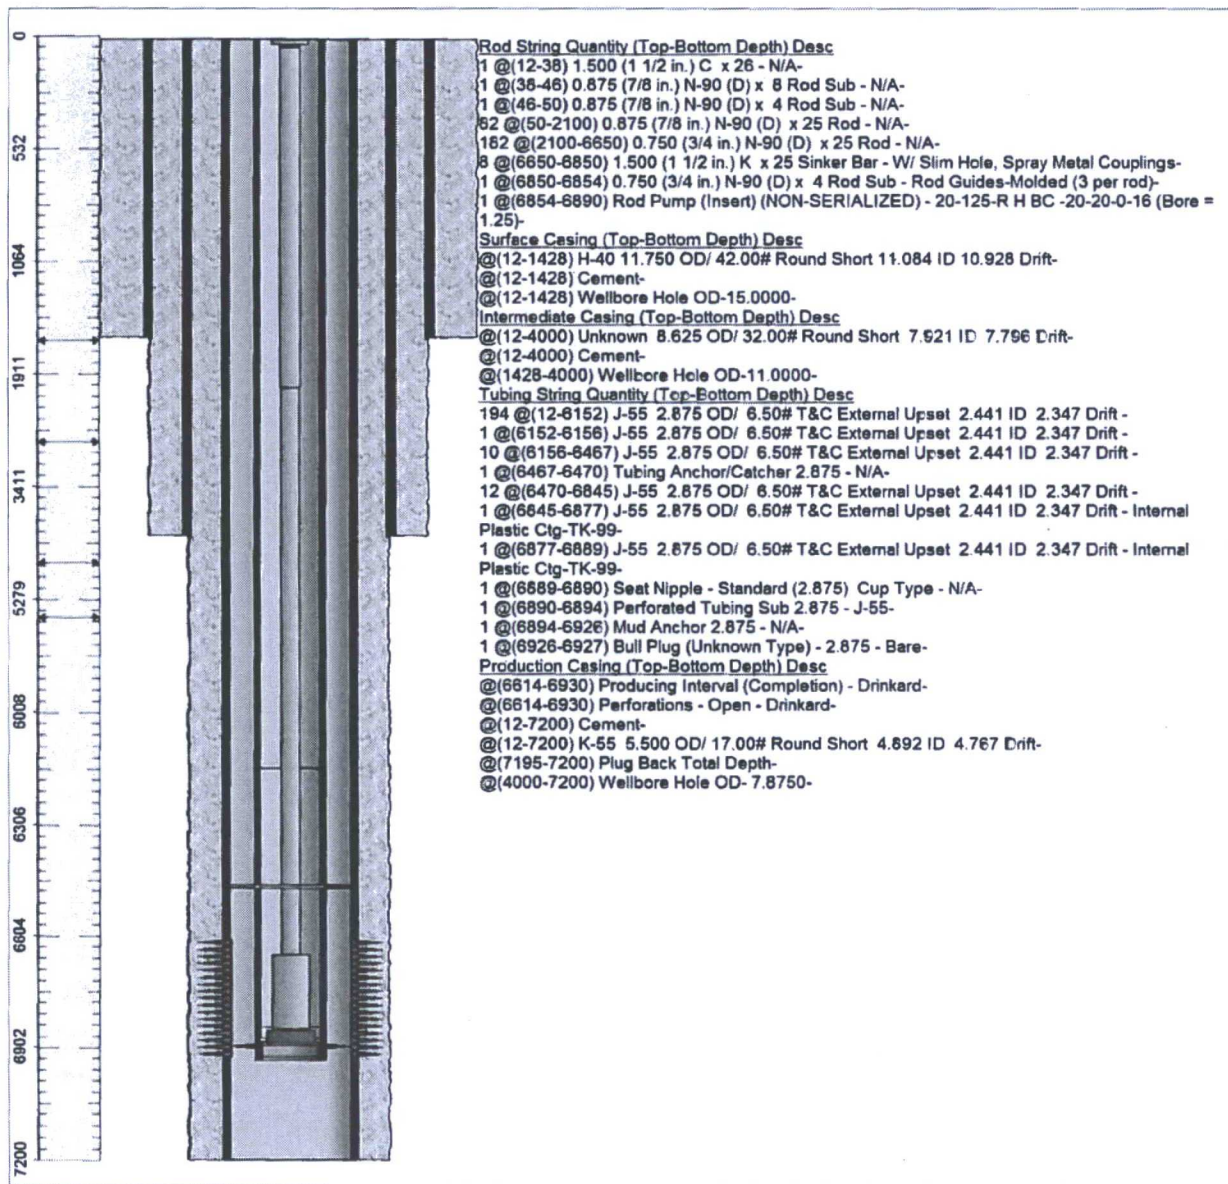

[Ground Elevation (MSL)] 3564.00 [Spud Date] 06/27/1986 [Compl. Date] 01/01/1970
 [Well Depth Datum] Kelly Bushing [Elevation (MSL)] 0.00 [Correction Factor] 12.00
 [Last Updated by] rodgekl [Date] 10/14/2016
 [null] null [null] null