

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-37909 ✓
1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐ ✓
2. Name of Operator Blackbeard Operating, LLC.		6. State Oil & Gas Lease No.
3. Address of Operator 201 W Wall Street Suite 900, Midland TX 79701		7. Lease Name or Unit Agreement Name State A A/C 2 ✓
4. Well Location Unit Letter <u>L</u> : <u>1930</u> feet from the <u>S</u> line and <u>660</u> feet from the <u>W</u> line Section <u>8</u> Township <u>22S</u> Range <u>36E</u> NMPM County <u>Lea</u> ✓		8. Well Number <u>94</u> ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,598' GL		9. OGRID Number 370767 ✓
		10. Pool name or Wildcat Jalmat, Tan-Yates, 7 Rvrs (pro gas) ✓

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQ	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK	INT TO PA <u>Pm</u> ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING	P&A NR ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB	P&A R ☐
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU plugging company. ND wellhead. NU BOP. POOH w/ production equipment.
2. Spot 25 sx cement on top of CIBP (set in 2008 @ 3,062') @ 3,062' - 3,012'
3. Perf & sqz 40 sx @ 705' - 655' WOC & Tag.
4. Spot 5 sx of cmt @ surface.
5. Cut off wellhead and weld on dry hole marker.

CIRC MLF + Test Csg.
Spot 60 sx at 1450' (T. salt + Shoe) Tag at 555' OR BETTER
Perf at 100'. Circ cmt to surface

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Ian Smith

TITLE

VP-Permian Basin

DATE

11/17/2017

Type or print name

Ian Smith

E-mail address:

ismith@blackbeardoperating.com

PHONE:

432.242.0050

For State Use Only

APPROVED BY:

Mark Whitaker

TITLE

Petroleum Engr. Specialist

DATE

12/6/2017

Conditions of Approval (if any):

State A A/C-2 #94
Jalmat Field
Lea, NM
API: 30-025-37909




BLACKBEARD
OPERATING

K.B. Elev. 3,603'
Ground Level 3,598'

Spud Date: 8/15/2006

Surface Casing

8-5/8" 24# @ 605' w/ 300 sx cmt. TOC @ surface

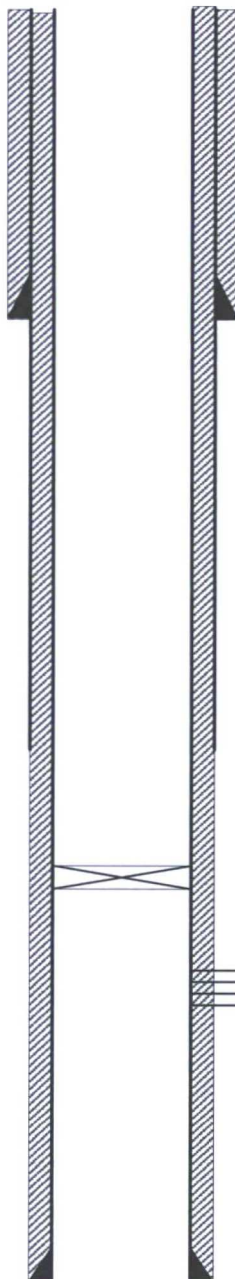

Tubing Detail:

Rod Detail:

CIBP @ 3,062' (11/12/2008)

Perforations
3,113' - 3,625'

11.6 #

Production Casing

4-1/2" 12# @ 4,019' w/ 1420 sx cmt, TOC @ surface

TD - 4,000'
PBTD - 3,062'

RUSTLER 1408'
TANSILL 3104'

Last Dated: 11/17/2017
Author: ids

State A A/C-2 #94
Jalmat Field
Lea, NM
API: 30-025-37909

K.B. Elev. 3,603'
Ground Level 3,598'

Spud Date: 8/15/2006

Surface Casing

8-5/8" 24# @ 605' w/ 300 sx cmt. TOC @ surface

PROPOSED



**BLACKBEARD
OPERATING**

Class 'C' Cement Plug
Surface; 5 sx

Perforate @ 655'
Sqz 40 sks
WOC & Tag

Class 'C' Cement Plug
3,062' - 3,012'; 25 sx
WOC & Tag

CIBP @ 3,062' (11/12/2008)

Perforations
3,113' - 3,625'

Production Casing

4-1/2" 12# @ 4,019' w/ 1420 sx cmt, TOC @ surface

TD - 4,019'
PBTD - 3,062'

Last Dated: 11/17/2017
Author: ids