

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO. 30-025-33587
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name West Vacuum Unit
8. Well Number: 56
9. OGRID Number 4323
10. Pool name or Wildcat Vacuum Grayburg - San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Chevron USA INC

3. Address of Operator
6301 DEAUVILLE BLVD., MIDLAND, TX 79706

4. Well Location

Unit Letter O : 100 feet from the South line and 2,450 feet from the East line
Section 34 Township 17S Range 34E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4,030' GL, 4,047' KB

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUEN

REMEDIAL WORK
COMMENCE DRILLING OPNS
CASING/CEMENT JOB

INT TO PA PM
P&A NR _____
P&A R _____

OTHER: ☐

OTHER:

TEMPOI

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 8-5/8" @ 1,555' TOC Surface, 5-1/2" @ 4,800' TOC Surface, Perforations 4,558'-4,712', CIBP @ 4,490'.

Chevron USA INC respectfully request to abandon this well as follows:

1. Call and notify NMOCD 24 hrs before operations begin.
2. MIRU, NDWH, NU BOPE.
3. Test csg, tag CIBP @ 4,490', spot MLF, spot 45 sx CL "C" cmt f/ 4,490' t/ 4,061', WOC & tag ONLY IF CASING DOES NOT TEST (Perfs, Grayburg).
4. Spot 25 sx CL "C" cmt f/ 3,842' t/ 3,589' (Queen).
5. Spot 55 sx CL "C" cmt f/ 3,244' t/ 2,737' (7 Rivers, Yates).
6. Spot 160 sx CL "C" cmt f/ 1,605' t/ Surface (Shoe, Salt, Surf).
7. Cut all casings & anchors & remove 3' below grade. Verify cement to surface & weld on dry hole marker. Clean location.

Note: All cement plugs class "C" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Well Abandonment Engineer, Attorney-in-Fact DATE 1/10/18

Type or print name Howie Lucas E-mail address: howie.lucas@chevron.com PHONE: (832)-588-4044

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 01/11/2018
Conditions of Approval (if any):

WVU #56 Wellbore Diagram

Created:	09/22/08	By:	JSS
Updated:	09/22/08	By:	JSS
Updated:	01/10/18	By:	H Lucas
Lease:	Vacuum Grayburg San Andres Unit		
Field:	same		
Surf. Loc.:	100' FSL, 2450' FEL		
Bot. Loc.:			
County:	Lea	St.:	NM
Status:	Temp. Abandoned		

Well #:	56	St. Lse:	B-1030
API	30-025-33587		
Unit Ltr.:	O	Section:	34
TSHP/Rng:	S-17 E-34		
Unit Ltr.:	Section:		
TSHP/Rng:			
Directions:	Buckeye, NM		
	Chevno: BK8936		

Surface Casing

Size:	8-5/8"
Wt., Grd.:	24#
Depth:	1555'
Sxs Cmt:	550sx
Circulate:	yes
TOC:	surface
Hole Size:	11"

KB:	4047'
DF:	4030'
GL:	4046'
Ini. Spud:	10/24/96
Ini. Comp.:	11/20/96

Production Casing

Size:	5-1/2"
Wt., Grd.:	17#
Depth:	4800'
Sxs Cmt:	1100sx
Circulate:	yes
TOC:	surface
Hole Size:	7-7/8"


FORMATION TOPS	
Rustler	1554'
Salt	1691'
Tansil	2745'
Yates	2837'
Seven Rivers	3194'
Queen	3792'
Grayburg	4161'
San Andres	4527'

Perforations:

4558-60, 68-78, 85-91, 4638-41,
46-52, 59-62, 66-88, 90-94,
98-4712' w/4 JSPF (276 holes).

CIBP @ 4490' (no report of cmt cap)

Perfs: 4558-4712'
w/4 JSPF.

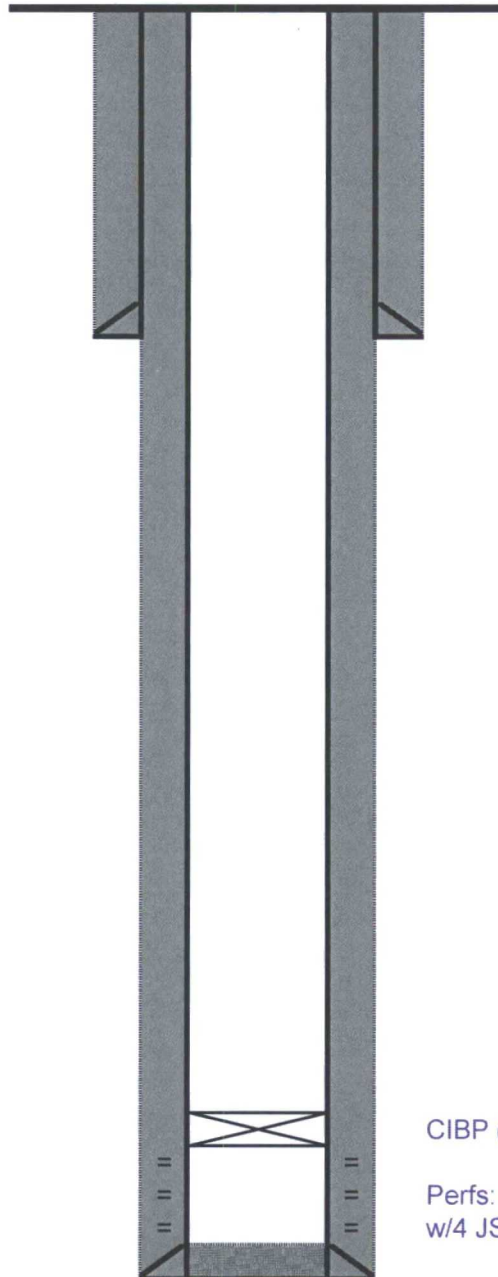

4750' PBTB
4800' TD

WVU #56 Wellbore Diagram

Created: 09/22/08 By: JSS
 Updated: 09/22/08 By: JSS
 Updated: 01/10/18 By: H Lucas
 Lease: Vacuum Grayburg San Andres Unit
 Field: same
 Surf. Loc.: 100' FSL, 2450' FEL
 Bot. Loc.:
 County: Lea St.: NM
 Status: Temp. Abandoned

Well #: 56 St. Lse: B-1030
 API: 30-025-33587
 Unit Ltr.: O Section: 34
 TSHP/Rng: S-17 E-34
 Unit Ltr.: Section:
 TSHP/Rng:
 Directions: Buckeye, NM
 Chevno: BK8936

Surface Casing

Size: 8-5/8"
 Wt., Grd.: 24#
 Depth: 1555'
 Sxs Cmt: 550sx
 Circulate: yes
 TOC: surface
 Hole Size: 11"

KB: 4047'

DF: 4030'

GL: 4046'

Ini. Spud: 10/24/96

Ini. Comp.: 11/20/96

Production Casing

Size: 5-1/2"
 Wt., Grd.: 17#
 Depth: 4800'
 Sxs Cmt: 1100sx
 Circulate: yes
 TOC: surface
 Hole Size: 7-7/8"

FORMATION TOPS	
Rustler	1554'
Salt	1691'
Tansil	2745'
Yates	2837'
Seven Rivers	3194'
Queen	3792'
Grayburg	4161'
San Andres	4527'

Perforations:

4558-60, 68-78, 85-91, 4638-41,
 46-52, 59-62, 66-88, 90-94,
 98-4712' w/4 JSPF (276 holes).

