

HOBBS OCD

FEB 20 2018

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-041-20619

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement

TAYLOR

8. Well Number 001

9. OGRID Number

370922

10. Pool name or Wildcat

DORA; PENN, NORTH

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐

2. Name of Operator

REMNANT OIL OPERATING, LLC

3. Address of Operator

PO BOX 5375, Midland, TX 79704

4. Well Location

Unit Letter G : 2280 feet from the N line and 2130 feet from the E line

Section 29 Township 04S Range 33E NMPM County ROOSEVELT

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

4274 GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUEN

REMEDIAL WORK
COMMENCE DRILLING OP
CASING/CEMENT JOB

OTHER: ☐

INT TO PA Pm

P&A NR

P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Remnant Oil Operating is planning on plugging the Taylor #1 pending NMOCD approval. Please find attached a "Current Wellbore Diagram" as well as a "Proposed" post P&A wellbore diagram. Remnant will clean out wellbore fill covering perforations (if any). This well will be plugged in accordance with NMOCD's "Conditions of Approval for Plugging & Abandonment"

NOTE CHANGES
TO PROCEDURE

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Carie Stoker TITLE Regulatory Affairs Coordinator DATE: 02/16/2018

Type or print name Carie Stoker E-mail address: carie@stokeroilfield.com PHONE: 432.664.7659

APPROVED BY: Mark W. Hite TITLE Petroleum Engr. Specialist DATE 02/26/2018

Conditions of Approval (if any):

C103 INTENT TO P&A EXPIRES
02-26-2019

Remnant Oil Operating

Well: Taylor #1

API #: 30-041-20619

Location: Roosevelt County, NM

Sect: 29, 4-5, 33-E, 2280 FNL + 2130 FEL

Current Wellbore Status 01/2019

Hole: 17-1/2"

CSG: 13-3/8" @ 345'
CMT: 425SX Circ to Surface

12-1/4"

CSG: 9-5/8" @ 1895'
CMT: 240SX Circ to Surface

TOC: 6128' (calc)

7-7/8"

Perm Perfs @ 8086'-8109'

CSG: 5-1/2" @ 8,250'
CMT: 400SX TOC @ 6128' (calc)

TD: 8250'
PBD: 8167'

Remnant Oil Operating

Well: Taylor #1

API #: 30-041-20619

Location: Roosevelt County, NM

Sec. 29, 4-S 33-E, 2280 FNL + 2130 FEL


Proposed P&A Wellbore Diagram

Hole: 17-1/2"

12-1/4"

TOC: 6,128' (calc)

7-7/8"

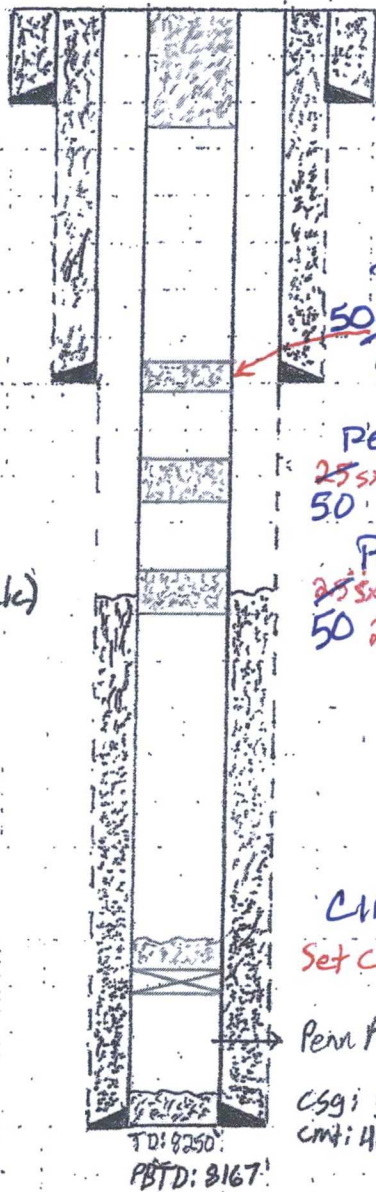

Cmt Plug from 400' - Surface

CSG: 13-3/8" @ 345'

Cmt: 425sx Circ to Surface OK

PERF @ 395' Circ
Cmt to Surface

PERF: SQUEEZE

50 25sx cmt plug from 1947' - 1700'

CSG: 9-5/8" @ 1895'

Cmt: 240sx Circ to Surface

Perf: 50Z

25sx cmt plug from 3747' - 3500'

50

Perf: 50Z

25sx cmt plug from 6150' - 5903'

50 25sx ≈ 24.7' in 5.5" 15# csg

CIRC MLF Pressure test csg.

Set CIBP @ 8,000' w/ 25sx cmt on top

Perm Perfs @ 8086' - 8109'

CSG: 5-1/2" @ 8,250'

Cmt: 400sx TOC @ 6,128' (calc.)

TD: 8250'

PBD: 8167'