

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-34948
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Grama Ridge East 34 State
8. Well Number 1
9. OGRID Number 372137
10. Pool name or Wildcat Grama Ridge; Bone Spring NE
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3704' GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

Chisholm Energy Operating, LLC

3. Address of Operator

801 Cherry St., Ste 1200, Unit 20, Fort Worth, TX 76102

4. Well Location

Unit Letter **H** : **1548** feet from the **N** line and **990** feet from the **E** line
Section **34** Township **21S** Range **34E** NMPM County **LEA**

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL. ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT

REMEDIAL WORK
COMMENCE DRILLING OPNS.
CASING/CEMENT JOB

INT TO PA **PM**
P&A NR _____
P&A R _____

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Tag 7" CIBP @ 9030' +/- Circulate hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ ~~8500-8400'~~ **9030'**.
2. Perf & Sqz 50 sx cmt @ 5813-5663'. WOC & Tag (9 5/8" Shoe)
3. Perf & Sqz 50 sx cmt @ 3900-3800'. (B/Salt)
4. Perf & Sqz 50 sx cmt @ 1346-1246'. WOC & Tag (13 3/8" Shoe)
5. Perf & Sqz 50 sx cmt @ 350-250'. WOC & Tag
6. Perf & Sqz 30 sx cmt @ 60'-Surface.
7. Cut off well head, verify cmt to surface, weld on Dry Hole Marker.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Abigail Montgomery TITLE Agent DATE 4/23/18
Type or print name Abigail Montgomery E-mail address: abym@bcrmandassociates.com PHONE: 432-580-7161
For State Use Only
APPROVED BY: Mahesh Patel TITLE P.E.S. DATE 04/24/2018
Conditions of Approval (if any):

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

C103 INTENT TO P&A EXPIRES
1 YEAR FROM DATE OF APPROVAL

CURRENT WELLBORE DIAGRAM

LEASE: Grama Ridge East 34 State #1	WELL: #1	FIELD: Grama Ridge East	API: 30-025-34948
LOC: 1548' ENL & 990' FEL	SEC: 34	BLK: T 21S R34E	Reservoir: Bone Springs Carbonate
SVY:	GL: 3689	CTY/ST: Lea / NM	SPUD: 3/7/2000
CURRENT STATUS: TA'd	KB: 3706	DF: 3705	TD DATE: 4/28/2000
			COMP. DATE: 6/9/2000

FRESH WATER
DEPTH:

HOLE SIZE: 17.5"
SURF CSG & SIZE: 13-3/8" 68# K-55
SET @: 1296'
SXS CMT: 872 sx
CIRC: Yes: 54 sx
TOC AT: Surf.
TOC BY: Circ.


COMMENTS:

TBG:
JTS:
SN:
TAC:
ROD SIZE:

HOLE SIZE: 12.25"
INT. CSG & SIZE: 9-5/8" 36&40# K-55/N80/S95
SET @: 5763'
SXS CMT: 1st stage=403 sx 2nd stage=1500 sx
CIRC: Yes: 210 sx
TOC AT: Surf.
TOC BY: Circ.

PKR:
TYPE:

OH ID:
COTD:
PBTD: 8995
TD: 13500

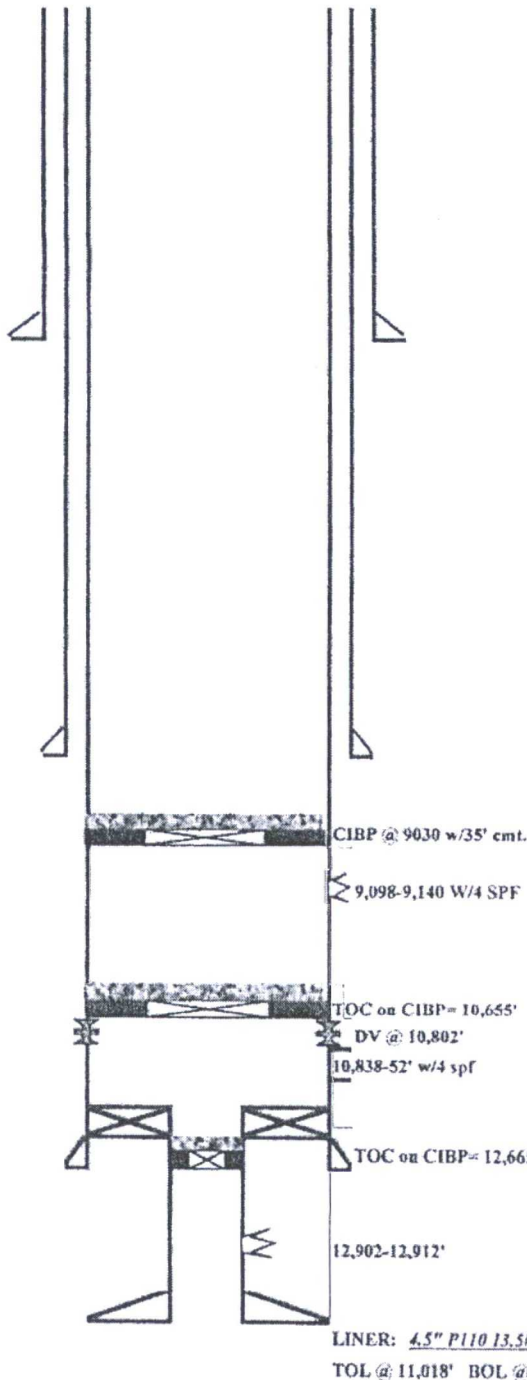

HOLE SIZE: 8-3/4"
PROD. CSG & SIZE: 7" 23/26/29# N-80 & S-95
SET @: 11,250'
SXS CMT: 1st stage=90 sx 2nd stage=90 sx
CIRC: no
TOC AT: 6910
TOC BY:

hanger @ 11,016' cmt w/350 sx H, tested 2500#

CURRENT WELLBORE DIAGRAM


LEASE: Grama Ridge East 34 State #1	WELL: #1	FIELD: Grama Ridge East	API: 30-025-34948
LOC: 1548' FNL & 990' FEL	SEC: 34	BLK: T 21S R34E	Reservoir: Bone Springs Carbonate
SVY:	GL: 3689	CTY/ST: Lea / NM	SPUD: 3/7/2000
CURRENT STATUS: TA'd	KB: 3706	DF: 3705	TD DATE: 4/28/2000
			COMP. DATE: 6/9/2000

FRESH WATER
DEPTH:

TBG:
JTS:
SN:
TAC:
ROD SIZE:

PKR:
TYPE:

OH ID:
COTD:
PBTD: 8995
TD: 13500

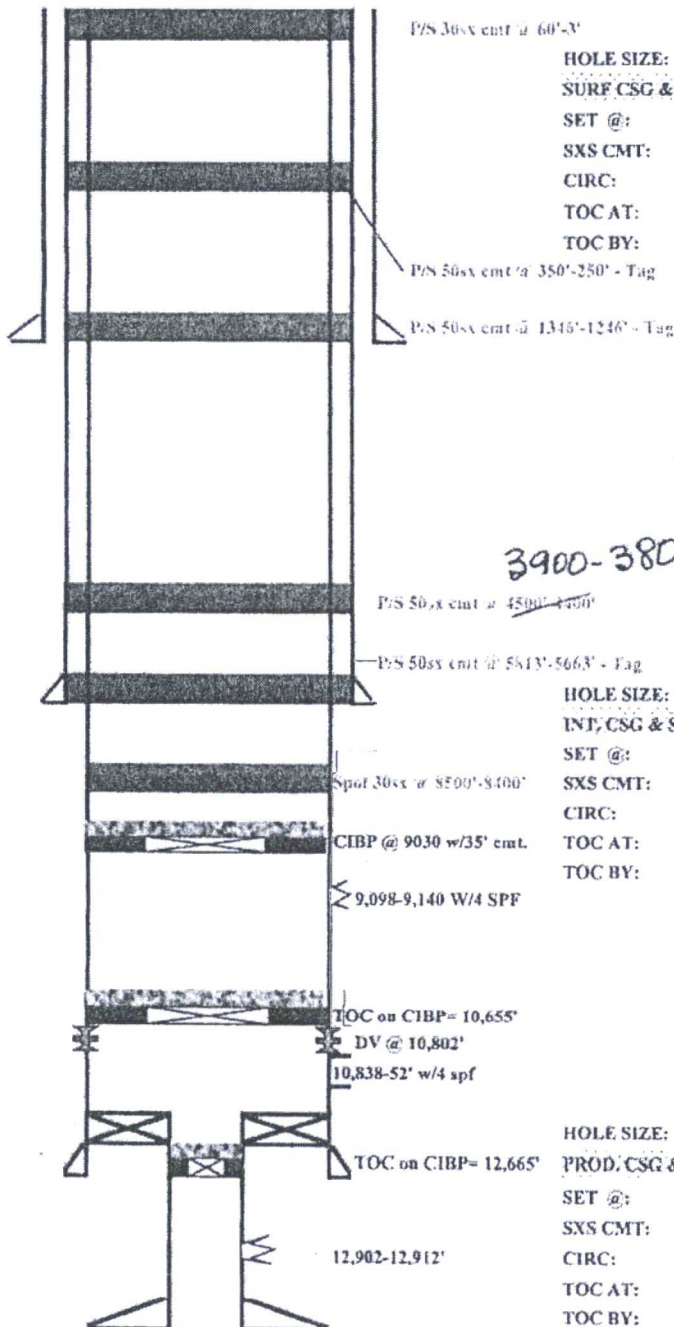

HOLE SIZE: 17.5"
SURF CSG & SIZE: 13-3/8" 68# K-55
SET @: 1296'
SXS CMT: 872' sx
CIRC: Yes: 54' sx
TOC AT: Surf.
TOC BY: CIRC.

COMMENTS:

HOLE SIZE: 12.25"
INT. CSG & SIZE: 9-5/8" 36&40# K-55/N80/S95
SET @: 5763'
SXS CMT: 1st stage=403' 2nd stage=1500' sx
CIRC: Yes: 210' sx
TOC AT: Surf.
TOC BY: CIRC.

HOLE SIZE: 8-3/4"
PROD. CSG & SIZE: 7" 23/26/29# N-80 & S-95
SET @: 11,250'
SXS CMT: 1st stage=90' 2nd stage=90' sx
CIRC: no
TOC AT: 6910
TOC BY:

LINER: 4.5" P110 13.5#
TOL @ 11,018' BOL @ 13,500'

hanger @ 11,016' cement w/350' sx H, tested 2500#