

Submit 1 Copy To Appropriate District Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-34191
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Chevron USA, Inc.		6. State Oil & Gas Lease No.
3. Address of Operator 6301 Deauville Blvd., Midland, TX 79706		7. Lease Name or Unit Agreement Name Monument 12 State
4. Well Location Unit Letter C : 1200 feet from the NORTH line and 1350 feet from the WEST line Section 12 Township 19S Range 36E NMPM County Lea		8. Well Number: 14
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3741' GL		9. OGRID Number 4323
		10. Pool name or Wildcat Monument, Abo, North; Monument, Drinkard, North

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUEN
REMEDIAL WORK
COMMENCE DRILLING OPN:
CASING/CEMENT JOB

INT TO PA PM
P&A NR
P&A R

OTHER: ☐

OTHER: _____

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 11 3/4" 42# @ 400': TOC @ surface; 8 5/8" 24# @ 2840': TOC @ surface; 5 1/2" 15.5# @ 7153': TOC @ 3400' (Temp Survey)

Chevron USA INC respectfully requests to abandon this well as follows:

1. MIRU, pull rods, N/U BOPE, pull tubing
2. Set CIBP @ 7100'. Circulate 9.5 ppg gel KCl and pressure test casing to 1000 psi for 10 minutes.
3. Spot 35 sx CL C cement f/ 7100' t/ 6800' (Abo, Squeezed Perfs). If pressure test in Step 2 was successful, do not WOC. If pressure test in Step 2 was unsuccessful, WOC & tag, then attempt to pressure test again.
4. Spot 185 sx CL C cement f/ 5328' t/ 3623' (Bone Spring, Delaware, San Andres, Grayburg, Queen)
5. P/S 200 sx CL C cement f/ 3133' t/ 2539' (7 Rivers, Shoe, Yates, B. Salt). WOC & tag
6. P/S 50 sx CL C cement f/ 1500' t/ 1350' (T. Salt). WOC & tag 1500' t/ 1350'
7. P/S 155 sx CL C cement f/ 450' t/ surface
8. Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location.
9. All cement plugs class "C" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

5/25/2018

X Nick Glann

Nick Glann
Well Abandonment Engineer

**NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS**

SIGNATURE
For State Use Only
Signed by: Nick Glann

E-mail address: nglann@chevron.com PHONE: 432-687-7786

APPROVED BY: Mark Whitaker TITLE: Petroleum Engr. Specialist DATE: 05/31/2018

Conditions of Approval (if any):

**C103 INTENT TO P&A EXPIRES
1 YEAR FROM DATE OF APPROVAL**

Well: **Monument 12-14**
Field: **Monument North**

Reservoir: **Abo**

Current
Wellbore Diagram

Location:

Section: 12
Township: 19
Range: 36
County: Lea State: NM

Well ID Info:

Chevron: BP3676
API No: 3002534191


Spud Date: 11/25/1997
Compl. Date: 2/25/1998

Surface Csg: 11 3/4", 42#, H-40
Set: @ 400' w/ 300 sks
Hole Size: 14 3/4"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Int. Csg: 8 5/8", 24#, K-55
Set: @ 2840' w/ 900sks
Hole Size: 11"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Prod. Csg: 5 1/2", 15.5#, K-55
Set: @ 7153' w/ 500 sks
Hole Size: 7 7/8"
Circ: No **TOC:** 3400
TOC By: Temperature Survey

Formation Name	TD, ft
	Top
T. Salt	1,550
B. Salt	2,639
Yates	2,790
Seven Rivers	3,083
Queen	3,723
Grayburg	4,073
San Andres	4,546
Delaware	4,872
Bone Spring	5,278
Abo	7,140

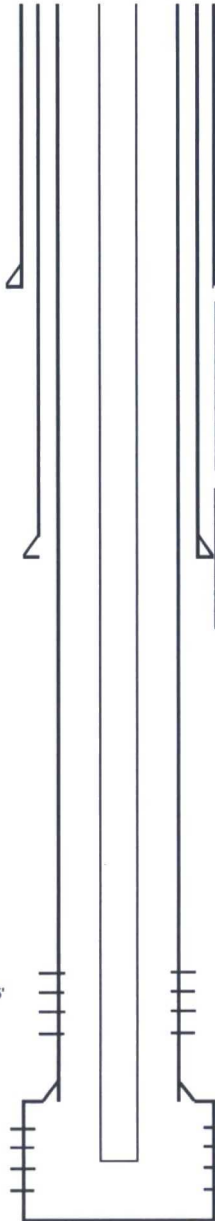

Tubing Detail (Top - Down)

Date	Part Type	Tubing Component	Joints	Max OD	Min ID	Weight	Grade	Top Depth
2/7/2017	Tubing - OD 2.875	L-80 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift	219	2.875	2.441	6.5	L-80	16
2/7/2017	Tubing Sub - OD 2.875	Marker Sub	1	2.875	2.441	6.5	L-80	6732
2/7/2017	Tubing - OD 2.875	L-80 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift	2	2.875	2.441	6.5	L-80	6736.1
2/7/2017	Tubing Anchor/Catcher	Tubing Anchor-Mechanical 5.500 Elder B	1	5.5	4.548	0	N/A	6799.1
2/7/2017	Tubing - OD 2.875	L-80 2.875 OD/ 6.40# T&C External Upset 2.441 ID 2.347 Drift	14	2.875	2.441	6.4	L-80	6801.8
2/7/2017	Tubing - OD 2.875	TK-99 IPC	2	2.875	2.441	0	Unknown	7242.8
2/7/2017	Seat Nipple / Shoe	Seat Nipple - Standard (2.875) Cup Type	1	2.875	0	0	N/A	7305.8
2/7/2017	Tubing Sub - OD 2.875	Upfit Sub	1	2.875	2.441	6.5	L-80	7306.9
2/7/2017	Bull Plug (Tubing)	Bull Plug (Unknown Type) - 2.875	1	2.875	0	3	N/A	7311
2/7/2017	Bull Plug (Tubing)	Slotted Mud Anchor 3.500	1	3.5	0	4.5	N/A	7311.6

Rod Detail (Top - Down)

Date	Part Type	Rod Component	Count	Size	Grade	Length	Top Depth	Bottom Depth
11/1/2012	Polished Rod	1.500 (1 1/2 in.) Spray Metal x 26	1	1.5	C	26	16	42
2/7/2017	Rod (Sub)	subs (2.6.6.8)	3	1	Unknown	16	42	58
2/7/2017	Rod	1.000 (1 in.) N-90 (D) x 25 Rod	85	1	N-90	2125	58	2183
2/7/2017	Rod	0.875 (7/8 in.) N-90 (D) x 25 Rod	109	0.875	N-90	2725	2183	4908
2/7/2017	Rod	0.750 (3/4 in.) N-90 (D) x 25 Rod	83	0.75	N-90	2075	4908	6983
2/7/2017	Rod (Sinker Bar)	1.500 (1 1/2 in.) K x 25 Sinker Bar - N/A	12	1.5	K	300	6983	7283
2/7/2017	Rod Guide	Stabilizer Sub (N-90)	1	2.5	N/A	4	7283	7287

Drinkard Perfs Sqz'ed Off @ 6900'-7005'

Abo Perfs @ 7152-7518'

Plug back fill 7492'

PBTD: 7492'
TD: 7518''

Well: **Monument 12-14**
Field: **Monument North**

Reservoir: **Abo**

Proposed
Wellbore Diagram

Location:

Section: 12
Township: 19
Range: 36
County: Lea State: NM

Well ID Info:

Chevno: BP3676
API No: 3002534191


Spud Date: 11/25/1997
Compl. Date: 2/25/1998

Surface Csg: 11 3/4", 42#, H-40
Set: @ 400' w/ 300 sks
Hole Size: 14 3/4"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Int. Csg: 8 5/8", 24#, K-55
Set: @ 2840' w/ 900sks
Hole Size: 11"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Prod. Csg: 5 1/2", 15.5#, K-55
Set: @ 7153' w/ 500 sks
Hole Size: 7 7/8"
Circ: No **TOC:** 3400
TOC By: Temperature Survey

Formation Name	TD, ft
	Top
T. Salt	1,550
B. Salt	2,639
Yates	2,790
Seven Rivers	3,083
Queen	3,723
Grayburg	4,073
San Andres	4,546
Delaware	4,872
Bone Spring	5,278
Abo	7,140

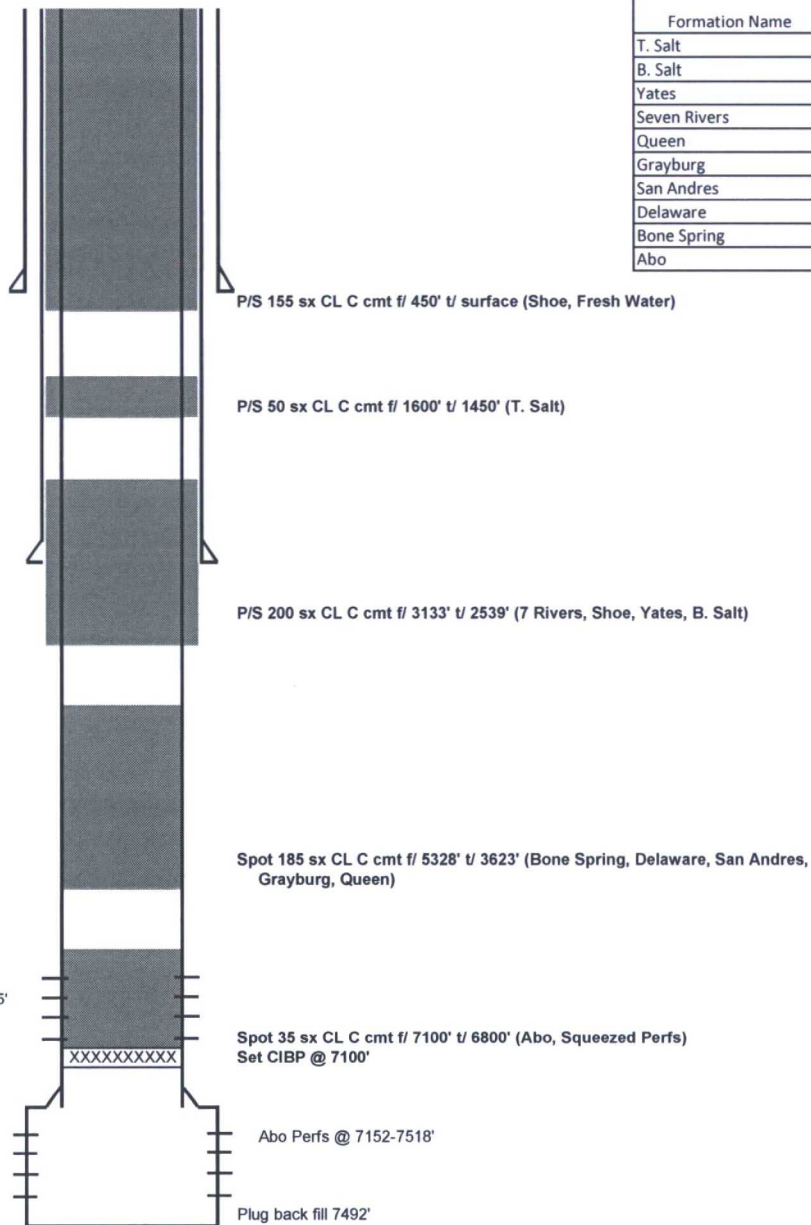

Drinkard Perfs Sqz'ed Off @ 6900'-7005'

XXXXXXXXXX

PBD: 7492'
TD: 7518''