

Submit 1 Copy To Appropriate District Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-31450 ✓
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐ ✓
2. Name of Operator Chevron Midcontinent, LP		6. State Oil & Gas Lease No.
3. Address of Operator 6301 Deauville Blvd., Midland, TX 79706		7. Lease Name or Unit Agreement Name West Lovington Unit ✓
4. Well Location Unit Letter <u>N</u> : <u>140</u> feet from the <u>South</u> line and <u>2625</u> feet from the <u>West</u> line Section <u>X5</u> Township <u>17S</u> Range <u>36E</u> NMPM County <u>Lea</u> ✓		8. Well Number: 85 ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,890' GL, 3,900' KB		9. OGRID Number 241333 ✓
10. Pool name or Wildcat West Lovington Upper San Andres		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUB	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ABANDONING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING ☐	
PULL OR ALTER CASING ☐	MULTIPLE COMPLETIONS ☐	CASING/CEMENT ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 8-5/8" 24# @ 1,500' TOC Surface, 5-1/2" 15.5# @ 5,230' TOC Surface, Perforations 4,716'-5,142'.

Chevron USA INC respectfully request to abandon this well as follows:

1. Call and notify NMOCD 24 hrs before operations begin. Check all casing pressures, discuss with engineer if pressure is noted on the surface casing. Perform bubble test to verify zero pressure.
2. MIRU pulling unit, test tbg, pull rods, N/D WH, N/U BOPE, pull tbg.
3. Set CIBP @ 4,670', spot MLF, pressure test csg t/ 500 psi f/ 10 minutes, spot 85 sx CL "C" cmt f/ 4,670' t/ 3,831', WOC & tag only if csg does not test (Perfs, San Andres, Grayburg, Penrose, Queen).
4. Spot MLF, Spot 75 sx CL "C" cmt f/ 3,407' t/ 2,667' (7 Rivers, Yates, B.Salt).
5. Spot 160 sx CL "C" cmt f/ 1,550' t/ Surface (Shoe, FW, Surf).
6. Cut all casings & anchors & remove 3' below grade. Verify cement to surface & weld on dry hole marker. Clean location.

Note: All cement plugs class "C" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Well Abandonment Engineer, Attorney-in-Fact DATE 6/25/18

Type or print name Howie Lucas E-mail address: howie.lucas@chevron.com PHONE: (832)-588-4044

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 06/26/2018
Conditions of Approval (if any):

C103 INTENT TO P&A EXPIRES
1 YEAR FROM DATE OF APPROVAL

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Wellbore Diagram

Created: 05/22/18 By: MKHS
 Updated: _____ By: _____
 Lease: West Lovington Unit
 Field: Lovington Upper San Andres West
 Surf. Loc.: 140' FSL & 2625' FWL
 Bot. Loc.: _____
 County: Lea St.: NM
 Status: SI Producer

Well #: 85 St. Lse: _____
 API: 30-025-31450
 Unit Ltr.: D Section: 5
 TSHP/Rng: 17S / 36E
 Unit Ltr.: _____ Section: _____
 TSHP/Rng: _____
 Directions: _____
 Chevno: OS6084

Surface Casing

Size: 8-5/8"
 Wt., Grd.: 24#
 Depth: 1500'
 Sxs Cmt: 600sx CI C
 Circulate: Yes - 42sx
 TOC: Surface
 Hole Size: 12-1/4"


KB: 3900'
 DF: _____
 GL: 3890'
 Ini. Spud: 02/27/92
 Ini. Comp.: 03/05/92

Production Casing

Size: 5-1/2"
 Wt., Grd.: 15.5#
 Depth: 5230'
 Sxs Cmt: 1050sx CI C
 Circulate: Yes - 87sx
 TOC: Surface
 Hole Size: 7-7/8"

FORMATION TOPS	
Seven Rivers	3357
Queen	3965
Penrose	4170
Grayburg	4410
San Andres	4676
San Andres OWC	5206
TD	5230

PBTD: 5183'
 TD: 5230'

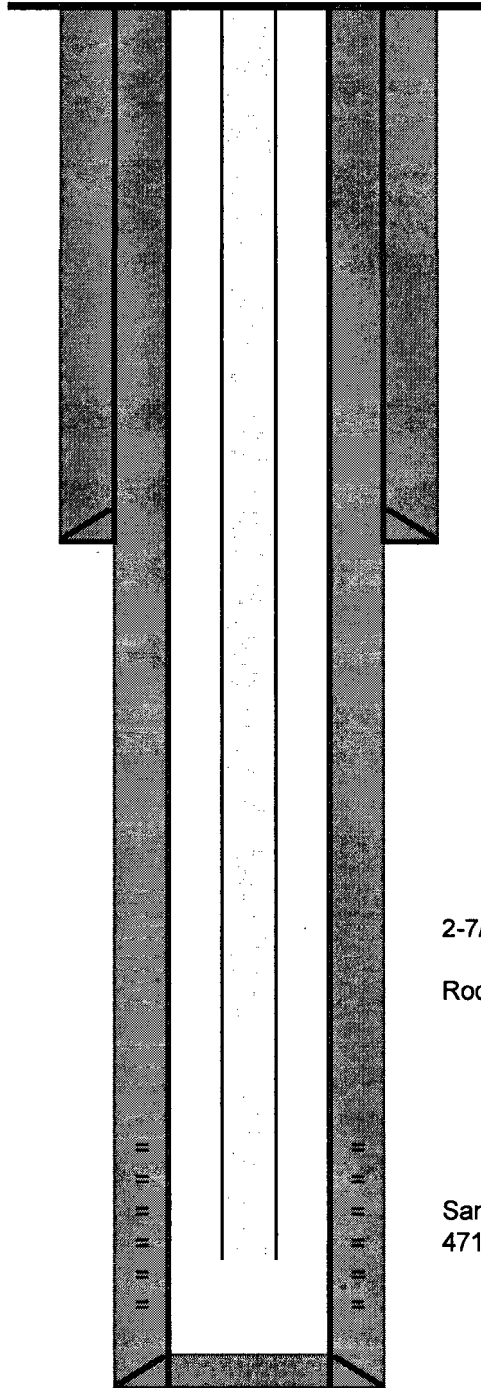

10/25/94: Complete. Stim w/ 10,000 gals 20% acid & 26 tons CO2.

10/25/94: Pmp 220 gals SCW-0358H down csg.

10/14/00: Pulled stuck pmp.

8/5/14: Tubing repair.

11/18/15: Rod repair.

12/29/16: Rod repair.

9/15/17: Down due to rod part.

2-7/8" 6.5# J55 tbg @ 5092'

Rod pmp @ 5024'

San Andres Perfs:
4716-5142'

Notes: Various rod failures, some near surface

Wellbore Diagram

Created: 05/22/18	By: MKHS	Well #: 85	St. Lse: 30-025-31450
Updated: _____	By: _____	API: _____	Unit Ltr.: D
Lease: West Lovington Unit		TSHP/Rng: 17S / 36E	Section: 5
Field: Lovington Upper San Andres West		Unit Ltr.: _____	Section: _____
Surf. Loc.: 140' FSL & 2625' FWL		TSHP/Rng: _____	Directions: _____
Bot. Loc.: _____		Chevno: OS6084	
County: Lea	St.: NM		
Status: SI Producer			

Surface Casing

Size: 8-5/8"
 Wt., Grd.: 24#
 Depth: 1500'
 Sxs Cmt: 600sx CI C
 Circulate: Yes - 42sx
 TOC: Surface
 Hole Size: 12-1/4"


KB: 3900'
 DF: _____
 GL: 3890'
 Ini. Spud: 02/27/92
 Ini. Comp.: 03/05/92

Production Casing

Size: 5-1/2"
 Wt., Grd.: 15.5#
 Depth: 5230'
 Sxs Cmt: 1050sx CI C
 Circulate: Yes - 87sx
 TOC: Surface
 Hole Size: 7-7/8"

FORMATION TOPS	
Seven Rivers	3357
Queen	3965
Penrose	4170
Grayburg	4410
San Andres	4676
San Andres OWC	5206
TD	5230

PBTD: 5183'
 TD: 5230'

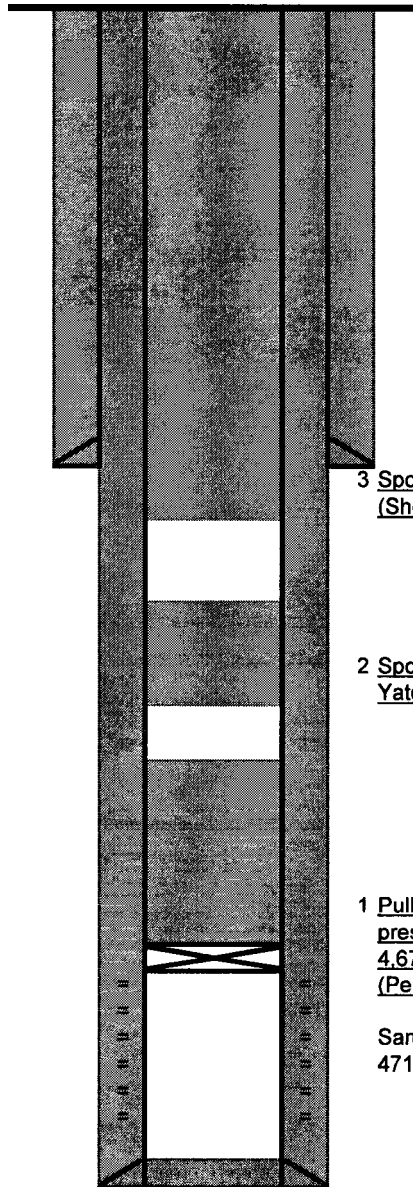

3 Spot 160 sx CL "C" cmt f/ 1,550' t/ Surface (Shoe, FW)

2 Spot 75 sx CL "C" cmt f/ 3,407' t/ 2,667' (7 Rivers Yates, B.Salt)

1 Pull tbq and rods, set CIBP @ 4,670' on tbq, spot MLF, pressure test csq, spot 85 sx CL "C" cmt f/ 4,670' t/ 3,831', WOC & tag only if csq does not test (Perfs, San Andres, Grayburg, Penrose, Queen)

San Andres Perfs:
 4716-5142'

Notes: Various rod failures, some near surface