

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO.	30-015-27192	/
5. Indicate Type of Lease	STATE X FEE	/
6. State Oil & Gas Lease No.		
7. Lease Name or Unit Agreement Name	Artesia Metex Unit	/
8. Well Number	064	/
9. OGRID Number	269864	/
10. Pool name or Wildcat	Artesia QU-GB-SA	/

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other **HOBBS OCD**

2. Name of Operator: State of New Mexico formerly Canyon E&P Company **DEC 05 2018**

3. Address of Operator: 1625 N. French Drive Hobbs, NM 88240 **RECEIVED**

4. Well Location
 Unit Letter H: 1550 feet from the North line and 990 feet from the East line
 Section 25 Township 18S Range 27E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SEE ATTACHED

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE _____ TITLE _____ DATE _____

Type or print name _____ E-mail address: _____ PHONE: _____

For State Use Only

APPROVED BY: Mable P. S. [Signature] TITLE P.E.S. DATE 12/05/2018


Conditions of Approval (if any):

Canyon E&P Company
Artesia Metex Unit #64
30-015-27192
1550 FNL & 990 FEL
UL-H, Sec 25, T18S, R27E


8 5/8" 24 # casing set at 368'. Cemented with 300 sx cement. Cement circulated.
5 1/2" 14# casing set at 2180'. Cemented with 485 sx cement. Cement circulated.
Perforations: 1835'-2028'

1. MIRU and POOH with production equipment.
2. Make gauge ring run and set 5 1/2" CIBP at 1735'. Circulate MLF and test casing to 500#.
3. Spot 50 sx cement on top of CIBP.
4. Spot cement from 418' to surface.
5. Cut off wellhead 3' below ground level.
6. Install upright marker and cut off anchors.

State of New Mexico for Canyon
E&P Company
Artesia Metex Unit #64
API 30-015-27192
WBD Before PA

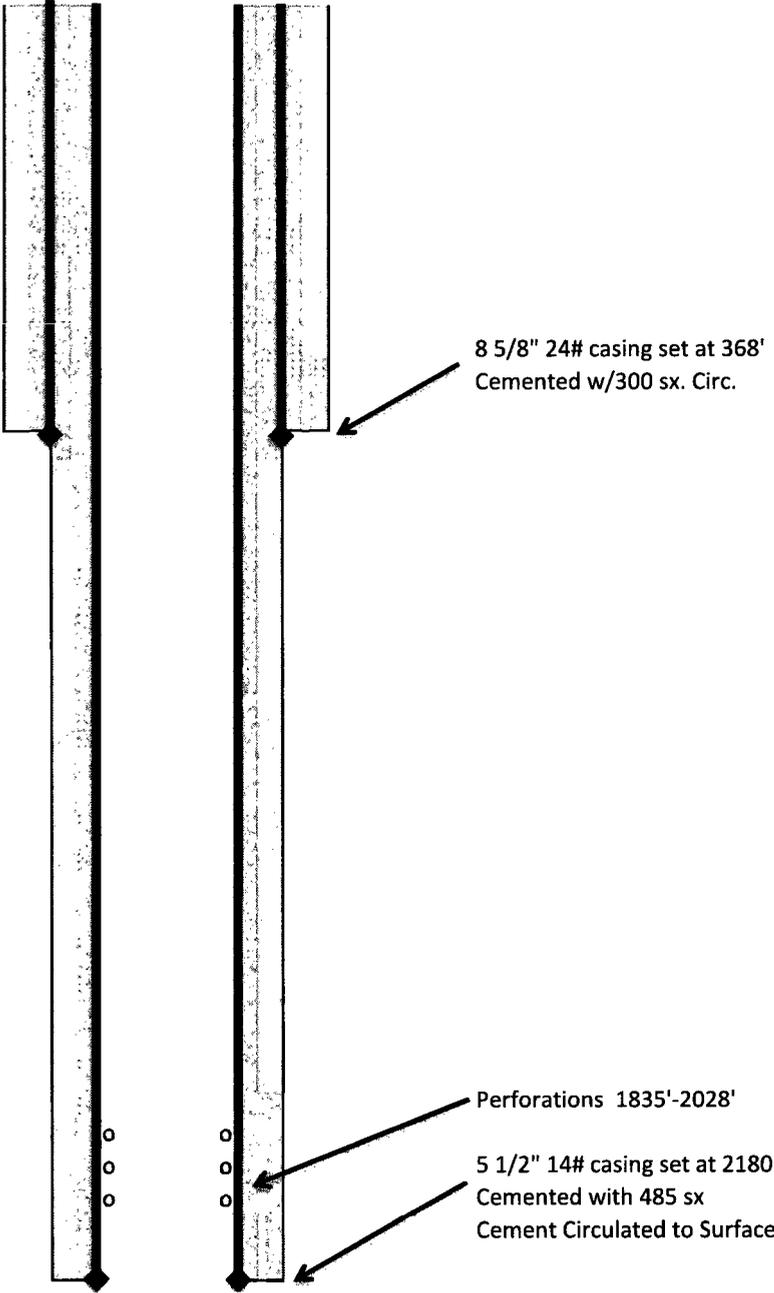

State of New Mexico for Canyon
E&P Company
Artesia Metex Unit #64
API 30-015-27192
WBD After PA

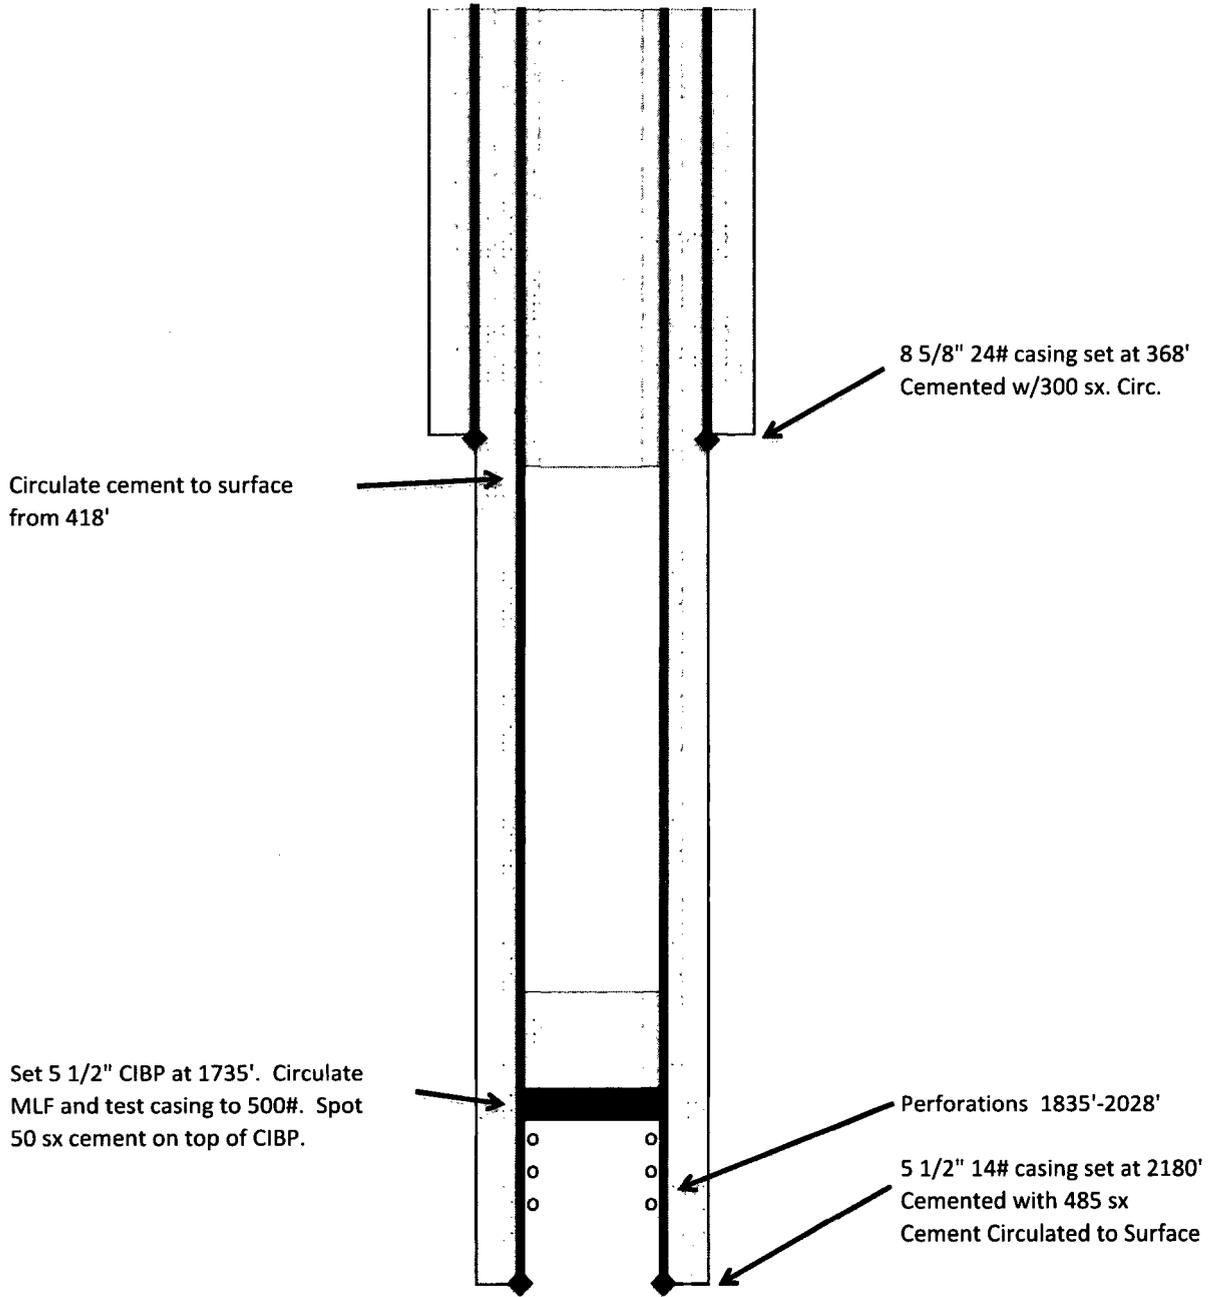

8 5/8" 24# casing set at 368'
Cemented w/300 sx. Circ.

Circulate cement to surface
from 418'

Set 5 1/2" CIBP at 1735'. Circulate
MLF and test casing to 500#. Spot
50 sx cement on top of CIBP.

Perforations 1835'-2028'

5 1/2" 14# casing set at 2180'
Cemented with 485 sx
Cement Circulated to Surface