# Wellbore Diagram : NHSAU 527-30

25-36247

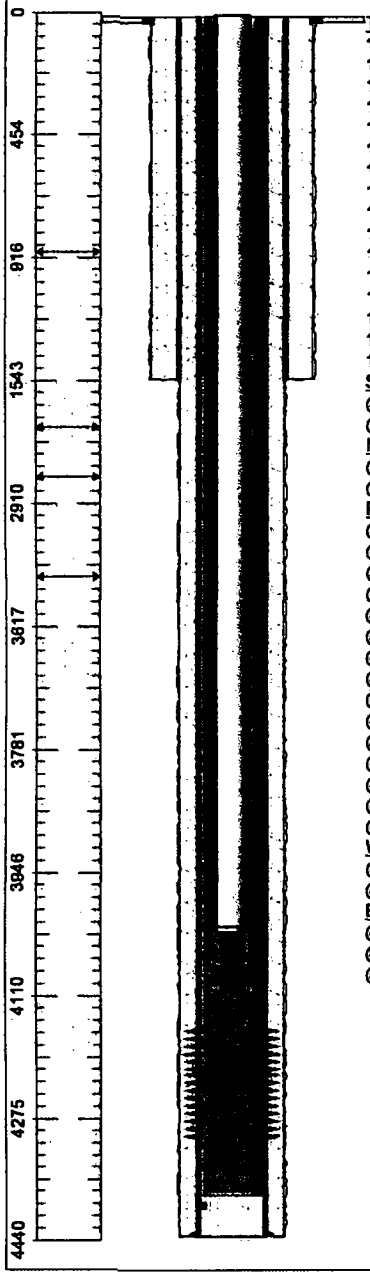


Tubing String Quantity (Top-Bottom Depth) Desc
1 @(6-12) J-55 2.875 OD/ 6.40# T&C External Upset 2.441 ID 2.347 Drift - Bare- - Rerun
1 @(497-1147) ESP Cable (REDA)-LT8517303 SLB CON 4AWGF REDA Galv.- - New
1 @(6-3561) ESP Cable (Centrilift)-103692151A C1030CBLYCUS 4AWG CPLF Galv.- - Used & Inspected
126 @(12-4018) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift - Bare- - Rerun
1 @(4018-4019) Seat Nipple - Standard (2.875") Cup Type- - New
1 @(4019-4025) J-55 2.875 OD/ 6.40# T&C External Upset 2.441 ID 2.347 Drift - Bare- - New
1 @(4025-4025) ESP Bolt on Discharge (Non-Serialized/Centrilift)-10210885 400 B/O 12 MIL (SS)- - New
1 @(3971-4041) ESP-Motor Flat Cable (Centrilift) 14551098 C78450-070 6 AWG KLHT MONEL- - New
1 @(4025-4043) ESP Pump (Non-Serialized/Centrilift)-14689002 C1030YCUS 98 FLEX17.5 400PMSND 12 MIL...
1 @(4043-4066) ESP Pump (Non-Serialized/Centrilift)-14834687 C323962 134 FLEX17.5 400PMSND 12 MIL (...
1 @(4066-4069) ESP Gas Separator (Non-Serialized/Centrilift)-12746158 C1030YCUS GASSEP 400GHSVV 1...
1 @(4069-4074) ESP Seal (Non-Serialized/Centrilift)-14863952 C313012077 FSC3U PFSA CL5 FER HL PFSA...
1 @(4080-4080) ESP Motor Pothead- - New
1 @(4074-4080) ESP Seal (Non-Serialized/Centrilift)-14841061 C313017048 FSB3DB H6 FER SSCV SB/SB 1...
1 @(4080-4095) ESP Motor (Non-Serialized/Centrilift)-14822813 105106829 450SP 110HP 1550V 46A 12 MIL ...
1 @(4095-4096) ESP Downhole Sensor (Non-Serialized/Centrilift)-14103934 C1030YCUS WELLLFT N 150 6K ...

Surface Casing (Top-Bottom Depth) Desc
@(14-40) Cement (behind Casing)- - N/A
@(14-40) Unknown Grade/Thread/Weight 14.000 OD- - N/A

Intermediate Casing (Top-Bottom Depth) Desc
@(14-1536) Cement (behind Casing)- - N/A
@(14-1536) J-55 8.625 OD/ 24.00# Round Short 8.097 ID 7.972 Drift- - N/A

Production Casing (Top-Bottom Depth) Desc
@(14-1423) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(1423-1440) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(1440-3507) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(3507-3509) DV Tool- - N/A
@(3509-3983) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(3983-4003) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(4153-4206) Perforations-Closed-Squeezed - N/A
@(4212-4303) Perforations-Open - N/A
@(4153-4303) Producing Interval-SN ANDR/527-30- - N/A
@(4003-4390) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(4390-4391) Float Collar- - N/A
@(4391-4434) J-55 5.500 OD/ 15.50# Round Short 4.950 ID 4.825 Drift- - N/A
@(4434-4435) Casing Shoe ( 5.500 OD Casing)- - N/A
@(4380-4435) Plug Back (CEMENT )- - N/A
@(14-4435) Cement (behind Casing)- - N/A

Wellbore Notes (Top-Bottom Depth) Desc
@(4435-4435) Total Depth- - N/A
@(4380-4435) Plug Back Total Depth- - N/A

Borehole (Top-Bottom Depth) Desc
@(14-40) Wellbore Hole OD-20.0000- - N/A
@(40-1536) Wellbore Hole OD-12.2500- - N/A
@(1536-4435) Wellbore Hole OD- 7.8750- - N/A