

1625 N. French Drive
Hobbs, NM 88240

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.

NM -15314

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Yates 29 Federal #1

9. API Well No.

30-005-20861

10. Field and Pool, or Exploratory Area

SE Chaves Queen Gas Area Assoc

11. County or Parish, State

Chaves, NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Vintage Drilling LLC

3. Address and Telephone No.

R 310 S. Haldeman Rd, Artesia, NM 88210

4. Location of Well (Footage, Sec., T. R. M. or Survey Description)

990' FSL 1650' FWL
Sec 29, T12S, R31E

12 CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

APPROVED FOR 4 MONTH PERIOD
ENDING 12/14/06

Pull rods and tubing.


Set cast iron bridge plug at 2500'. Cap with 35' cement.

Perforate 4 1/2" casing at 1850' and squeeze, set 100' plug from 1850' - 1750', TAG.

Perforate 4 1/2" casing at 1050' and squeeze, set 100' plug from 1050' - 950', TAG.

Set 60' surface plug across all annuluses.

Set dry hole marker.

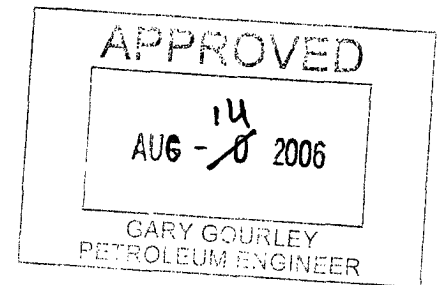

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Secretary

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

Title 18 U.S.C Section 1001. makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representation& as to any matter within its jurisdiction

• See Instruction on Reverse Side

GWW

Notes 29 Federal #1
N-29-12S-21E

12 1/4" hole

8 5/8" 23" @ 1002'
w/ 475 AX
CIRC

Est TDC @ 1838' (calc)

7 7/8" hole

Perfs. Queen
2549-2554'

4 1/2" 9.5" @ 2620'
w/ 275 AX 50/50
POT

TD 2620'
PBD 2599

tops - NA

acc
2/10/86