

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-10068
5. Indicate Type of Lease STATE ☐ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name J.W. Grizzel A
8. Well Number 004
9. OGRID Number 1958
10. Pool name or Wildcat Penrose, Skelly Grayburg

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☒

2. Name of Operator BEC Corp.

3. Address of Operator
P.O. Box 1392, Midland, TX 79702

4. Well Location
Unit Letter M : _____ feet from the 660' S line and 660 feet from the
W line
Section 5 Township 22S Range 37E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☒ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Drl cmt plug @ 600' & test csg, if no test perf 7" csg @ cmt top of 1739' & sqz 100 sx plug, tag, perf & sqz 50sx plug @ 300', tag & set 10 sx plug @ surface, install PA marker



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE [Signature] TITLE Asst. Supervisor DATE 12/01/08

Type or print name Harry W. Wink
For State Use Only

E-mail address: OTM4@hotmail.com
Telephone No. 432-559-2319

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR BEC CORP
 LEASENAME SW GRIZZELL A
 WELL # 4
 SECT 5 TWN 22S RNG 37E
 FROM 660 NSL 660 EWL
 TD: 3780 FORMATION @ TD P.S.G.
 PBTD: 3735 FORMATION @ PBTD

10 3/4"
@ 257'
 TOC SURF
 LIMER TOP 3144
 CIBP @ 3200'
7"
@ 3556'
 TOC 1739 CALC.

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	10 3/4	257'	SURF	CIRC
INTMED 1				
INTMED 2				
PROD	7"	3556	1739	CALL
	SIZE	TOP	BOT	TOC DETERMINED BY
LINER 1				
LINER 2	4 1/2	3144	3735	3144 CIRC
	CUT & PULL @		TOP - BOTTOM	
INTMED 1			PERFS	-
INTMED 2			OPENHOLE	-
PROD				


* REQUIRED PLUGS DISTRICT I

RUSTLER (ANYTD)	
YATES	
QUEEN	
GRAYBURG	
SAN ANDRES	
CAPTAN REEF	
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BRUSHY CANYON	
BONE SPRING	
OLONETA	
BLINERY	
TUBB	
ORINKARD	
ALBO	
WC	
PENK	
STRAWN	
ATOKA	
MORROW	
SESS	
DEVONIAN	


PLUG	TYPE	SACKS	DEPTH
PLUG	PLUG	CMNT	
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIBP/35'		5300'
PLUG #3	CIBP	25 SXS	5300'
PLUG #4	STUB	50 SXS	4600'-4700'
PLUG #6	REINR SOZ	200 SXS	400'
PLUG #7	SURF	10 SXS	0-10'
PLUG #1	CIBP	35'	3200'
PLUG #2	REINR SOZ	100 SXS	1739'
PLUG #3	REINR SOZ	50 SXS	300'
PLUG #4			
PLUG #5			
PLUG #6			
PLUG #7			
PLUG #8			
PLUG #9			
PLUG #10			
PLUG #			
PLUG #			

4 1/2" LINER
@ 3666'
 TOC 3144'

TD 3780



J. W. GRIZZELL A #4 Plugging

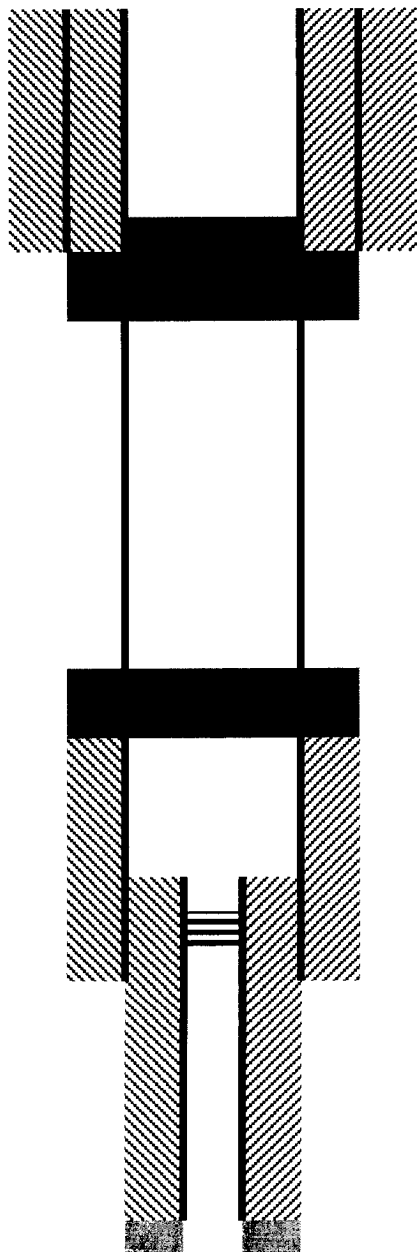

10-3/4" @ 257' TOC Surface

RETR SQZ @ 300' 50 sx

RTNRSQZ 100 sx @ 1739'

Liner top 3144'

CIBP @ 3200'

7" @ 3556' TOC 1739 calculated

4-1/2 Liner Set @ 3666'

TD 3780'

