

Submit 3 Copies To Appropriate District

Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO. 30-025-09505	
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name: Eugene Coates	
8. Well No. 1	
9. Pool name or Wildcat Jalmat, Tansill, Y.7 Rvrs	
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator Chevron USA Inc	
3. Address of Operator 15 Smith Rd, Midland, TX 79705	
4. Well Location Unit Letter <u>O</u> : <u>660</u> feet from the <u>South</u> line and <u>1980</u> feet from the <u>East</u> line Section <u>3</u> Township <u>24-S</u> Range <u>36-E</u> NMPM <u>Lea</u> County	
10. Elevation (Show whether DR, RKB, RT, GR, etc.)	

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24 hrs prior to MI & RU.
2. Set 7" CIBP @ 2925', spot 40sx plug 2925-2725 (Tansill-Yates) WOC Tag.
3. Displace hole w/MLF, 9.5# brine w/25# gel P/BBL.
4. Spot 35sx plug 1400-1200 (T-Salt) WOC Tag.
5. Spot 75sx plug 400-Surf (13 3/8 shoe, 12 1/2 shoe, Surf) WOC Tag.
6. Install dry hole marker.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G.R. Bledsoe TITLE HES Specialist DATE

Type or print name G.R. Bledsoe

Telephone No. (432) 687-7153

(This space for State use)

APPROVED BY Gary W. Wink FIELD REPRESENTATIVE II/STAFF MANAGER TITLE DATE SEP 03 2003
Conditions of approval, if any:


THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

PLUGGING & ABANDONMENT WORKSHEET

(4 STRING CSNG)

OPERATOR CHEVRON USA INC
LEASE NAME EUGENE COATES
WELL # 1

SECT 3 TWN 24-S RNG 36-E
FROM 660 N/S L 1980 E/W L
TD 3615 FORMATION @ TD YATES - 7 RUES
PBDT 3205 FORMATION @ PBDT TANSILL YATES

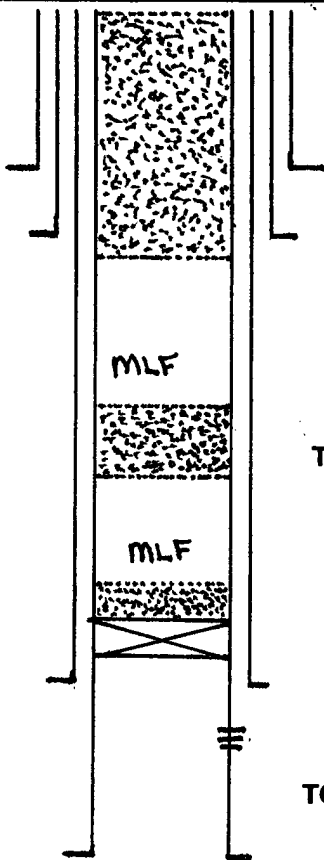

13 3/8
@ 335
TOC SURF

12 1/2
@ 350
TOC SURF

9 5/8
@ 2964
TOC SURF

7
@ 3615
TOC SURF

TD 3615

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	13 3/8	335	SURF	Circ
INTMED 1	12 1/2	350	SURF	Circ.
INTMED 2	9 5/8	2964	SURF	Circ.
PROD	7	3615	SURF	Circ.

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL		TOP - BOTTOM
INTMED 1		PERFS	2975 - 3145
INTMED 2		OPENHOLE	
PROD			

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	CIBP	40	2925
YATES	2	T-SALT	35	1400
QUEEN	3	13 3/8 - 12 1/2	75	400
GRAYBURG				
SAN ANDRES				
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				