

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
March 4, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-31082
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-7896
7. Lease Name or Unit Agreement Name Lovington Paddick Unit
8. Well Number 92
9. OGRID Number
10. Pool name or Wildcat Lovington Paddock

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Chevron Midcontinent, L.P.

3. Address of Operator
#15 Smith Road, Midland, TX 79705

4. Well Location
Unit Letter L : 17 feet from the West line and 2352 feet from the South line
Section 31 Township 16-S Range 37-E NMPM Lea County


11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL L Sect 31 Twp 16S Rng 37E Pit type Steel Depth to Groundwater 53' Distance from nearest fresh water well Over 1000'
Distance from nearest surface water 17 feet from the West line and 2352 feet from the South line (Steel Tank)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT REQUIRED	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	PLUG AND ABANDONMENT ☒
PULL OR ALTER CASING ☐	MULTIPLE COMPLETION ☐	CASING TEST AND CEMENT JOB ☐	OTHER: ☐



13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify OCD 24 hrs prior to MI and RU.
2. RIH tag CIBP at 5950' and spot 25sx cement plug from 5950'-5750'. (5 1/2 shoe, Paddock)
3. Displace hole w/MLF, 9 5# Brine w/12 5# gel P/BBL.
4. Spot 25sx cement plug from 3125'-2925' (B-Salt).
5. Spot 35sx cement plug from 2200'-1910' (T-Salt, 8 5/8 shoe)
6. Spot 25sx cement plug from 150'-surface (Fr. Wtr, surface). WOC TAG.
7. Install dry hole marker.

**THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS**

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent DATE 7-05-2007

Type or print name M. Lee Roark E-mail address: Telephone No. 432-561-8600

(This space for State use)

APPROVED BY Hayes W. Wink TITLE DATE

Conditions of approval, if any

Well: Lovington Paddock Unit #92

Field: Lovington

Reservoir: Paddock

Location:

2352' FSL & 17' FWL
Section: 31 (NE/4 NE/4)
Township 16S
Range 37E Unit: L
County Lea State NM

Elevations:

GL: 3829
KB:
DF:

Log Formation Tops


Salt	2134
B/Salt	3032
Yates	3080
Seven Rivers	3312
Queen	3730
Grayburg	4412
San Andres	4618
Glorieta	5958
Paddock	6067

TUBING DETAIL -

This wellbore diagram is based on the most recent information regarding wellbore configuration and equipment that could be found in the Midland Office wellfiles and computer databases as of the update below. Verify what is in the hole with the wellfile in the Lovington Field Office. Discuss w/WEO Engineer, WO Rep, OS, ALS, & F S prior to rigging up on well regarding any hazards or unknown issues pertaining to the well

CIBP @ 5950

Prod. Csg: 5 1/2" 15.5# K-55 LT&C
Set: 6335 w/1475 sx cmt
Hole Size: 7 7/8" to 5230
Circ. Yes TOC: surface
TOC By: circulation

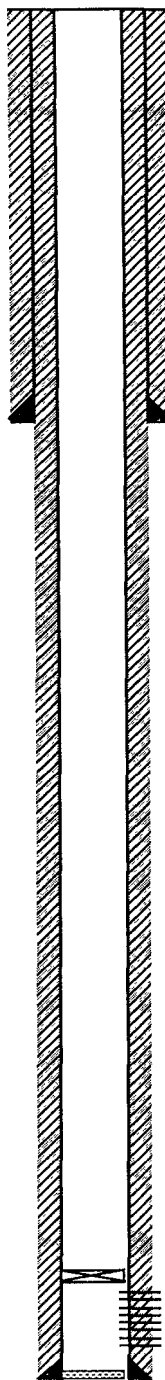**Current
Wellbore Diagram****Well ID Info:**

Chevno: OM2013
API No: 30-025-31082
L5/L6.
Spud Date: 1/27/91
TD Reached: 2/12/91
Compl. Date: 4/16/91

Surface Csg: 8 5/8" 24# K-55 ST&C

Set: @ 2010 w/1200 sx cmt
Hole Size: 12 1/4" TO 2010
Circ: Yes **TOC:** surface
TOC By: circulation

Initial Completion:

4/16/91 (Paddock) 5997, 6032, 6055, 6058, 6097, 6101, 6109, 6115, 6118, 6120, 6123, 6127, 6130, 6133, 6140, 6147, 6149, 6156, 6162, 6165, 6178, 6181, 6185, 6190, 6197, 6200, 6203, 6209, 6212, 6219, 6223, 6226, 6251, 6271, 6279. A/4600 gal

Subsequent Work

5/30/2000 TA, set CIBP @ 5950

Perfs

Status

5997, 6032, 6055, 6058, 6097, 6101, 6109, 6115, 6118, (Paddock - CIBP
6123, 6127, 6130, 6133, 6140, 6147, 6149, 6156, 6162, (Paddock - CIBP
6178, 6181, 6185, 6190, 6197, 6200, 6203, 6209, 6212, Paddock - CIBP
6223, 6226, 6251, 6271, 6279 Paddock - CIBP

TD: 6335 COTD: PBTD: 5950

By W P Johnson

Updated: 3-12-07 by WAYN

New Mexico Office of the State Engineer
POD Reports and Downloads

Township: 16S Range: 37E Sections: 31

NAD27 X: Y: Zone:  Search Radius:

County: LE  Basin:  Number: Suffix:

Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

POD / Surface Data Report

Avg Depth to Water Report

Water Column Report

Clear Form

iWATERS Menu

Help

AVERAGE DEPTH OF WATER REPORT 07/05/2007

Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	(Depth Water in Feet)		
								Min	Max	Avg
L	16S	37E	31				8	50	72	53

Record Count: 8