

Results of Directional Survey

39009

API number:	30-025-390009		
OGRID:		Operator:	MARBOB ENERGY CORP
		Property:	FALCON FEDERAL # 2

surface

ULSTR:	C	09	T 19S	R 32E
		430 FNL	2310 FWL	

BH Loc

ULSTR:	D	09	T 19S	R 32E
		536 FNL	344 FWL	

	MD	N/S	E/W	VD
	9521	6.17	-375.17	9312.33
TOP PERFS/OH	9550	6.45	-403.89	9316.21
	9562	6.57	-415.78	9317.82
	11025	-101.17	-1870.97	9311.26
BOT PERFS/OH	11050	-102.44	-1895.94	9311.70
	11047	-102.29	-1892.94	9311.65

NEXT TO LAST	11025	-101.17	-1870.97	9311.26
LAST READING	11047	-102.29	-1892.94	9311.65
TD	11120	-106.01	-1965.84	9312.94

Surface Location	430 FN	2310 FW
Projected BHL	536 FN	344 FW
Location of		
Top Perfs/OH	424 FN	1906 FW
Bottom Perfs/OH	532 FN	414 FW

SUMMARY of Subsurface Locations

Surface Location	C-09-19S-32E	430 FN	2310 FW	Vert. Depth
Top Perfs/OH	C-09-19S-32E	424 FN	1906 FW	9316.21
Bottom Perfs/OH	D-09-19S-32E	532 FN	414 FW	9311.70
Projected TD	D-09-19S-32E	536 FN	344 FW	9312.94

OPERATOR: Marbob
WELL/LEASE: Falcon Federal # 2 -H Sec.9, T19S, R32E
COUNTY: Lea Co., New Mexico

SUR: C-9-19s-32e, 430/N & 2310/W
BHL: D-9-19s-32e, 536/N & 344/W
API # 30-025-39009

**STATE OF NEW MEXICO
DEVIATION REPORT**

<u>Depth</u>	<u>Deviation</u>	<u>Depth</u>	<u>Deviation</u>
302	1/2	4,908	1
600	1/2	5,384	1 1/4
906	1 1/4	5,863	1/2
1,066	1	6,342	3/4
1,366	1	6,824	3/4
1,716	1 1/2	7,324	1/4
2,002	1	7,807	1
2,285	1 3/4	8,284	1/4
2,484	1	8,771	0 1
2,763	1 1/4		
3,017	1		
3,511	1 1/4		
3,988	1 1/2		
4,432	1 1/4		

Patriot Drilling, LLC




M. Leroy Peterson, Executive Vice-
President


The foregoing instrument was acknowledged before me on this 14th day of October, 2008 by M. Leroy Peterson, Executive Vice-President of Patriot Drilling, LLC.

My Commission Expires: 5/29/2009



Dora H. Duarte
Notary Public for Midland Co., Texas

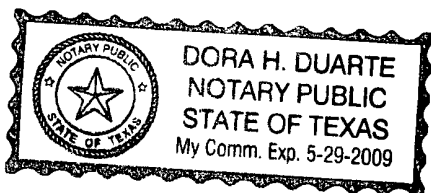

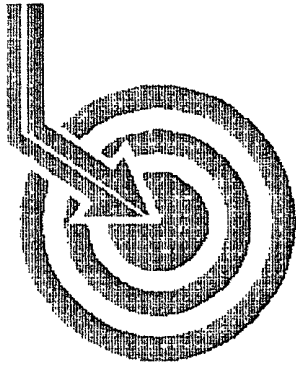

Scientific Drilling

SUR: C-9-19s-32e, 430/N & 2310/W
BHL: D-9-19s-32e, 536/N & 344/W
API # 30-025-39009

MARBOB ENERGY


Field: Falcon
Site: Eddy County, NM
Well: Falcon Federal #2
Wellpath: VH - Job #32K0908695
Survey: 09/09/08

This survey is correct to the best of my knowledge
and is supported by actual field data.

.....Chapman..... Company Representative

Notorized this date 14th of October, 2008.

Carrie Reed
Notary Signature
County of Midland
State of Texas

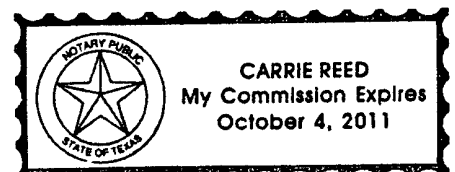



Scientific Drilling International Survey Report

Company: MARBOB ENERGY	Date: 10/06/2008	Time: 16:22:14	Page: 1
Field: Falcon	Co-ordinate(NE) Reference:	Site: Eddy County, NM, Grid North	
Site: Eddy County, NM	Vertical (TVD) Reference:	SITE 0.0	
Well: Falcon Federal #2	Section (VS) Reference:	Well (0.00N,0.00E,270.00Azi)	
Wellpath: VH - Job #32K0908695	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: 09/09/08	Start Date: 09/09/2008
KSRG 0'-8778'	
Company: Scientific Drilling Internatio	Engineer: Madrid w/GeoGyro
Tool: Keeper;Keeper Gyro	Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.00	0.00	359.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.24	92.81	100.00	-0.21	-0.01	0.21	0.24	0.21	92.81
200.00	0.58	130.94	200.00	-0.80	-0.35	0.80	0.42	0.87	113.74
300.00	0.42	128.22	299.99	-1.47	-0.91	1.47	0.16	1.73	121.76
400.00	0.21	122.32	399.99	-1.91	-1.24	1.91	0.21	2.28	122.84
500.00	0.47	128.10	499.99	-2.39	-1.59	2.39	0.26	2.87	123.56
600.00	0.66	131.89	599.98	-3.14	-2.22	3.14	0.19	3.85	125.28
700.00	0.55	125.33	699.98	-3.96	-2.89	3.96	0.13	4.90	126.06
800.00	0.60	132.34	799.97	-4.74	-3.52	4.74	0.09	5.90	126.56
900.00	0.62	144.13	899.97	-5.45	-4.31	5.45	0.13	6.94	128.34
1000.00	0.74	165.31	999.96	-5.93	-5.37	5.93	0.28	8.00	132.18
1100.00	0.65	168.41	1099.95	-6.20	-6.55	6.20	0.10	9.02	136.56
1200.00	0.80	167.51	1199.95	-6.47	-7.79	6.47	0.15	10.12	140.28
1300.00	0.72	158.42	1299.94	-6.85	-9.05	6.85	0.14	11.35	142.88
1400.00	0.64	130.58	1399.93	-7.51	-10.00	7.51	0.34	12.51	143.11
1500.00	0.54	121.62	1499.93	-8.33	-10.61	8.33	0.14	13.49	141.86
1600.00	0.43	104.83	1599.92	-9.10	-10.95	9.10	0.18	14.24	140.30
1700.00	0.95	71.83	1699.91	-10.25	-10.79	10.25	0.63	14.88	136.49
1800.00	0.92	63.36	1799.90	-11.75	-10.17	11.75	0.14	15.54	130.88
1900.00	0.99	67.48	1899.89	-13.27	-9.48	13.27	0.10	16.31	125.56
2000.00	1.00	59.80	1999.87	-14.82	-8.71	14.82	0.13	17.19	120.45
2100.00	0.97	53.00	2099.86	-16.25	-7.76	16.25	0.12	18.01	115.54
2200.00	1.02	45.49	2199.84	-17.56	-6.63	17.56	0.14	18.77	110.69
2300.00	0.97	53.83	2299.83	-18.88	-5.51	18.88	0.15	19.67	106.27
2400.00	1.18	51.31	2399.81	-20.37	-4.36	20.37	0.22	20.83	102.10
2500.00	1.20	51.42	2499.79	-21.99	-3.07	21.99	0.02	22.20	97.94
2600.00	1.35	54.97	2599.76	-23.77	-1.74	23.77	0.17	23.83	94.18
2700.00	1.46	57.93	2699.73	-25.82	-0.39	25.82	0.13	25.82	90.86
2800.00	1.19	60.77	2799.71	-27.80	0.80	27.80	0.28	27.81	88.36
2900.00	1.07	56.66	2899.69	-29.49	1.82	29.49	0.14	29.54	86.47
3000.00	1.07	60.07	2999.67	-31.08	2.80	31.08	0.06	31.20	84.86
3100.00	1.13	74.71	3099.65	-32.84	3.52	32.84	0.29	33.02	83.88
3200.00	1.11	85.69	3199.63	-34.75	3.85	34.75	0.22	34.97	83.67
3300.00	1.08	83.29	3299.61	-36.66	4.04	36.66	0.05	36.88	83.71
3400.00	1.14	90.38	3399.60	-38.59	4.14	38.59	0.15	38.81	83.87
3500.00	1.01	80.19	3499.58	-40.45	4.28	40.45	0.23	40.68	83.95
3600.00	1.07	89.18	3599.56	-42.25	4.45	42.25	0.17	42.48	83.99
3700.00	0.92	78.44	3699.55	-43.97	4.62	43.97	0.24	44.21	84.00
3800.00	0.99	80.83	3799.53	-45.61	4.92	45.61	0.08	45.88	83.84
3900.00	0.84	81.94	3899.52	-47.19	5.16	47.19	0.15	47.47	83.76
4000.00	0.68	74.90	3999.51	-48.49	5.42	48.49	0.18	48.79	83.62
4100.00	0.78	70.65	4099.50	-49.70	5.80	49.70	0.11	50.04	83.35
4200.00	0.73	76.08	4199.49	-50.96	6.18	50.96	0.09	51.34	83.09
4300.00	0.56	64.62	4299.49	-52.02	6.54	52.02	0.21	52.43	82.83
4400.00	0.70	65.57	4399.48	-53.02	7.00	53.02	0.14	53.48	82.48
4500.00	0.60	72.75	4499.48	-54.08	7.41	54.08	0.13	54.58	82.20
4600.00	0.58	65.70	4599.47	-55.04	7.77	55.04	0.08	55.59	81.96
4700.00	0.60	69.17	4699.47	-55.99	8.17	55.99	0.04	56.58	81.70
4800.00	0.62	55.52	4799.46	-56.93	8.66	56.93	0.15	57.58	81.35



Scientific Drilling International Survey Report

Company: MARBOB ENERGY
Field: Falcon
Site: Eddy County, NM
Well: Falcon Federal #2
Wellpath: VH- Job #32K0908695

Date: 10/06/2008 Time: 16:22:14 Page: 2
Co-ordinate(NE) Reference: Site: Eddy County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,270.00Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClbD ft	ClbA deg
4900.00	0.58	56.30	4899.45	-57.79	9.25	57.79	0.04	58.53	80.91
5000.00	0.77	41.70	4999.45	-58.66	10.03	58.66	0.25	59.51	80.30
5100.00	0.83	44.09	5099.44	-59.61	11.05	59.61	0.07	60.63	79.50
5200.00	0.87	40.21	5199.43	-60.61	12.15	60.61	0.07	61.81	78.66
5300.00	0.94	34.64	5299.41	-61.56	13.41	61.56	0.11	63.00	77.71
5400.00	0.86	38.32	5399.40	-62.49	14.67	62.49	0.10	64.19	76.79
5500.00	0.66	29.23	5499.39	-63.24	15.76	63.24	0.23	65.17	76.00
5600.00	0.78	13.61	5599.39	-63.68	16.93	63.68	0.23	65.89	75.11
5700.00	0.61	10.85	5699.38	-63.94	18.11	63.94	0.17	66.46	74.19
5800.00	0.56	11.10	5799.37	-64.14	19.11	64.14	0.05	66.92	73.41
5900.00	0.45	22.35	5899.37	-64.38	19.96	64.38	0.15	67.40	72.78
6000.00	0.42	8.74	5999.37	-64.58	20.68	64.58	0.11	67.81	72.24
6100.00	0.35	8.75	6099.36	-64.69	21.35	64.69	0.07	68.12	71.74
6200.00	0.33	32.35	6199.36	-64.89	21.89	64.89	0.14	68.48	71.36
6300.00	0.31	29.97	6299.36	-65.18	22.37	65.18	0.02	68.91	71.06
6400.00	0.20	24.51	6399.36	-65.38	22.76	65.38	0.11	69.23	70.81
6500.00	0.22	29.67	6499.36	-65.55	23.09	65.55	0.03	69.50	70.60
6600.00	0.15	47.55	6599.36	-65.74	23.34	65.74	0.09	69.76	70.45
6700.00	0.13	16.98	6699.36	-65.87	23.54	65.87	0.08	69.95	70.34
6800.00	0.11	17.65	6799.36	-65.93	23.74	65.93	0.02	70.08	70.20
6900.00	0.19	25.81	6899.36	-66.04	23.98	66.04	0.08	70.26	70.04
7000.00	0.05	33.96	6999.36	-66.13	24.17	66.13	0.14	70.41	69.93
7100.00	0.12	344.32	7099.36	-66.13	24.30	66.13	0.10	70.45	69.82
7200.00	0.24	330.78	7199.36	-66.00	24.59	66.00	0.13	70.43	69.57
7300.00	0.18	311.13	7299.36	-65.78	24.87	65.78	0.09	70.32	69.29
7400.00	0.14	298.99	7399.36	-65.55	25.03	65.55	0.05	70.17	69.10
7500.00	0.18	317.97	7499.35	-65.34	25.21	65.34	0.07	70.04	68.90
7600.00	0.13	320.63	7599.35	-65.16	25.41	65.16	0.05	69.94	68.69
7700.00	0.17	336.87	7699.35	-65.03	25.64	65.03	0.06	69.90	68.48
7800.00	0.27	294.20	7799.35	-64.76	25.87	64.76	0.19	69.74	68.22
7900.00	0.22	330.34	7899.35	-64.45	26.14	64.45	0.16	69.55	67.93
8000.00	1.59	331.92	7999.34	-63.70	27.53	63.70	1.37	69.39	66.63
8100.00	0.19	304.99	8099.32	-62.91	28.85	62.91	1.42	69.21	65.37
8200.00	0.21	261.01	8199.32	-62.60	28.91	62.60	0.15	68.95	65.21
8300.00	0.35	219.89	8299.32	-62.22	28.65	62.22	0.24	68.50	65.28
8400.00	0.69	214.56	8399.32	-61.68	27.92	61.68	0.34	67.71	65.65
8500.00	1.00	219.64	8499.31	-60.78	26.75	60.78	0.32	66.41	66.25
8600.00	1.07	223.30	8599.29	-59.59	25.40	59.59	0.10	64.77	66.91
8700.00	1.21	218.49	8699.27	-58.29	23.89	58.29	0.17	63.00	67.71
8778.00	1.20	239.78	8777.25	-57.07	22.84	57.07	0.57	61.47	68.19




Scientific
Drilling

Field: Falcon
Site: Eddy County, NM
Well: Falcon Federal #2
Wellpath: VH - Job #32K0908695
Survey: 09/09/08



Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 10/06/2008
Model: igr2000

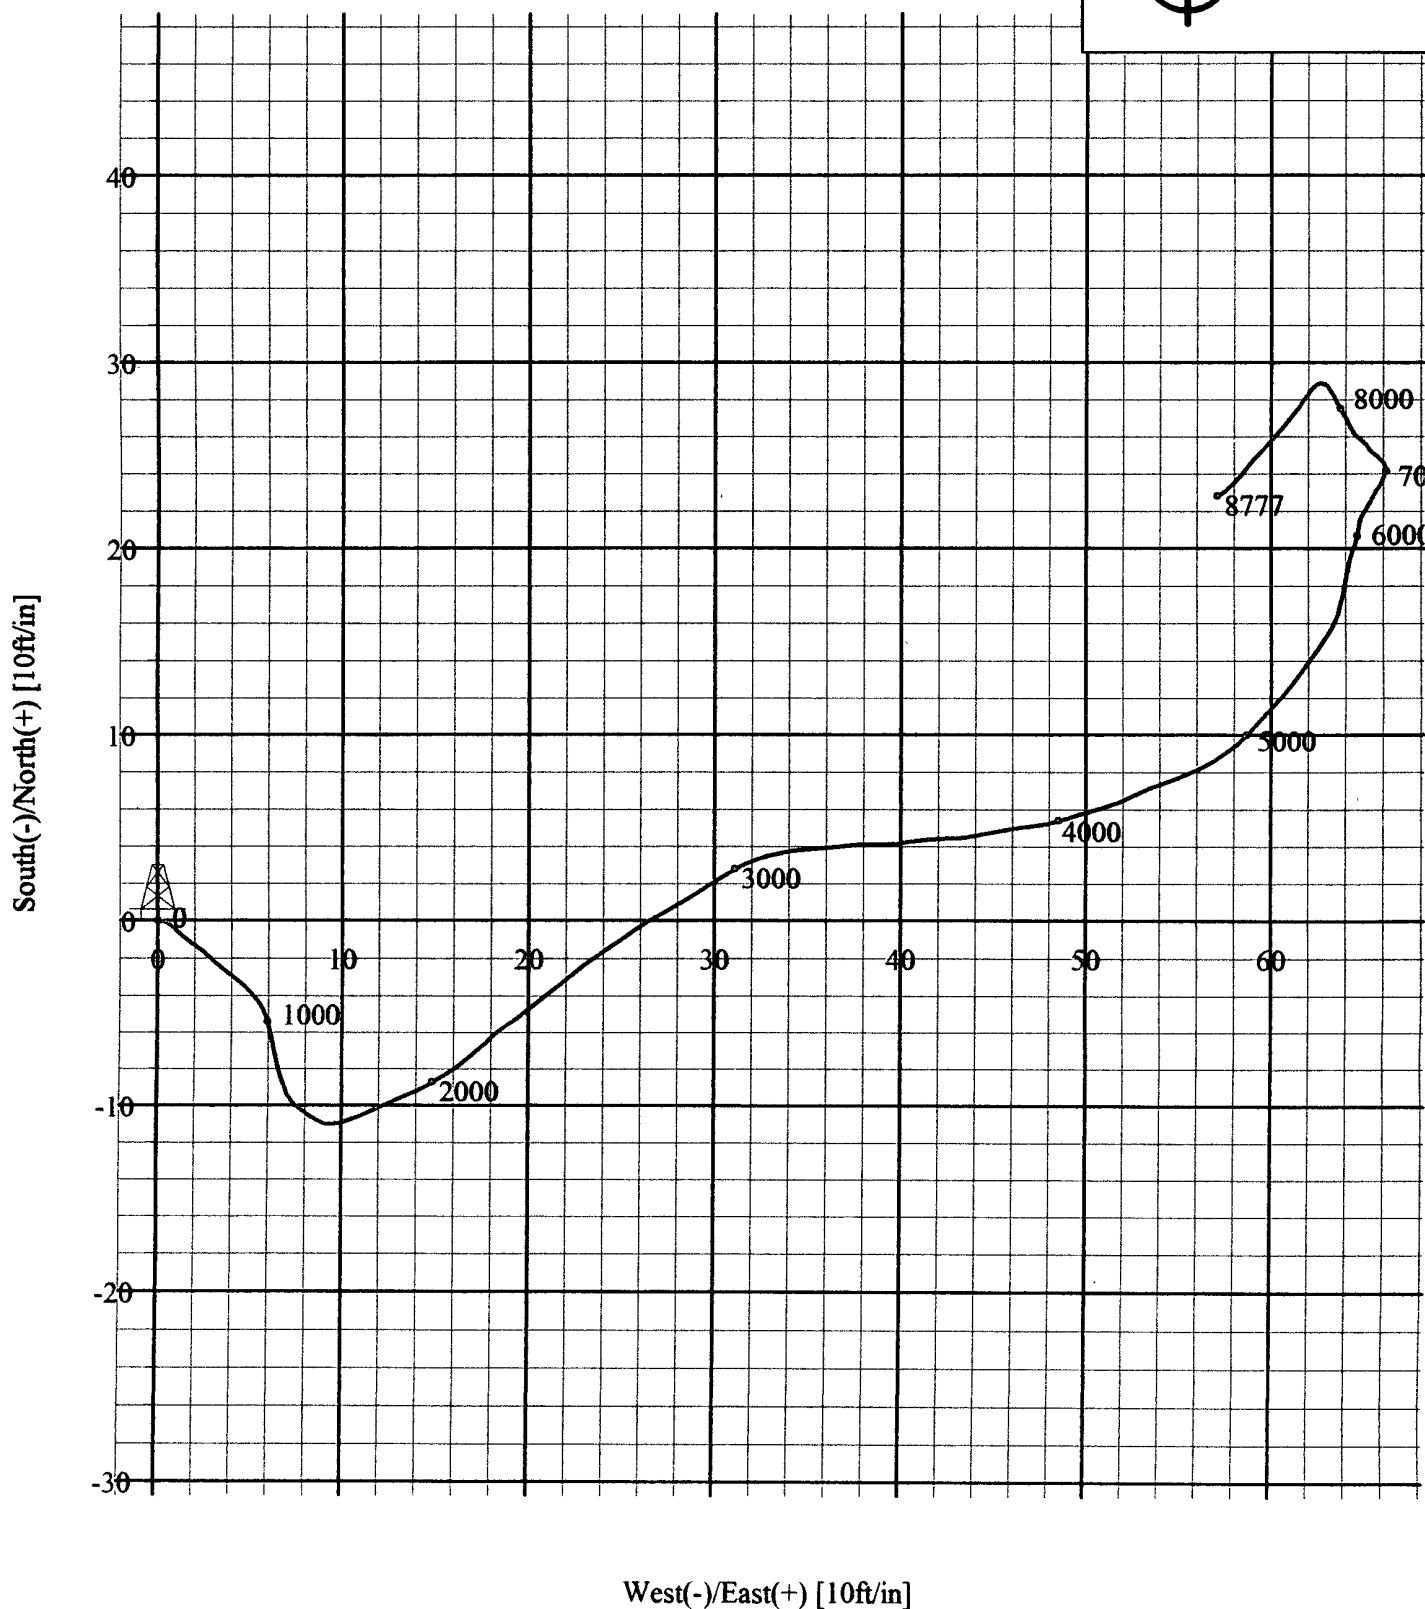

MARBOB ENERGY CORPORATION
FALCON FEDERAL #2
 Lea County COUNTY, New Mexico
 Rig: Patriot 2
 PathFinder Office Supervisor: Cody Mebane
 PathFinder Field Engineers: Matt Shipp
 Kris Hatley
 David Baker

Survey Calculations by RX4 using Minimum Curvature

PathFinder Energy Services, Inc.

Survey Report

Page 01/03
 Tie-in Date: 09/09/2008
 Date Completed: 09/18/2008

Survey Horiz. Reference: WELLHEAD
 Ref Coordinates: LAT: 32.40.51.2760 N LON: 103.46.18.7680 W
 Reference: NAD27 new mexico east Transverse Mercator
 Ref GRID Coord: X: 672750.2587 Y: 611883.1687
 North Aligned To: GRID NORTH
 Total Magnetic Correction: 7.73° EAST TO GRID
 Vertical Section Plane: 270.00
 Survey Vert. Reference: 17.00' Rotary Table To Ground
 Altitude: 3650.00' Ground To MSL

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Course Length (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft) (ft)		Closure Dist Dir (ft) (deg)		DLS (dg/100ft)
TIE-IN PROVIDED BY SCIENTIFIC DRILLING CONTROLS.										
8778.00	1.20	239.78	8777.25	0.00	-57.07	22.84 N	57.07 E	61.47@	68.19	0.00
THE FOLLOWING ARE PATHFINDER MWD SURVEYS.										
8803.00	1.85	243.32	8802.24	25.00	-56.48	22.53 N	56.48 E	60.81@	68.26	2.63
8835.00	5.01	256.79	8834.18	32.00	-54.66	21.98 N	54.66 E	58.91@	68.10	10.12
8867.00	8.62	256.33	8865.95	32.00	-50.97	21.09 N	50.97 E	55.16@	67.52	11.28
8898.00	13.10	257.94	8896.39	31.00	-45.27	19.81 N	45.27 E	49.42@	66.37	14.48
8929.00	17.76	258.98	8926.26	31.00	-37.19	18.17 N	37.19 E	41.39@	63.97	15.06
8961.00	21.28	260.96	8956.42	32.00	-26.66	16.32 N	26.66 E	31.26@	58.53	11.19
8993.00	24.27	261.61	8985.92	32.00	-14.42	14.45 N	14.42 E	20.41@	44.94	9.38
9025.00	27.17	262.30	9014.74	32.00	-0.67	12.51 N	0.67 E	12.53@	3.07	9.11
9056.00	30.16	264.06	9041.94	31.00	14.09	10.76 N	14.09 W	17.73@	307.35	10.02
9088.00	33.24	265.75	9069.17	32.00	30.84	9.27 N	30.84 W	32.20@	286.74	10.02
9120.00	35.79	267.67	9095.53	32.00	48.94	8.24 N	48.94 W	49.63@	279.56	8.66
9152.00	38.95	268.38	9120.96	32.00	68.35	7.58 N	68.35 W	68.76@	276.33	9.97
9183.00	41.24	268.41	9144.67	31.00	88.30	7.02 N	88.30 W	88.58@	274.54	7.39
9215.00	43.97	269.07	9168.22	32.00	109.96	6.55 N	109.96 W	110.15@	273.41	8.64
9247.00	47.57	269.42	9190.54	32.00	132.88	6.25 N	132.88 W	133.03@	272.69	11.28
9279.00	51.97	270.51	9211.20	32.00	157.31	6.24 N	157.31 W	157.43@	272.27	13.99
9311.00	56.37	270.73	9229.93	32.00	183.24	6.52 N	183.24 W	183.36@	272.04	13.76
9342.00	60.41	270.71	9246.18	31.00	209.63	6.85 N	209.63 W	209.75@	271.87	13.03
9374.00	63.14	270.36	9261.31	32.00	237.83	7.11 N	237.83 W	237.93@	271.71	8.59
9406.00	65.25	269.12	9275.24	32.00	266.63	6.98 N	266.63 W	266.72@	271.50	7.46
9438.00	67.53	269.46	9288.05	32.00	295.95	6.62 N	295.95 W	296.02@	271.28	7.19
9469.00	71.23	269.53	9298.97	31.00	324.96	6.36 N	324.96 W	325.02@	271.12	11.94
9501.00	75.89	269.77	9308.02	32.00	355.64	6.18 N	355.64 W	355.69@	270.99	14.58
9521.00	79.23	270.22	9312.33	20.00	375.17	6.17 N	375.17 W	375.22@	270.94	16.84

PathFinder Energy Services, Inc.

Survey Report

MARBOB ENERGY CORPRATION
FALCON FEDERAL #2
Lea County COUNTY, New Mexico
RIG:Patriot 2

Page 02/03

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Course Length (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft) (ft)		Closure Dist Dir (ft) (deg)		DLS (dg/100ft)
9562.00	85.38	270.89	9317.82	41.00	415.78	6.57 N	415.78 W	415.83@	270.91	15.09
9594.00	87.93	271.09	9319.69	32.00	447.71	7.12 N	447.71 W	447.77@	270.91	7.99
9627.00	87.32	270.64	9321.05	33.00	480.68	7.62 N	480.68 W	480.74@	270.91	2.30
9659.00	86.79	270.60	9322.70	32.00	512.64	7.96 N	512.64 W	512.70@	270.89	1.66
9690.00	88.11	270.23	9324.08	31.00	543.61	8.19 N	543.61 W	543.67@	270.86	4.42
9722.00	90.04	268.47	9324.59	32.00	575.60	7.83 N	575.60 W	575.65@	270.78	8.16
9754.00	89.78	267.54	9324.64	32.00	607.58	6.71 N	607.58 W	607.61@	270.63	3.02
9786.00	89.25	267.42	9324.91	32.00	639.54	5.31 N	639.54 W	639.57@	270.48	1.70
9817.00	89.69	267.00	9325.20	31.00	670.51	3.80 N	670.51 W	670.52@	270.32	1.96
9849.00	91.19	265.96	9324.96	32.00	702.44	1.83 N	702.44 W	702.45@	270.15	5.70
9881.00	92.51	264.90	9323.92	32.00	734.32	0.72 S	734.32 W	734.32@	269.94	5.29
9913.00	92.68	263.67	9322.47	32.00	766.13	3.90 S	766.13 W	766.14@	269.71	3.88
9945.00	92.59	263.41	9321.00	32.00	797.90	7.50 S	797.90 W	797.93@	269.46	0.86
9976.00	92.51	263.47	9319.62	31.00	828.66	11.03 S	828.66 W	828.74@	269.24	0.32
10008.00	92.24	263.47	9318.30	32.00	860.43	14.67 S	860.43 W	860.55@	269.02	0.84
10040.00	91.80	262.81	9317.17	32.00	892.18	18.49 S	892.18 W	892.37@	268.81	2.48
10072.00	90.66	261.50	9316.48	32.00	923.87	22.86 S	923.87 W	924.15@	268.58	5.43
10103.00	89.78	259.49	9316.36	31.00	954.44	27.98 S	954.44 W	954.85@	268.32	7.08
10135.00	88.72	258.42	9316.78	32.00	985.85	34.11 S	985.85 W	986.44@	268.02	4.71
10167.00	87.32	257.12	9317.89	32.00	1017.10	40.88 S	1017.10 W	1017.92@	267.70	5.97
10199.00	87.32	257.85	9319.38	32.00	1048.30	47.81 S	1048.30 W	1049.39@	267.39	2.28
10231.00	87.93	258.35	9320.71	32.00	1079.59	54.40 S	1079.59 W	1080.96@	267.12	2.46
10262.00	89.25	259.09	9321.47	31.00	1109.98	60.46 S	1109.98 W	1111.63@	266.88	4.88
10294.00	90.48	260.28	9321.55	32.00	1141.46	66.19 S	1141.46 W	1143.38@	266.68	5.35
10326.00	90.75	261.54	9321.20	32.00	1173.06	71.25 S	1173.06 W	1175.22@	266.52	4.03
10358.00	90.75	263.09	9320.79	32.00	1204.77	75.52 S	1204.77 W	1207.13@	266.41	4.84
10390.00	91.10	264.86	9320.27	32.00	1236.58	78.88 S	1236.58 W	1239.10@	266.35	5.64
10422.00	91.01	265.98	9319.68	32.00	1268.48	81.44 S	1268.48 W	1271.09@	266.33	3.51
10454.00	91.54	266.83	9318.97	32.00	1300.41	83.44 S	1300.41 W	1303.08@	266.33	3.13

PathFinder Energy Services, Inc.

Survey Report

MARBOB ENERGY CORPRATION
FALCON FEDERAL #2
Lea County COUNTY, New Mexico
RIG:Patriot 2

Page 03/03

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Course Length (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft) (ft)		Closure Dist Dir (ft) (deg)		DLS (dg/100ft)
10486.00	91.36	267.80	9318.16	32.00	1332.36	84.94 S	1332.36 W	1335.06@	266.35	3.08
10518.00	91.36	268.05	9317.40	32.00	1364.33	86.10 S	1364.33 W	1367.04@	266.39	0.78
10550.00	91.89	268.82	9316.49	32.00	1396.30	86.97 S	1396.30 W	1399.01@	266.44	2.92
10581.00	91.71	268.65	9315.52	31.00	1427.28	87.66 S	1427.28 W	1429.97@	266.49	0.80
10613.00	91.54	268.60	9314.61	32.00	1459.26	88.43 S	1459.26 W	1461.94@	266.53	0.55
10645.00	91.63	268.69	9313.72	32.00	1491.24	89.18 S	1491.24 W	1493.90@	266.58	0.40
10677.00	91.45	268.62	9312.86	32.00	1523.22	89.93 S	1523.22 W	1525.87@	266.62	0.60
10708.00	91.63	268.68	9312.03	31.00	1554.20	90.66 S	1554.20 W	1556.84@	266.66	0.61
10740.00	91.36	268.53	9311.20	32.00	1586.18	91.44 S	1586.18 W	1588.81@	266.70	0.97
10772.00	91.01	268.79	9310.53	32.00	1618.16	92.19 S	1618.16 W	1620.79@	266.74	1.36
10804.00	90.75	268.46	9310.04	32.00	1650.15	92.96 S	1650.15 W	1652.76@	266.78	1.31
10836.00	90.31	268.26	9309.75	32.00	1682.13	93.87 S	1682.13 W	1684.75@	266.81	1.51
10866.00	90.13	268.32	9309.63	30.00	1712.12	94.77 S	1712.12 W	1714.74@	266.83	0.63
10897.00	90.04	268.24	9309.59	31.00	1743.11	95.70 S	1743.11 W	1745.73@	266.86	0.39
10929.00	89.69	267.70	9309.66	32.00	1775.09	96.83 S	1775.09 W	1777.73@	266.88	2.01
10961.00	89.25	267.28	9309.96	32.00	1807.05	98.23 S	1807.05 W	1809.72@	266.89	1.90
10993.00	88.55	267.50	9310.57	32.00	1839.01	99.69 S	1839.01 W	1841.71@	266.90	2.29
11025.00	88.99	267.20	9311.26	32.00	1870.97	101.17 S	1870.97 W	1873.71@	266.90	1.66
11047.00	88.99	266.96	9311.65	22.00	1892.94	102.29 S	1892.94 W	1895.70@	266.91	1.09
STRAIGHT-LINE PROJECTION TO BIT @11120'MD.										
11120.00	88.99	266.96	9312.93	73.00	1965.83	106.16 S	1965.83 W	1968.69@	266.91	0.00