

Submit 3 Copies To Appropriate District  
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

30-025-04903

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

B-1732

7. Lease Name or Unit Agreement Name:

W.A. Ramsay (NCT-A)

8. Well No.

34

9. Pool name or Wildcat

Eumont, Yates, 7 Rvrs, Queen

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH  
PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Chevron USA Inc

3. Address of Operator

15 Smith Rd, Midland, TX, 79705

4. Well Location

Unit Letter K : 1980 feet from the South line and 1980 feet from the West line

Section 34 Township 21-S Range 36-E NMPM Lea County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐


CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24 hrs prior to MI and RU.
2. Set 5 1/2" CIBP at 3700, spot 25sx, plug 3700-3500 (Queen) WOC Tag.
3. Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL.
4. Spot 25sx, plug 3200-3000 (B-Salt, Yates).
5. Spot 25sx, plug 1600-1400 (T-Salt) WOC Tag.
6. Perf 4 holes at 440, sqz 125sx, plug 440-Surf 5 1/2 x 8 5/8 (8 5/8 Shoe, Surf) WOC Tag.
7. Install dry hole marker.

THE COMMISSION MUST BE NOTIFIED 24  
HOURS PRIOR TO THE BEGINNING OF  
PLUGGING OPERATIONS FOR THE C-103  
TO BE APPROVED.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

*G.R. Bledsoe*

TITLE

HES Specialist

DATE

1/6/2004

Type or print name G.R. Bledsoe

Telephone No. (432) 687-7153

(This space for State use)

APPROVED BY

*Chris Williams*

OC DISTRICT SUPERVISOR/GENERAL MANAGER

DATE

JAN 12 2004

Conditions of approval, if any:

# PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR CHEVRON USA INC.

LEASE NAME W.A. RAMSAY (NCT-A)


WELL # 34

SECT 34 TWN 21-S RNG 36-E

FROM 1980 N/S/L 1980 E/W/L

TD 3953 FORMATION @ TD QUEEN

PBTD  FORMATION @ PBTD

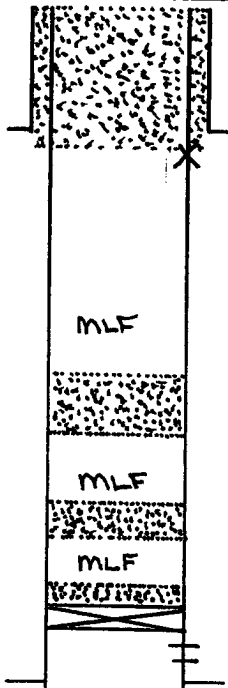

8 5/8

@ 381

TOC SURF

5 1/2

@ 3865

TOC 770

TD 3953

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	8 5/8	381	SURF	Circ
INTMED 1				
INTMED 2				
PROD	5 1/2	3865	770	T.S

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1	PERFS	3753- 3854
INTMED 2	OPENHOLE	
PROD		

\*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	CIBP	25	3700
YATES	2	B-SALT	25	3200
QUEEN	3	T-SALT	25	1600
GRAYBURG	4	8 5/8 S	125	440
SAN ANDRES				
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				