

Submit 1 Copy To Appropriate District Office
District I
1625 N French Dr, Hobbs, NM 88240
District II
1301 W Grand Ave, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S St Francis Dr, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

RECEIVED

JAN 28 2010

HOBBSOCD

OIL CONSERVATION DIVISION
1220 South St. Francis Dr
Santa Fe, NM 87505

WELL API NO 30-025-35098
5. Indicate Type of Lease STATE ☒ FEE ☐
6 State Oil & Gas Lease No VO-4715
7. Lease Name or Unit Agreement Name Rock Ridge AWD State
8 Well Number 1
9. OGRID Number 025575
10. Pool name or Wildcat Austin; Wolfcamp, Southwest

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 South Fourth Street, Artesia, NM 88210

4. Well Location
Unit Letter F : 1800 feet from the North line and 1980 feet from the West line
Section 10 Township 15S Range 35E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3997' GR

12 Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13 Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7 14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug & abandon this well as follows.

- MIRU. Load hole ND wellhead. NU BOP Release TAC & TOH.
- Circulate hole w/plugging mud. Spot 100' cement plug 11,188-11,088'. WOC & tag Spot 100' cement plug 10,402-10,302'.
WOC & tag. 25sx.
- Spot 100' cement plug 9286-9186'. Spot 100' cement plug 6500-6400'.
- Spot 100' cement plug 4722-4622' WOC & tag Spot 100' cement plug 2050-1950'.
25sx.
- Spot 100' cement plug 478-378' WOC & tag Spot 100' cement plug @ surface
- Cut off wellhead, install marker, clean location

* All plugs to be 25sx.
CMT.

(Proposed schematic attached.)

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief

SIGNATURE Allison Barton TITLE Regulatory Compliance Technician DATE 1/11/10


Type or print name Allison Barton E-mail address abarton@yatespetroleum.com PHONE (575) 748-1471
For State Use Only

APPROVED BY [Signature] TITLE DISTRICT 1 SUPERVISOR DATE JAN 29 2010
Conditions of Approval (if any)

Well Name: Rock Ridge AWD No. 1 Field: _____
 Location: 1800' FNL & 1980' FWL Sec 10-15S-35E Lea Co, NM
 GL: 3997' Zero: _____ AGL: _____ KB: 4015'
 Spud Date: 11/3/00 Completion Date: _____
 Comments: _____

Casing Program	
Size/Wt/Grade/Conn	Depth Set
11 3/4" 42# H40	428'
8 5/8" 32# H80 & J55	4672'
5 1/2" 17 & 20# P110, N80 & L80	13930'

CURRENT CONFIGURATION

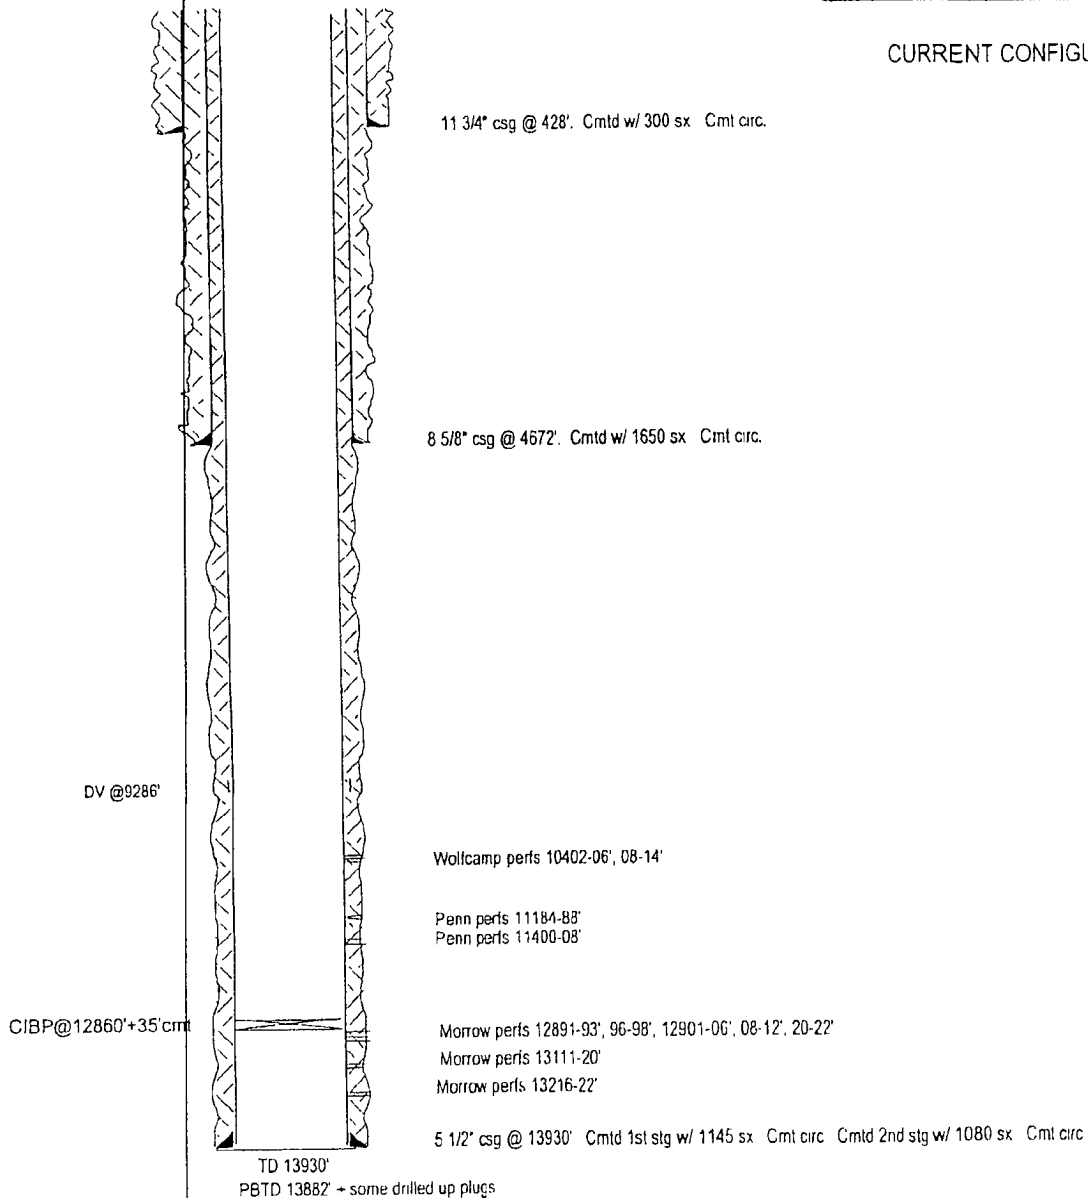


SKETCH NOT TO SCALE

DATE: 11/5/09 RKRDG1B

Well Name: Rock Ridge AWD No 1 Field: _____
 Location: 1800' FNL & 1980' FWL Sec 10-15S-35E Lea Co, NM
 GL: 3997' Zero: _____ AGL: _____ KB: 4015'
 Spud Date: 11/3/00 Completion Date: _____
 Comments: _____

Casing Program	
Size/Wt/Grade/Conn	Depth Set
11 3/4" 42# H40	428'
8 5/8" 32# H80 & J55	4672'
5 1/2" 17 & 20# P110, N80 & L80	13930'

PROPOSED CONFIGURATION

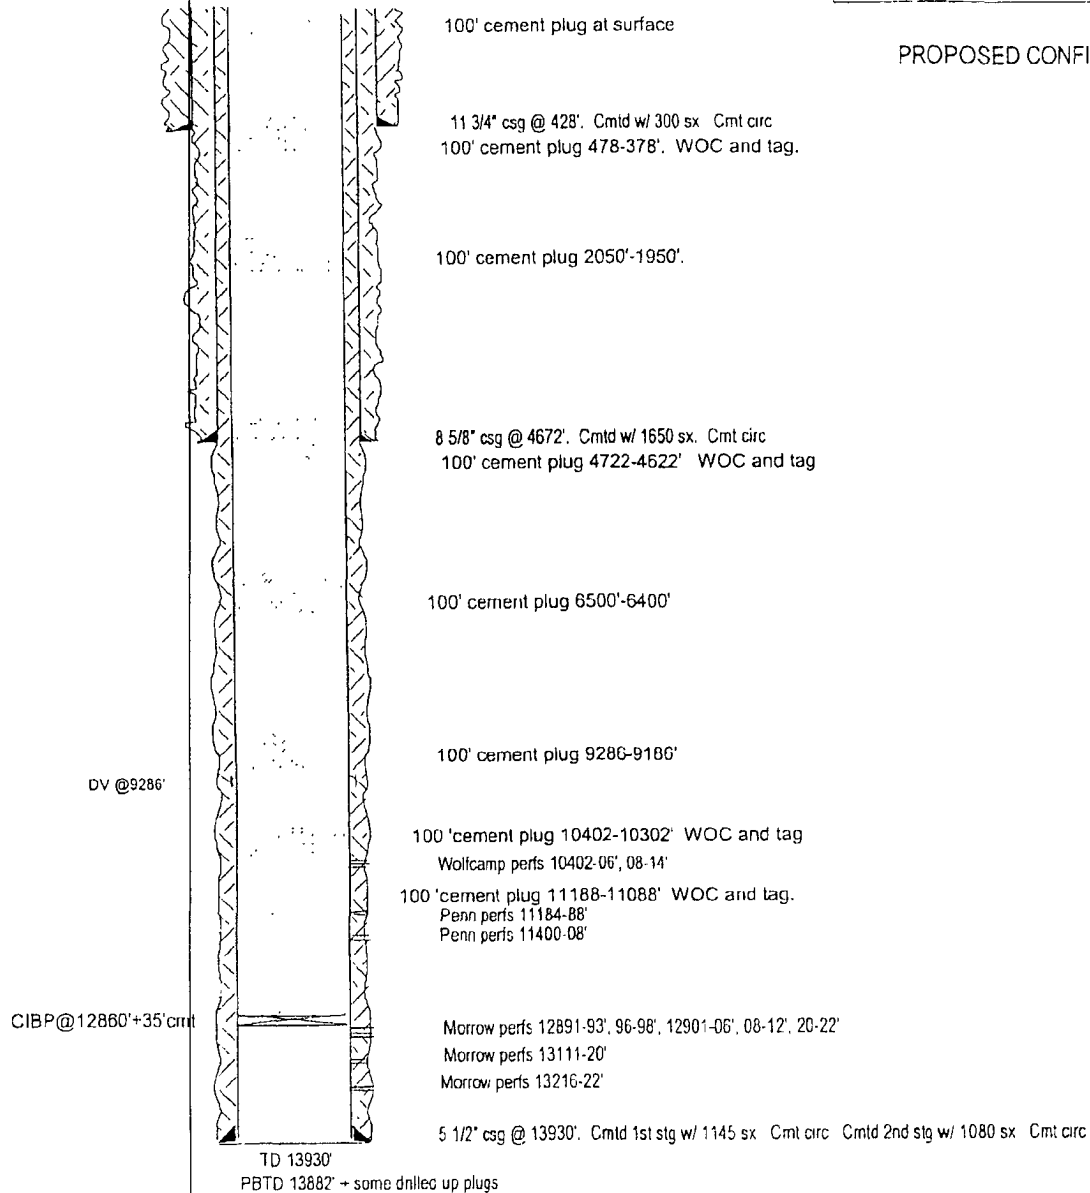


SKETCH NOT TO SCALE

DATE: 11/5/09 RKR DG1C

Yates Petroleum Corporation

Typical 3,000 psi Pressure System Schematic

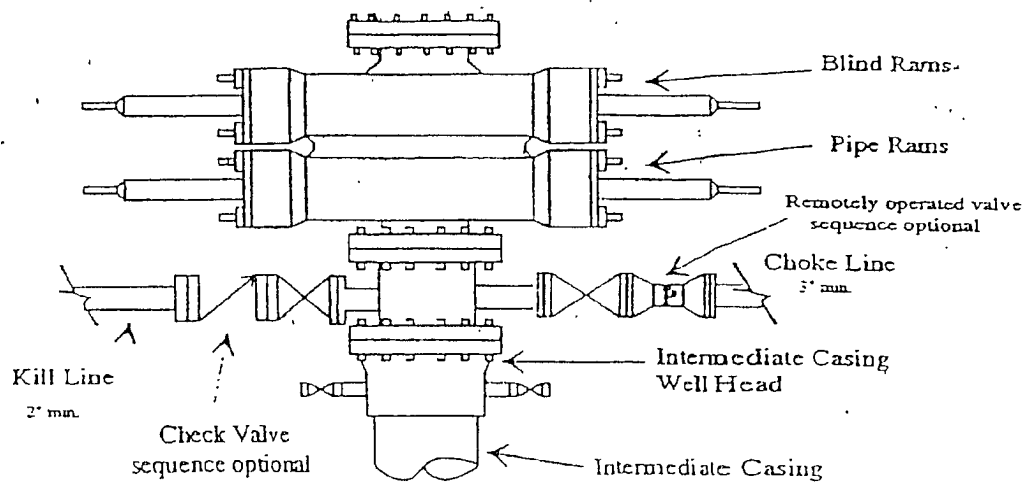

Typical 3,000 psi choke manifold assembly with at least these minimum features

