

Submit 3 Copies To Appropriate District
Office
District I
1625 N French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

RECEIVED
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
MAR 08 2010
HOBBSD

WELL API NO. 30-025-20625 ✓
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. S-9943
7. Lease Name or Unit Agreement Name: State AD ✓
8. Well Number 6 /
9. OGRID Number 16696 /
10. Pool name or Wildcat Mescalero San Andres

11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4325'	
---	--

Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>	
Pit type _____	Depth to Groundwater _____
Distance from nearest fresh water well _____	
Distance from nearest surface water _____	
Pit Liner Thickness: _____ mil	Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other _____	
2. Name of Operator OXY USA Inc. ✓	
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	
4. Well Location Unit Letter <u>H</u> : <u>1980</u> feet from the <u>north</u> line and <u>330</u> feet from the <u>east</u> line Section <u>22</u> Township <u>10S</u> Range <u>32E</u> NMPM County <u>Lea</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4325'	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPLETION <input type="checkbox"/>
OTHER: <input type="checkbox"/>	

SUBSEQUENT REPORT OF:

REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 3/4/10
E-mail address: david_stewart@oxy.com
Type or print name David Stewart Telephone No. 432-685-5717

For State Use Only

APPROVED BY Ed Pennington TITLE STAFF MGR DATE 3-10-10

Conditions of Approval, if any:

THE OIL CONSERVATION DIVISION **MUST**
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS

TD-4450' PBTD-4397' Perfs-4077-4145'

8-5/8" 24# csg @ 397' w/ 325sx, 11-1/4" hole, TOC-Surf-Circ
4-1/2" 9.5# csg @ 4448' w/ 250sx, 7-7/8" hole, TOC-3230'-TS

1. RIH & Set CIBP @ 4027', M&P 25sx cmt
 2. M&P 25sx @ 3475-3340' WOC-Tag
 3. Perf @ 2275', sqz 40sx cmt to 2150' WOC-Tag
 4. Perf @ 1625', sqz 40sx cmt to 1510' WOC-Tag
 5. Perf @ 422', sqz 40sx cmt to 322' WOC-Tag
 6. Perf @ 100', sqz 40sx cmt to Surface
- 10# MLF between plugs

OXY USA Inc. - Proposed
State AD #6
API No. 30-025-20625

40sx @ 100'-Surface

40sx @ 422-322' WOC-Tag


40sx @ 1625-1510' WOC-Tag

40sx @ 2275-2150' WOC-Tag

25sx @ 3475-3340'

CIBP @ 4027' w/ 25sx

PB-4397'

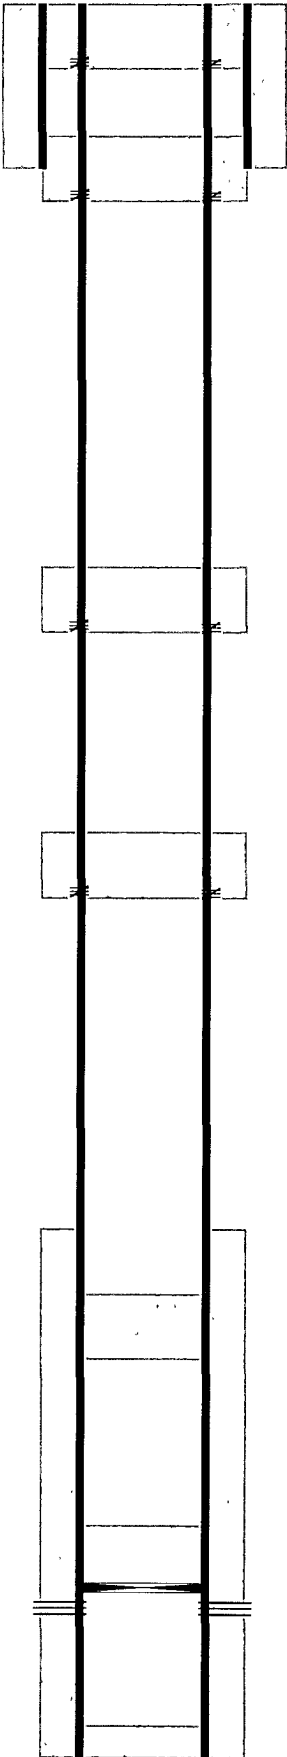

Perf @ 100'

Perf @ 422'

Perf @ 1625'

Perf @ 2275'

Perfs @ 4077-4145'

11-1/4" hole @ 397'
8-5/8" csg @ 397'
w/ 325sx-TOC-Surf-Circ

7-7/8" hole @ 4450'
4-1/2" csg @ 4448'
w/ 250sx-TOC-3230'-TS

TD-4450'

OXY USA Inc.
State AD #6
API No. 30-025-20625

11-1/4" hole @ 397'
8-5/8" csg @ 397'
w/ 325sx-TOC-Surf-Circ

7-7/8" hole @ 4450'
4-1/2" csg @ 4448'
w/ 250sx-TOC-3230'-TS

Perfs @ 4077-4145'

PB-4397'

TD-4450'