


DUPLICATE

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

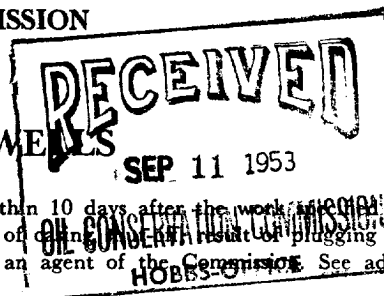

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

## Indicate Nature of Report by Checking Below

|   |  |   |                                     |                          |  |
|---|--|---|-------------------------------------|--------------------------|--|
| REPORT ON BEGINNING DRILLING OPERATIONS |  | REPORT ON RESULT OF TEST OF CASING SHUT-OFF | <input checked="" type="checkbox"/> | REPORT ON REPAIRING WELL |  |
| REPORT ON RESULT OF PLUGGING WELL       |  | REPORT ON RECOMPLETION OPERATION            |                                     | REPORT ON (Other)        |  |

September 11, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Cities Production Corporation

(Company or Operator)

State AD

(Lease)

Cactus Drilling Company

(Contractor)

3

SE

SE

22

Well No. 3 in the SE 1/4 of Sec. 22

T. 10S, R. 32E, NMPM, Mescalero-Devonian Pool, Lea County.

9-9-53 through 9-11-53

The Dates of this work were as follows:

(Not required)

Notice of intention to do the work (was) (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_,

(Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

State "AD" #3 was drilled to a total depth of 10,162' in lime and shale, PB total depth 8555'. Ran 8319.13' (245 2/3 jts) of 5 1/2" OD 15.5# & 17# J-55 and N-80 Casing set at 8330' and cemented with 200 sacks regular neat cement. Plug down at 5:15 A.M. 9-9-53. Cement was allowed to set 48 hours, 1000# pressure was applied for 30 min with no drop in pressure, test was satisfactory.

Witnessed by C. M. Hartwell Cities Production Corporation District Superintendent  
(Name) (Company) (Title)

Approved: OIL CONSERVATION COMMISSION

J. G. Stanley  
(Name)

Engineer District 1  
(Title)

SEP 11 1953  
(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name C. M. Hartwell  
Position District Superintendent

Representing Cities Service Oil Company

Address Box 97, Hobbs, New Mexico