


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

(Form C-103)
(Revised 7/1/52)

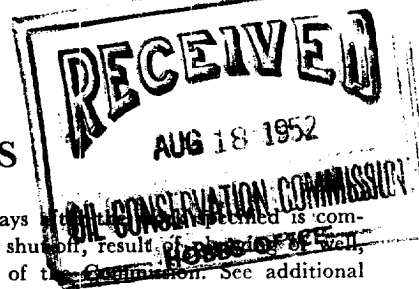

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after completion of the work. The report should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

August 14, 1952
(Date)

Monument, New Mexico
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Amerada Petroleum Corporation -
(Company or Operator)

State MthBⁿ
(Lease)

Noble Drilling Corporation
(Contractor)

Well No. **1** in the **C/SW 1/4** **SE 1/4** of Sec. **11**

T. **11-S**, R. **32-E**, NMPM., **Wildcat** Pool, **Lea** County.

The Dates of this work were as follows: **August 13, 1952**

Notice of intention to do the work ~~was~~ (was not) submitted on Form C-102 on _____, 19____, (Cross out incorrect words)

and approval of the proposed plan ~~was~~ (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

11060' Total Depth. 8825' PED. 8421' DOD - Lime. Finished drilling 7-7/8" hole at 2 AM, 8/8/52. Ran Schlumberger's Surveys. Spotted cement plug from 11060' to 10946' with 35 sacks regular cement. Spotted cement plug from 8885' to 8781' with 65 sacks cement. Drilled cement out to 8825'. Ran 250 Jts of 5 1/2" OD casing set @ 8450' with 150 Sacks cement. Pumped plug to 8389' at 8:30 AM, 8/12/52 - Max pressure 1100#. After W.O.C. for 24 hours, drilled cement from 8389' to 8421' - Tested 5 1/2" casing with 1000# for 1/2 hour before and after drilling cement - no pressure drop. Continued with completion operations -

Witnessed by **E. A. Buchanan**
(Name)

Amerada Petroleum Corporation
(Company)

Farm Boss
(Title)

Approved: **OIL CONSERVATION COMMISSION**

Roy Yankrough
(Name)
Oil & Gas Inspector
(Title)

AUG 20 1952
(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name **Dw. J. [Signature]**

Position **Assistant District Superintendent**

Representing **Amerada Petroleum Corporation**

Address **Drawer D, Monument, New Mexico**

Copy 1